



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®_rate2006 = 84.9

PowerEdge R300 (Intel Xeon X5460, 3.16 GHz)

SPECint_rate_base2006 = 79.2

CPU2006 license: 55


Test date: Oct-2008

Test sponsor: Dell Inc.

Hardware Availability: Mar-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

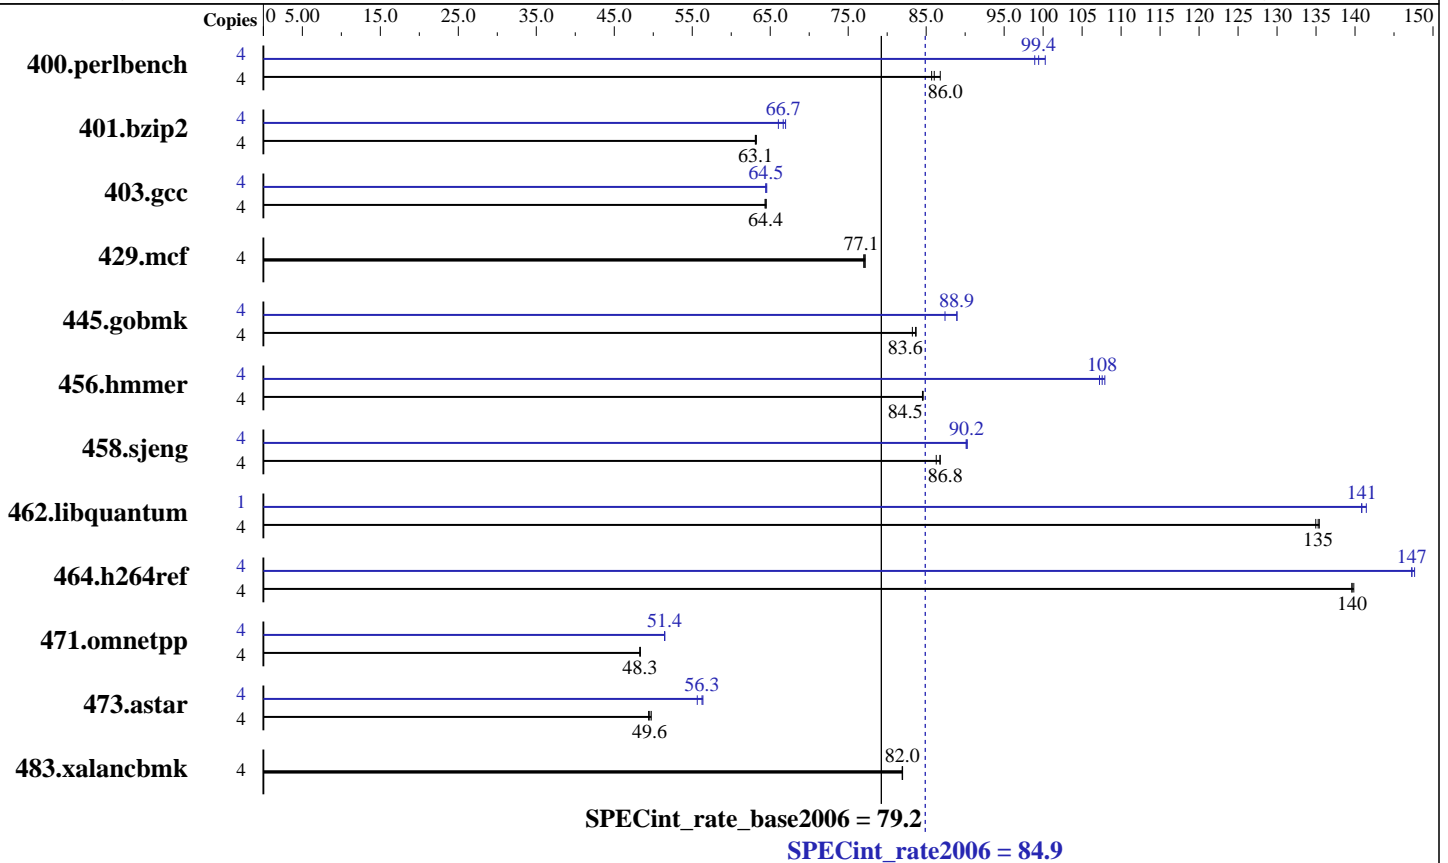

Hardware

CPU Name: Intel Xeon X5460
 CPU Characteristics:
 CPU MHz: 3166
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (4 x 4 GB DDR2-667 FBDIMM)
 Disk Subsystem: 2 x 36 GB 10000 RPM SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.042
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 84.9

PowerEdge R300 (Intel Xeon X5460, 3.16 GHz)

SPECint_rate_base2006 = 79.2

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Oct-2008
Hardware Availability: Mar-2008
Software Availability: Nov-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	454	86.0	456	85.7	450	86.8	4	390	100	395	98.9	393	99.4
401.bzip2	4	611	63.1	612	63.1	611	63.2	4	584	66.0	579	66.7	576	67.0
403.gcc	4	500	64.3	499	64.5	500	64.4	4	499	64.5	500	64.4	499	64.6
429.mcf	4	473	77.2	474	77.0	473	77.1	4	473	77.2	474	77.0	473	77.1
445.gobmk	4	502	83.6	504	83.2	501	83.7	4	472	88.9	480	87.4	472	89.0
456.hammer	4	442	84.5	441	84.6	441	84.5	4	347	108	348	107	346	108
458.sjeng	4	558	86.8	561	86.3	558	86.8	4	537	90.1	537	90.2	536	90.3
462.libquantum	4	614	135	612	135	613	135	1	146	141	147	141	147	141
464.h264ref	4	634	140	633	140	634	140	4	601	147	600	148	601	147
471.omnetpp	4	517	48.3	518	48.3	518	48.3	4	486	51.4	486	51.4	486	51.5
473.astar	4	564	49.7	568	49.4	567	49.6	4	498	56.4	499	56.3	505	55.6
483.xalancbmk	4	337	81.9	337	82.0	337	82.0	4	337	81.9	337	82.0	337	82.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

General Notes

taskset was used to bind processes to cores except for 462.libquantum peak
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 64M

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 84.9

PowerEdge R300 (Intel Xeon X5460, 3.16 GHz)

SPECint_rate_base2006 = 79.2

CPU2006 license: 55

Test date: Oct-2008

Test sponsor: Dell Inc.

Hardware Availability: Mar-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

Base Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/042/bin/intel64/icc
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include

456.hmmer: /opt/intel/Compiler/11.0/042/bin/intel64/icc
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 84.9

PowerEdge R300 (Intel Xeon X5460, 3.16 GHz)

SPECint_rate_base2006 = 79.2

CPU2006 license: 55

Test date: Oct-2008

Test sponsor: Dell Inc.

Hardware Availability: Mar-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-prefetch -ansi-alias

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3

429.mcf: basepeak = yes

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4

462.libquantum: -xSSE4.1 -ipo -O3 -no-prec-div -static
-opt-malloc-options=3 -parallel -par-runtime-control
-opt-prefetch

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 84.9

PowerEdge R300 (Intel Xeon X5460, 3.16 GHz)

SPECint_rate_base2006 = 79.2

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Oct-2008

Hardware Availability: Mar-2008

Software Availability: Nov-2008

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.02.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.11.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.02.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.11.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 21:30:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 December 2008.