SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX150 S6, Intel Xeon L3360, 2.83 GHz

SPECint®_rate2006 = 81.2

SPECint_rate_base2006 = 75.7

CPU2006 license: 22
Test sponsor: Fujitsu Siemens Computers
Tested by: Fujitsu Siemens Computers

Test date: Jan-2009
Hardware Availability: Apr-2009
Software Availability: Nov-2008

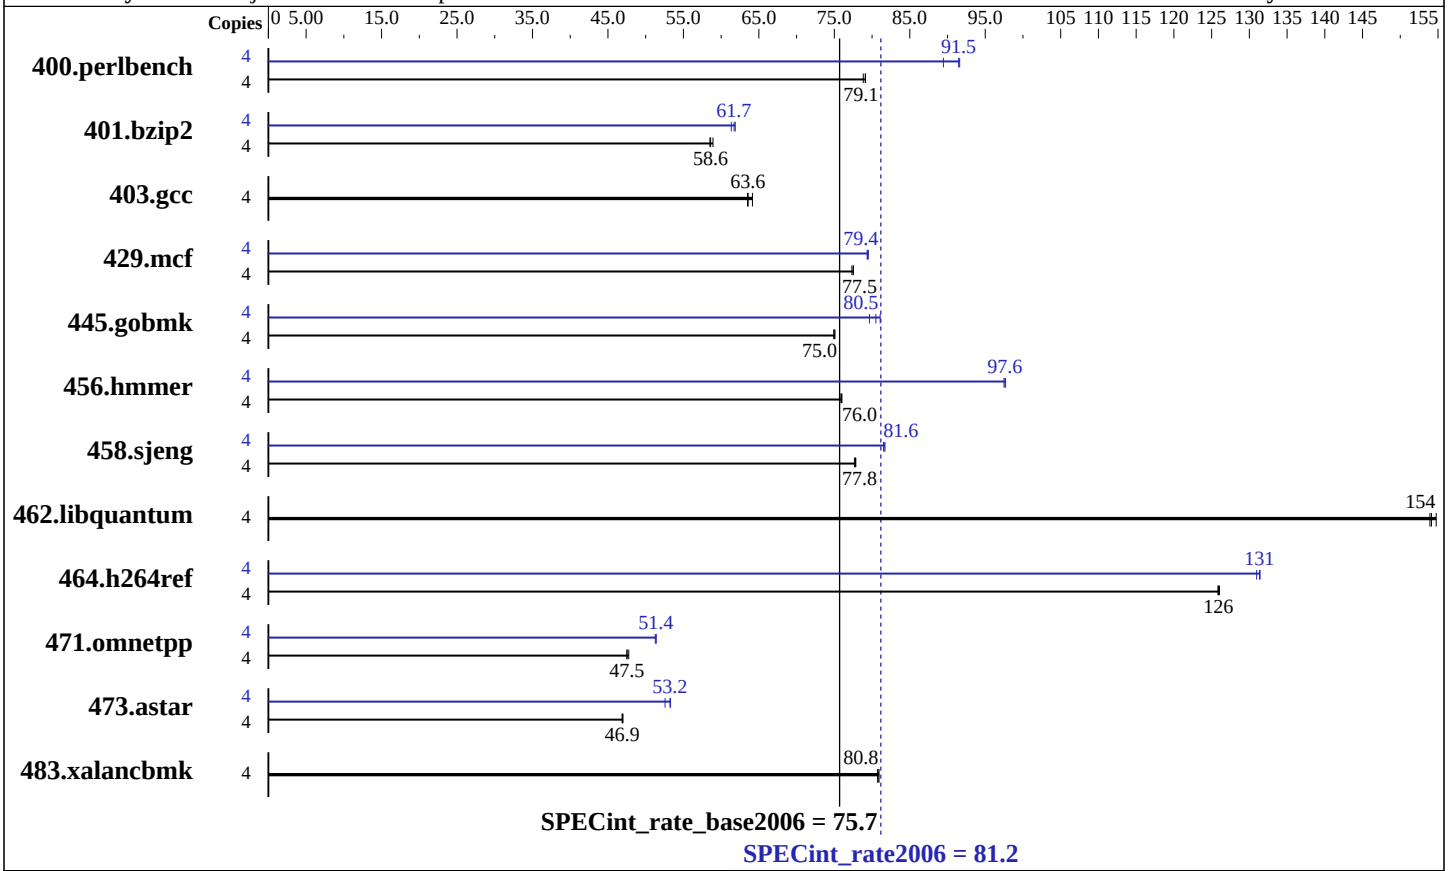

Hardware

CPU Name:	Intel Xeon L3360
CPU Characteristics:	1333 MHz system bus
CPU MHz:	2833
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	8 GB (4x2 GB PC2-6400E, 2 rank, CL6-6-6, ECC)
Disk Subsystem:	1x SATA, 160 GB, 7200 rpm
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler:	Intel C++ Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.066
Auto Parallel:	No
File System:	ext3
System State:	Multi-User Run Level 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap Library, Version 8.1 Binutils 2.18.50.0.7.20080502

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX150 S6, Intel Xeon L3360, 2.83 GHz

SPECint_rate2006 = 81.2

SPECint_rate_base2006 = 75.7

CPU2006 license: 22
Test sponsor: Fujitsu Siemens Computers
Tested by: Fujitsu Siemens Computers

Test date: Jan-2009
Hardware Availability: Apr-2009
Software Availability: Nov-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	496	78.8	494	79.1	**494**	**79.1**	4	437	89.5	**427**	**91.5**	427	91.6
401.bzip2	4	660	58.5	**659**	**58.6**	655	58.9	4	**625**	**61.7**	624	61.9	629	61.3
403.gcc	4	**506**	**63.6**	502	64.1	507	63.5	4	**506**	**63.6**	502	64.1	507	63.5
429.mcf	4	471	77.5	472	77.3	**471**	**77.5**	4	**459**	**79.4**	459	79.5	460	79.4
445.gobmk	4	559	75.1	**560**	**75.0**	560	74.9	4	527	79.7	518	81.1	**521**	**80.5**
456.hmmer	4	491	76.0	492	75.9	**491**	**76.0**	4	**382**	**97.6**	383	97.5	382	97.7
458.sjeng	4	**622**	**77.8**	623	77.7	622	77.8	4	594	81.5	**593**	**81.6**	592	81.7
462.libquantum	4	536	155	**538**	**154**	538	154	4	536	155	**538**	**154**	538	154
464.h264ref	4	702	126	703	126	**703**	**126**	4	674	131	**674**	**131**	676	131
471.omnetpp	4	526	47.5	**526**	**47.5**	524	47.8	4	487	51.4	**487**	**51.4**	488	51.3
473.astar	4	**598**	**46.9**	598	47.0	599	46.9	4	527	53.3	534	52.6	**528**	**53.2**
483.xalancbmk	4	341	80.9	**342**	**80.8**	342	80.7	4	341	80.9	**342**	**80.8**	342	80.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 taskset has been used to bind processes to cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
```

Platform Notes

```
BIOS configuration:
Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable
```

General Notes

```
For information about Fujitsu Siemens Computers please see:
http://www.fujitsu-siemens.com
```

Base Compiler Invocation

C benchmarks:

```
icc
```

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/Compiler/11.0/066/bin/intel64/icc

456.hmmer: /opt/intel/Compiler/11.0/066/bin/intel64/icc

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-prefetch -ansi-alias

403.gcc: basepeak = yes

429.mcf: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.04.html`
`http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090710.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.04.xml`
`http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090710.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 23:08:47 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 March 2009.