



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

### SPECint®\_rate2006 = 87.4

PRIMERGY RX100 S5, Intel Xeon X3380, 3.16 GHz

### SPECint\_rate\_base2006 = 81.6

CPU2006 license: 22


Test date: Feb-2009

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Apr-2009

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2008

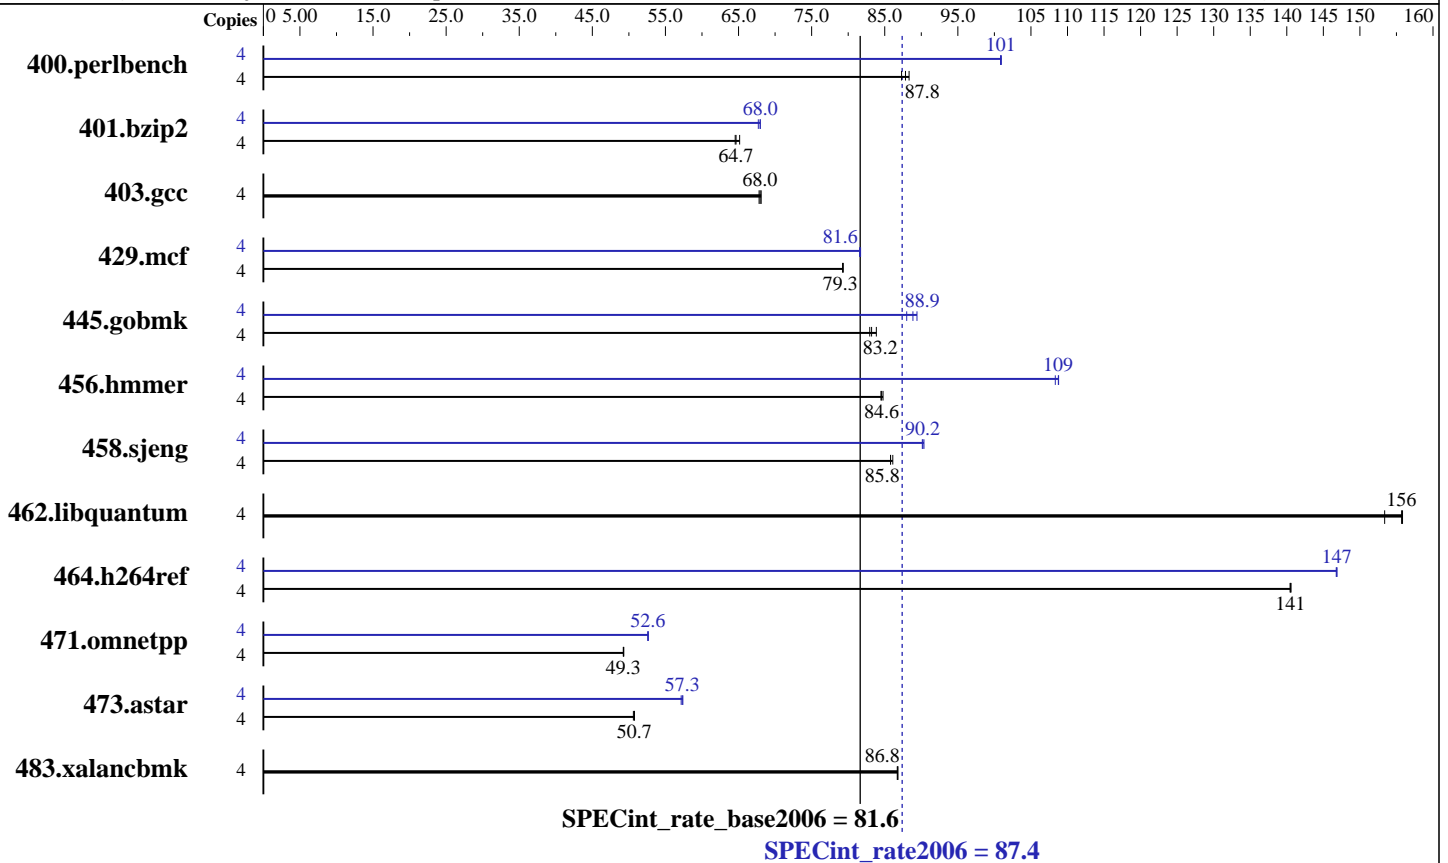

### Hardware

CPU Name: Intel Xeon X3380  
 CPU Characteristics: 1333 MHz system bus  
 CPU MHz: 3167  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 8 GB (4x2 GB PC2-6400E, 2 rank, CL6-6-6, ECC)  
 Disk Subsystem: 1x SATA, 250 GB, 7200 rpm  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2, Kernel 2.6.16.60-0.21-smp  
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20080730 Package ID: l\_cproc\_b\_11.0.066  
 Auto Parallel: No  
 File System: ext3  
 System State: Multi-User Run Level 3  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap Library, Version 8.1 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

SPECint\_rate2006 = 87.4

PRIMERGY RX100 S5, Intel Xeon X3380, 3.16 GHz

SPECint\_rate\_base2006 = 81.6

CPU2006 license: 22

Test date: Feb-2009

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Apr-2009

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2008

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	<b>445</b>	<b>87.8</b>	448	87.3	442	88.3	4	<b>387</b>	<b>101</b>	387	101	388	101
401.bzip2	4	592	65.2	<b>597</b>	<b>64.7</b>	598	64.5	4	<b>568</b>	<b>68.0</b>	568	68.0	570	67.7
403.gcc	4	473	68.1	475	67.8	<b>474</b>	<b>68.0</b>	4	473	68.1	475	67.8	<b>474</b>	<b>68.0</b>
429.mcf	4	460	79.3	<b>460</b>	<b>79.3</b>	460	79.2	4	447	81.7	<b>447</b>	<b>81.6</b>	447	81.6
445.gobmk	4	<b>504</b>	<b>83.2</b>	500	83.9	506	82.9	4	477	88.0	<b>472</b>	<b>88.9</b>	469	89.4
456.hammer	4	440	84.8	442	84.5	<b>441</b>	<b>84.6</b>	4	<b>343</b>	<b>109</b>	344	108	343	109
458.sjeng	4	562	86.1	<b>564</b>	<b>85.8</b>	564	85.8	4	537	90.1	<b>537</b>	<b>90.2</b>	536	90.4
462.libquantum	4	532	156	540	153	<b>532</b>	<b>156</b>	4	532	156	540	153	<b>532</b>	<b>156</b>
464.h264ref	4	630	141	630	140	<b>630</b>	<b>141</b>	4	603	147	<b>603</b>	<b>147</b>	603	147
471.omnetpp	4	508	49.2	507	49.3	<b>508</b>	<b>49.3</b>	4	<b>475</b>	<b>52.6</b>	475	52.6	475	52.6
473.astar	4	555	50.6	553	50.8	<b>553</b>	<b>50.7</b>	4	491	57.2	489	57.4	<b>490</b>	<b>57.3</b>
483.xalancbmk	4	<b>318</b>	<b>86.8</b>	318	86.7	318	86.8	4	<b>318</b>	<b>86.8</b>	318	86.7	318	86.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
taskset has been used to bind processes to cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

BIOS configuration:  
Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable

## General Notes

The Fujitsu PRIMERGY RX100 S5 and the Fujitsu Siemens Computers PRIMERGY RX100 S5 are electronically equivalent.  
For information about Fujitsu Siemens Computers please see:  
<http://www.fujitsu-siemens.com>

## Base Compiler Invocation

C benchmarks:  
icc

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint\_rate2006 = 87.4

PRIMERGY RX100 S5, Intel Xeon X3380, 3.16 GHz

SPECint\_rate\_base2006 = 81.6

CPU2006 license: 22

Test date: Feb-2009

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Apr-2009

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2008

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-alloc  
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:  
-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc

401.bzip2: /opt/intel/Compiler/11.0/066/bin/intel64/icc  
456.hmmer: /opt/intel/Compiler/11.0/066/bin/intel64/icc

C++ benchmarks:  
icpc



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint\_rate2006 = 87.4

PRIMERGY RX100 S5, Intel Xeon X3380, 3.16 GHz

SPECint\_rate\_base2006 = 81.6

CPU2006 license: 22

Test date: Feb-2009

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Apr-2009

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2008

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
               -no-prec-div -static -ansi-alias -opt-prefetch

```

```

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
           -no-prec-div -static -opt-prefetch -ansi-alias

```

```

403.gcc: basepeak = yes

```

```

429.mcf: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
         -no-prec-div -static -opt-prefetch

```

```

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo
           -no-prec-div -ansi-alias

```

```

456.hmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2
           -ansi-alias

```

```

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
           -no-prec-div -static -unroll4

```

```

462.libquantum: basepeak = yes

```

```

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
             -no-prec-div -static -unroll2 -ansi-alias

```

C++ benchmarks:

```

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
             -no-prec-div -ansi-alias -opt-ra-region-strategy=block
             -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

```

```

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
           -no-prec-div -ansi-alias -opt-ra-region-strategy=routine
           -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

```

```

483.xalancbmk: basepeak = yes

```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint\_rate2006 = 87.4

PRIMERGY RX100 S5, Intel Xeon X3380, 3.16 GHz

SPECint\_rate\_base2006 = 81.6

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Feb-2009

Hardware Availability: Apr-2009

Software Availability: Nov-2008

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.04.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090710.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.04.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090710.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Tue Jul 22 22:29:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 17 March 2009.