



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

SPECint®_rate2006 = 117

NTT Tytan 2206I (Intel Xeon E5410)

SPECint_rate_base2006 = 112

CPU2006 license: 9013


Test date: Jan-2009

Test sponsor: NTT System S. A.

Hardware Availability: Dec-2008

Tested by: NTT System S. A.

Software Availability: Dec-2008

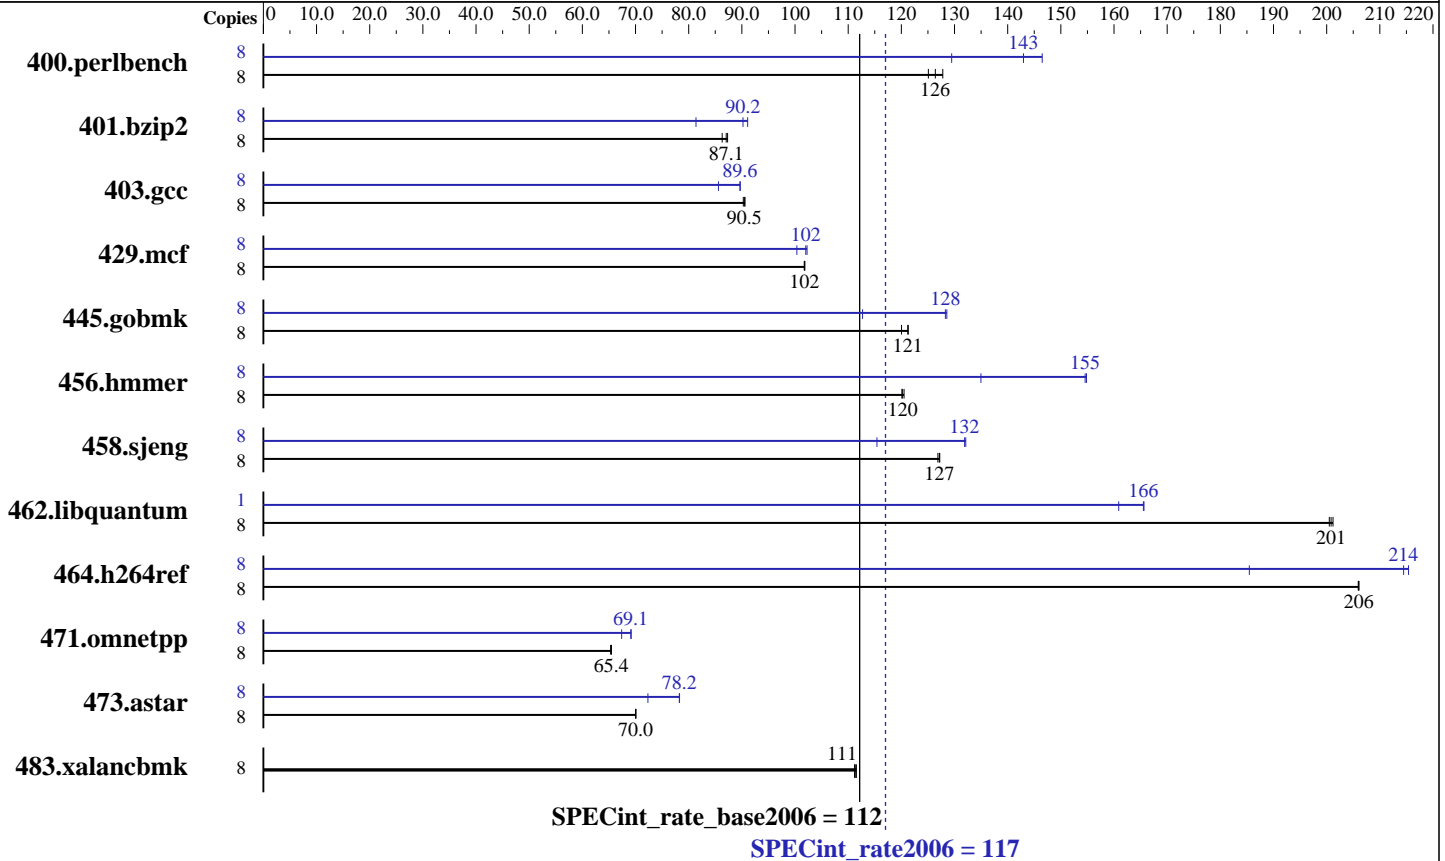

Hardware

CPU Name: Intel Xeon E5410
 CPU Characteristics: 2.33 GHz, 2x6 MB P2 shared, 1333 MHz System Bus
 CPU MHz: 2333
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (4 x 4GB DDR2-667 FBDIMM)
 Disk Subsystem: 147 GB SAS, 1000RPM
 Other Hardware: None

Software

Operating System: SuSe Linux Enterprise Server 10 SP2, Kernel 2.6.16.60-0.21-smpt
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20080930 Package ID: l_cproc_p_11.0.066
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

SPECint_rate2006 = 117

NTT Tytan 2206I (Intel Xeon E5410)

SPECint_rate_base2006 = 112

CPU2006 license: 9013

Test date: Jan-2009

Test sponsor: NTT System S. A.

Hardware Availability: Dec-2008

Tested by: NTT System S. A.

Software Availability: Dec-2008

Results Table

| Benchmark | Base | | | | | | Peak | | | | | | | |
|----------------|--------|------------|-------------|------------|------------|------------|-------------|--------|------------|-------------|------------|-------------|------------|------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 8 | 618 | 126 | 625 | 125 | 612 | 128 | 8 | 547 | 143 | 534 | 146 | 604 | 129 |
| 401.bzip2 | 8 | 895 | 86.3 | 884 | 87.3 | 887 | 87.1 | 8 | 856 | 90.2 | 847 | 91.1 | 949 | 81.4 |
| 403.gcc | 8 | 712 | 90.5 | 713 | 90.3 | 711 | 90.6 | 8 | 718 | 89.7 | 718 | 89.6 | 752 | 85.6 |
| 429.mcf | 8 | 716 | 102 | 717 | 102 | 717 | 102 | 8 | 715 | 102 | 713 | 102 | 727 | 100 |
| 445.gobmk | 8 | 692 | 121 | 699 | 120 | 692 | 121 | 8 | 653 | 129 | 654 | 128 | 745 | 113 |
| 456.hammer | 8 | 619 | 121 | 621 | 120 | 621 | 120 | 8 | 483 | 155 | 482 | 155 | 553 | 135 |
| 458.sjeng | 8 | 763 | 127 | 761 | 127 | 761 | 127 | 8 | 733 | 132 | 734 | 132 | 839 | 115 |
| 462.libquantum | 8 | 827 | 200 | 824 | 201 | 825 | 201 | 1 | 125 | 166 | 125 | 166 | 129 | 161 |
| 464.h264ref | 8 | 859 | 206 | 859 | 206 | 860 | 206 | 8 | 825 | 214 | 822 | 215 | 955 | 185 |
| 471.omnetpp | 8 | 766 | 65.3 | 764 | 65.5 | 764 | 65.4 | 8 | 723 | 69.1 | 723 | 69.2 | 742 | 67.4 |
| 473.astar | 8 | 802 | 70.1 | 802 | 70.0 | 802 | 70.0 | 8 | 718 | 78.2 | 717 | 78.3 | 776 | 72.3 |
| 483.xalancbmk | 8 | 496 | 111 | 495 | 112 | 496 | 111 | 8 | 496 | 111 | 495 | 112 | 496 | 111 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
taskset was used to bind processes to cores except
for 462.libquantum peak

Operating System Notes

OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 64M

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

SPECint_rate2006 = 117

NTT Tytan 2206I (Intel Xeon E5410)

SPECint_rate_base2006 = 112

CPU2006 license: 9013

Test date: Jan-2009

Test sponsor: NTT System S. A.

Hardware Availability: Dec-2008

Tested by: NTT System S. A.

Software Availability: Dec-2008

Base Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/066/bin/intel64/icc

456.hmmer: /opt/intel/Compiler/11.0/066/bin/intel64/icc

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

SPECint_rate2006 = 117

NTT Tytan 2206I (Intel Xeon E5410)

SPECint_rate_base2006 = 112

CPU2006 license: 9013

Test date: Jan-2009

Test sponsor: NTT System S. A.

Hardware Availability: Dec-2008

Tested by: NTT System S. A.

Software Availability: Dec-2008

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-prefetch -ansi-alias

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3

429.mcf: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4

462.libquantum: -xSSE4.1 -ipo -O3 -no-prec-div -static
-opt-malloc-options=3 -parallel -par-runtime-control
-opt-prefetch

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmarheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmarheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

SPECint_rate2006 = 117

NTT Tytan 2206I (Intel Xeon E5410)

SPECint_rate_base2006 = 112

CPU2006 license: 9013

Test date: Jan-2009

Test sponsor: NTT System S. A.

Hardware Availability: Dec-2008

Tested by: NTT System S. A.

Software Availability: Dec-2008

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.01.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090710.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.01.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090710.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 01:42:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 April 2009.