



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R140a-4  
(Intel Xeon E7430)

SPECint®\_rate2006 = 192

SPECint\_rate\_base2006 = 179

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: Bull SAS

Test date: Feb-2009

Hardware Availability: Nov-2008

Software Availability: Nov-2008

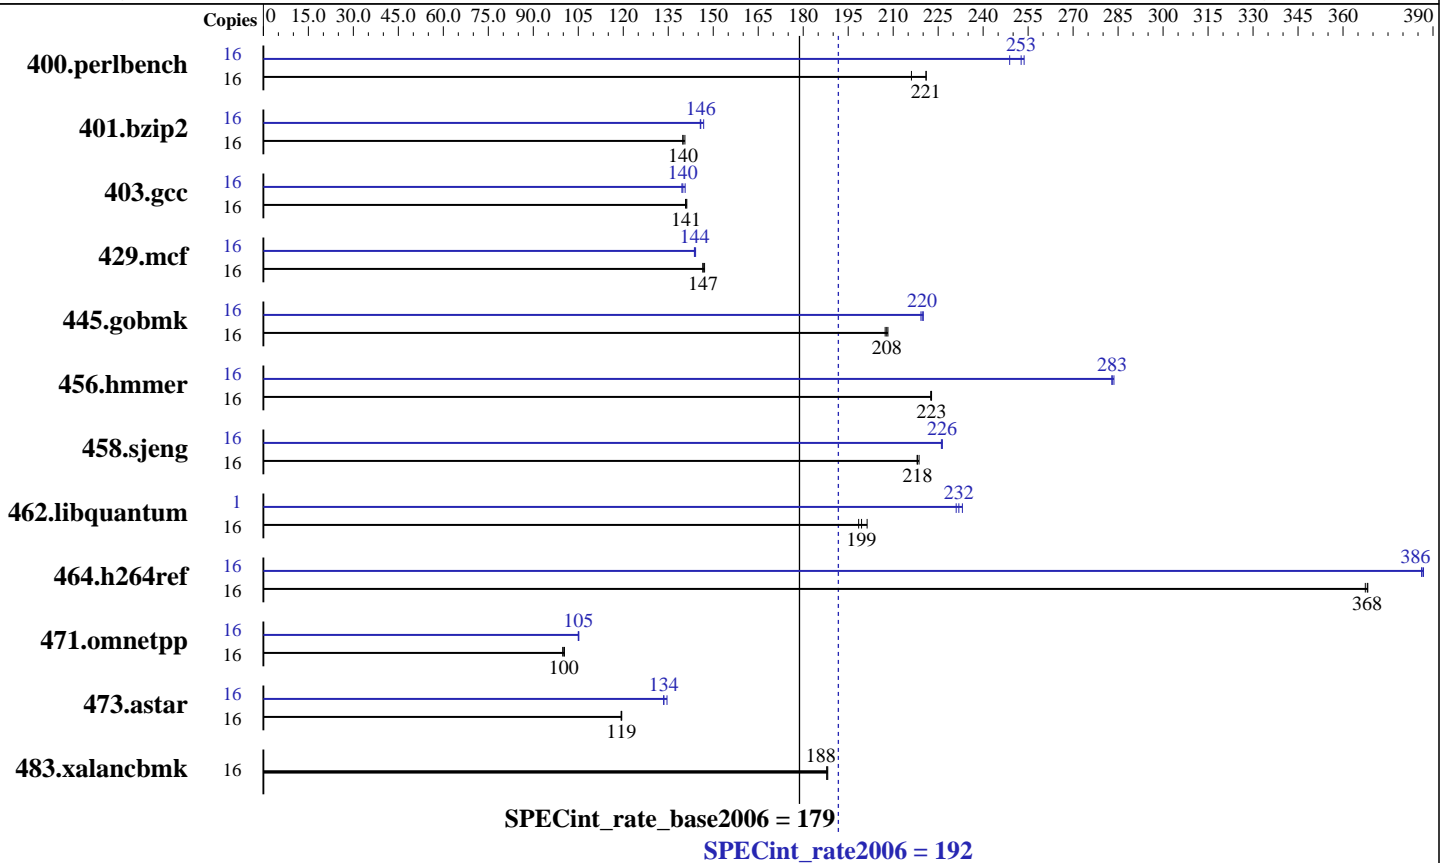

### Hardware

CPU Name: Intel Xeon E7430  
 CPU Characteristics: 1066 MHz system bus  
 CPU MHz: 2133  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip  
 CPU(s) orderable: 1,2,3,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 6 MB I+D on chip per chip, 3 MB shared / 2 cores  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 32 GB (16 x 2GB DDR2-667 FBDIMM)  
 Disk Subsystem: 1x146 GB SAS, 10000 RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2, Kernel 2.6.16.60-0.21-smp  
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20080730 Package ID: l\_cproc\_b\_11.0.042  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R140a-4  
(Intel Xeon E7430)

SPECint\_rate2006 = 192

SPECint\_rate\_base2006 = 179

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: Bull SAS

Test date: Feb-2009

Hardware Availability: Nov-2008

Software Availability: Nov-2008

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	707	221	723	216	<b>708</b>	<b>221</b>	16	<b>619</b>	<b>253</b>	628	249	616	254
401.bzip2	16	1099	141	<b>1103</b>	<b>140</b>	1104	140	16	<b>1059</b>	<b>146</b>	1052	147	1060	146
403.gcc	16	<b>914</b>	<b>141</b>	915	141	912	141	16	916	141	<b>921</b>	<b>140</b>	923	140
429.mcf	16	992	147	<b>995</b>	<b>147</b>	996	147	16	<b>1014</b>	<b>144</b>	1013	144	1015	144
445.gobmk	16	<b>808</b>	<b>208</b>	806	208	810	207	16	765	219	<b>764</b>	<b>220</b>	763	220
456.hammer	16	670	223	671	223	<b>670</b>	<b>223</b>	16	<b>527</b>	<b>283</b>	528	283	526	284
458.sjeng	16	<b>888</b>	<b>218</b>	886	219	888	218	16	856	226	<b>855</b>	<b>226</b>	855	226
462.libquantum	16	1647	201	<b>1662</b>	<b>199</b>	1670	198	1	<b>89.4</b>	<b>232</b>	89.7	231	88.9	233
464.h264ref	16	964	367	<b>962</b>	<b>368</b>	961	368	16	<b>916</b>	<b>386</b>	915	387	917	386
471.omnetpp	16	996	100	<b>998</b>	<b>100</b>	1002	99.8	16	951	105	<b>952</b>	<b>105</b>	953	105
473.astar	16	<b>941</b>	<b>119</b>	940	120	941	119	16	835	135	<b>841</b>	<b>134</b>	842	133
483.xalancbmk	16	587	188	<b>587</b>	<b>188</b>	588	188	16	587	188	<b>587</b>	<b>188</b>	588	188

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
taskset was used to bind processes to cores except  
for 462.libquantum peak

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to physical,0  
KMP\_STACKSIZE set to 64M

## Platform Notes

BIOS Settings:  
Adjacent Cache Line Prefetch = Disabled  
Hardware Prefetcher = Disabled

## General Notes

The NEC Express5800/R140a-4(Intel Xeon E7430) and  
the Bull NovaScale R480 E1(Intel Xeon E7430, 2.13 GHz) models are electronically equivalent.  
The results have been measured on a Bull NovaScale R480 E1(Intel Xeon E7430, 2.13 GHz) model.



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/R140a-4  
(Intel Xeon E7430)

**SPECint\_rate2006 = 192**

**SPECint\_rate\_base2006 = 179**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** Bull SAS

**Test date:** Feb-2009

**Hardware Availability:** Nov-2008

**Software Availability:** Nov-2008

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-alloc  
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/042/bin/intel64/icc  
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib  
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include

456.hmmer: /opt/intel/Compiler/11.0/042/bin/intel64/icc  
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib  
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/R140a-4  
(Intel Xeon E7430)

**SPECint\_rate2006 = 192**

**SPECint\_rate\_base2006 = 179**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** Bull SAS

**Test date:** Feb-2009

**Hardware Availability:** Nov-2008

**Software Availability:** Nov-2008

## Peak Compiler Invocation (Continued)

C++ benchmarks:  
icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -opt-prefetch -ansi-alias

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-alloc  
-opt-malloc-options=3

429.mcf: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo  
-no-prec-div -ansi-alias

456.hmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll4

462.libquantum: -xSSE4.1 -ipo -O3 -no-prec-div -static  
-opt-malloc-options=3 -parallel -par-runtime-control  
-opt-prefetch

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint\_rate2006 = 192

Express5800/R140a-4  
(Intel Xeon E7430)

SPECint\_rate\_base2006 = 179

CPU2006 license: 9006

Test date: Feb-2009

Test sponsor: NEC Corporation

Hardware Availability: Nov-2008

Tested by: Bull SAS

Software Availability: Nov-2008

## Peak Optimization Flags (Continued)

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -ansi-alias -opt-ra-region-strategy=block  
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine  
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.00.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.00.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 23:36:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 1 April 2009.

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>

Page 5