



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECint®2006 = 33.7**

Dell Precision T3500 (Intel Xeon X5570, 2.93 GHz)

**SPECint\_base2006 = 31.0**

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

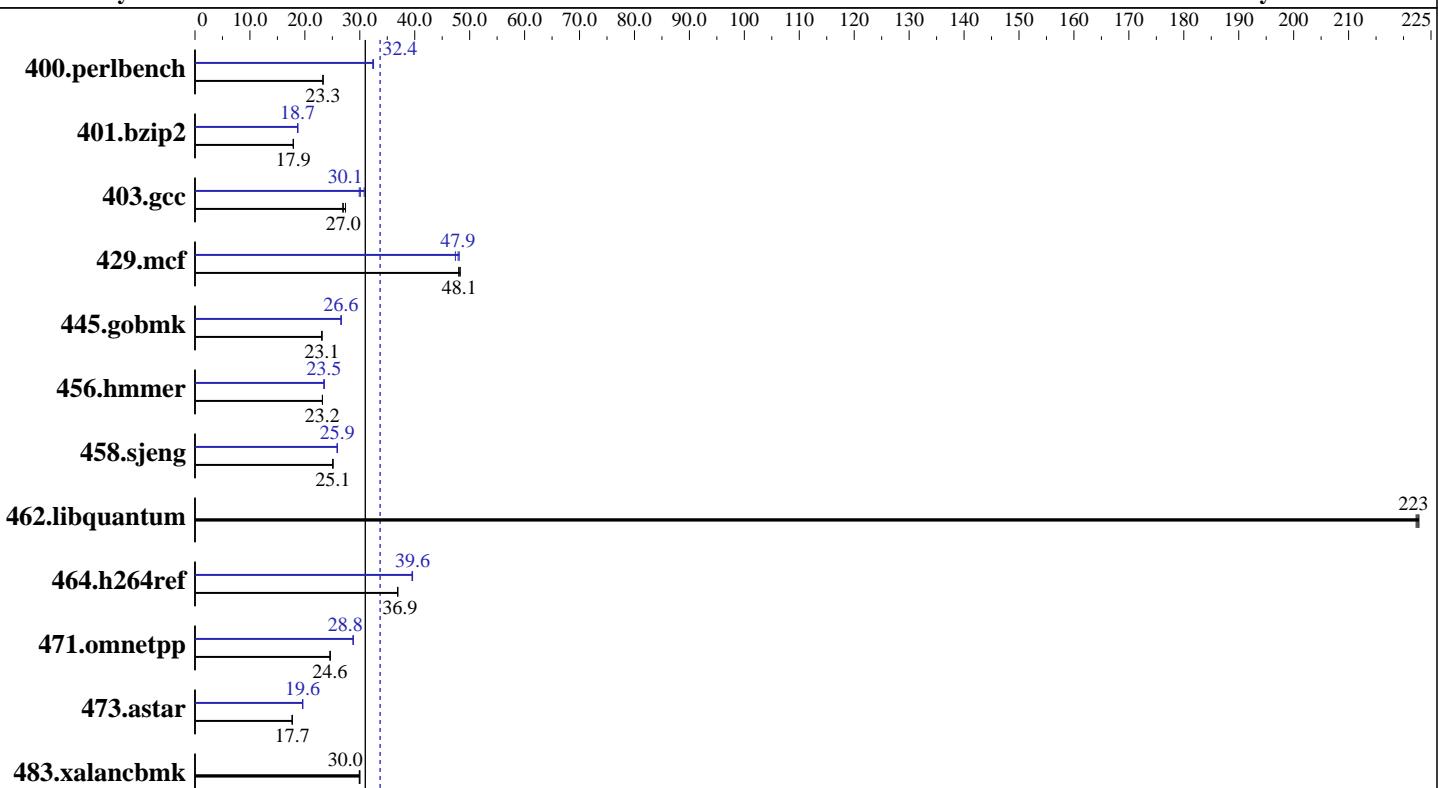

## Hardware

CPU Name: Intel Xeon X5570  
CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz  
CPU MHz: 2933  
FPU: Integrated  
CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
CPU(s) orderable: 1 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 12 GB (3x4 GB, DDR3\_1333R, ECC, CL9)  
Disk Subsystem: 1 x 80GB SATA 7200 RPM  
Other Hardware: None

## Software

Operating System: Windows Vista Ultimate SP1 (64-bit)  
Compiler: Intel C++ Compiler for IA-32, Version 11.0 Build 20090131 Package ID: w\_cproc\_p\_11.0.072 Microsoft Visual Studio 2008 SP1  
Auto Parallel: Yes  
File System: NTFS  
System State: Default  
Base Pointers: 32-bit  
Peak Pointers: 32-bit  
Other Software: MicroQuill SmartHeap Library 8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

Dell Precision T3500 (Intel Xeon X5570, 2.93 GHz)

**SPECint2006 = 33.7**

**SPECint\_base2006 = 31.0**

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<b>419</b>	<b>23.3</b>	420	23.3	419	23.3	<b>301</b>	<b>32.4</b>	301	32.5	301	32.4
401.bzip2	540	17.9	540	17.9	<b>540</b>	<b>17.9</b>	<b>517</b>	<b>18.7</b>	517	18.7	517	18.7
403.gcc	<b>298</b>	<b>27.0</b>	294	27.4	300	26.9	269	29.9	261	30.8	<b>268</b>	<b>30.1</b>
429.mcf	<b>190</b>	<b>48.1</b>	190	48.0	189	48.3	192	47.4	<b>190</b>	<b>47.9</b>	190	48.1
445.gobmk	454	23.1	454	23.1	<b>454</b>	<b>23.1</b>	<b>395</b>	<b>26.6</b>	395	26.6	395	26.6
456.hammer	403	23.2	402	23.2	<b>403</b>	<b>23.2</b>	397	23.5	397	23.5	<b>397</b>	<b>23.5</b>
458.sjeng	482	25.1	<b>482</b>	<b>25.1</b>	482	25.1	468	25.9	<b>468</b>	<b>25.9</b>	468	25.9
462.libquantum	<b>93.1</b>	<b>223</b>	93.0	223	93.2	222	<b>93.1</b>	<b>223</b>	93.0	223	93.2	222
464.h264ref	600	36.9	600	36.9	<b>600</b>	<b>36.9</b>	560	39.5	559	39.6	<b>560</b>	<b>39.6</b>
471.omnetpp	254	24.6	<b>254</b>	<b>24.6</b>	254	24.6	<b>217</b>	<b>28.8</b>	217	28.8	217	28.8
473.astar	397	17.7	397	17.7	<b>397</b>	<b>17.7</b>	358	19.6	<b>358</b>	<b>19.6</b>	358	19.6
483.xalancbmk	230	30.0	<b>230</b>	<b>30.0</b>	230	29.9	<b>230</b>	<b>30.0</b>	<b>230</b>	<b>30.0</b>	230	29.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Platform Notes

### BIOS Settings

Hyper-Threading Technology set to OFF.

## General Notes

Binaries were built on Windows Vista Business (64-bit)

## Base Compiler Invocation

C benchmarks:

icl -Qvc9 -Qstd=c99

C++ benchmarks:

icl -Qvc9

## Base Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32

464.h264ref: -DSPEC\_CPU\_NO\_INTTYPES -DWIN32

483.xalancbmk: -Qoption,cpp, --no\_wchar\_t\_keyword



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

Dell Precision T3500 (Intel Xeon X5570, 2.93 GHz)

**SPECint2006 = 33.7**

**SPECint\_base2006 = 31.0**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Mar-2009

**Hardware Availability:** Apr-2009

**Software Availability:** Feb-2009

## Base Optimization Flags

C benchmarks:

```
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel  
-Qpar-runtime-control -Qvec-guard-write /F512000000
```

C++ benchmarks:

```
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx_features  
/F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc9
```

## Peak Portability Flags

```
403.gcc: -DSPEC_CPU_WIN32  
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32  
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword
```

## Peak Optimization Flags

C benchmarks:

```
400.perlbench: -Qprof_gen(pass 1) -QxSSE4.2 -Qprof_use(pass 2) -Qipo -O3  
-Qprec-div- -Qansi-alias -Qopt-prefetch /F512000000  
shlw32m.lib  
-link /FORCE:MULTIPLE
```

```
401.bzip2: -Qprof_gen(pass 1) -QxSSE4.2(pass 2) -Qprof_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
/F512000000
```

```
403.gcc: -Qprof_gen(pass 1) -QxSSE4.2 -Qprof_use(pass 2) -Qipo -O3  
-Qprec-div- /F512000000
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECint2006 = 33.7**

Dell Precision T3500 (Intel Xeon X5570, 2.93 GHz)

**SPECint\_base2006 = 31.0**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Mar-2009

**Hardware Availability:** Apr-2009

**Software Availability:** Feb-2009

## Peak Optimization Flags (Continued)

429.mcf: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch  
/F512000000

445.gobmk: -Qprof\_gen(pass 1) -QxSSE4.2(pass 2) -Qprof\_use(pass 2)  
-Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmr: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qunroll12 -Qansi-alias  
/F512000000

458.sjeng: -Qprof\_gen(pass 1) -QxSSE4.2(pass 2) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qunroll14 /F512000000

462.libquantum: basepeak = yes

464.h264ref: -Qprof\_gen(pass 1) -QxSSE4.2(pass 2) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qunroll12 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: -Qprof\_gen(pass 1) -QxSSE4.2(pass 2) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qansi-alias  
-Qopt-ra-region-strategy=block /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE

473.astar: -Qprof\_gen(pass 1) -QxSSE4.2(pass 2) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qansi-alias  
-Qopt-ra-region-strategy=routine /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/dell.ic11.0.windows.flags.20090710.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/dell.ic11.0.windows.flags.20090710.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

Dell Precision T3500 (Intel Xeon X5570, 2.93 GHz)

**SPECint2006 = 33.7**

**SPECint\_base2006 = 31.0**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Mar-2009

**Hardware Availability:** Apr-2009

**Software Availability:** Feb-2009

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 00:00:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 April 2009.