



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

### SPECint®\_rate2006 = 199

PRIMERGY RX200 S5, Intel Xeon L5520, 2.26 GHz

### SPECint\_rate\_base2006 = 184

CPU2006 license: 19


Test date: Mar-2009

Test sponsor: Fujitsu

Hardware Availability: Apr-2009

Tested by: Fujitsu

Software Availability: Feb-2009

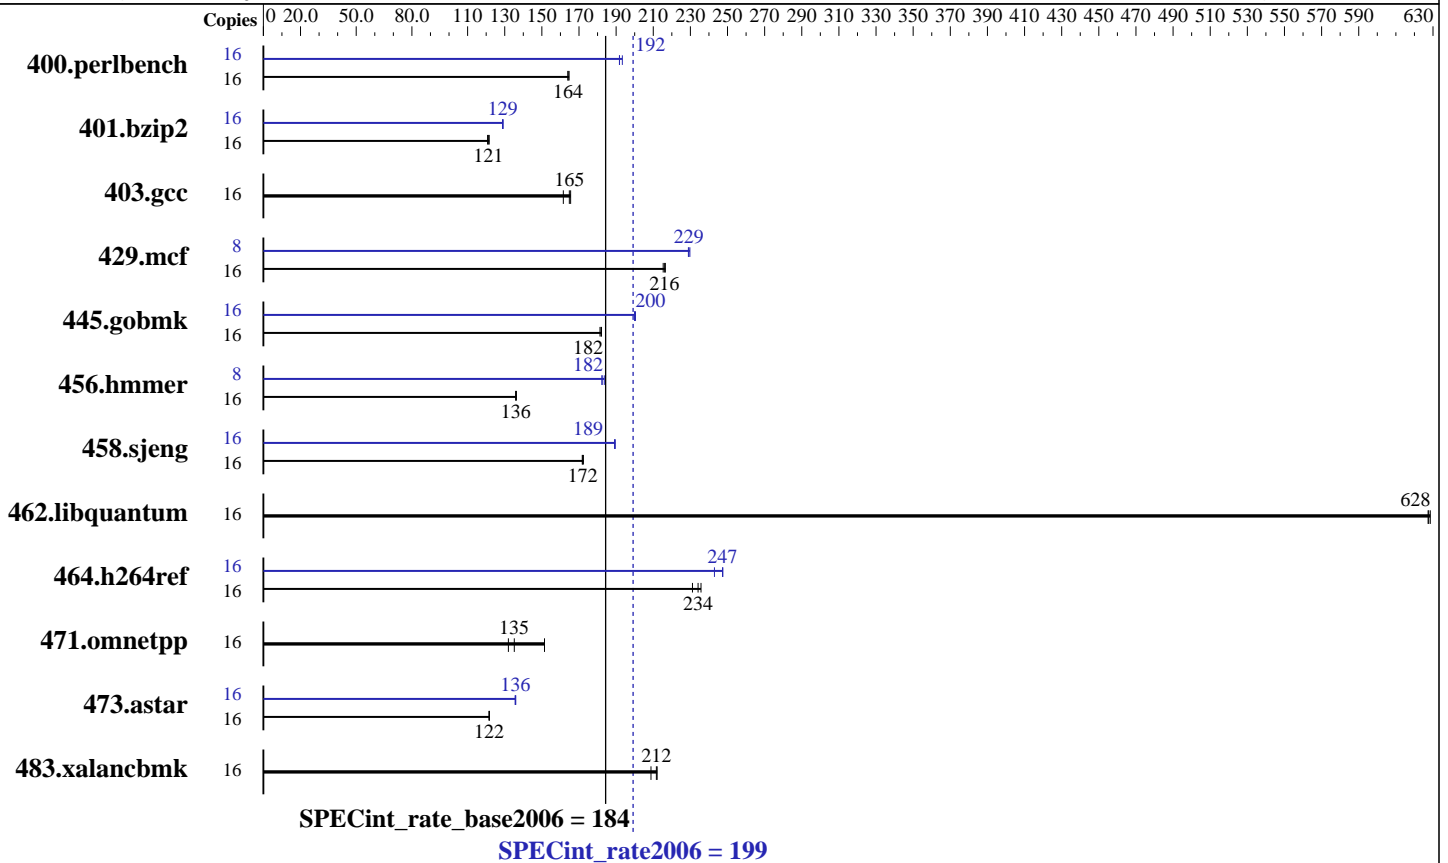

### Hardware

CPU Name: Intel Xeon L5520  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.53 GHz  
 CPU MHz: 2267  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12x4 GB PC3-8500R, 2 rank, CL7-7-7, ECC)  
 Disk Subsystem: 1 x SATA, 250 GB, 7200 RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2, Kernel 2.6.16.60-0.21-smp  
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20090131 Package ID: l\_cproc\_p\_11.0.080  
 Auto Parallel: No  
 File System: ext3  
 System State: Multi-User Run Level 3  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECint\_rate2006 = 199

PRIMERGY RX200 S5, Intel Xeon L5520, 2.26 GHz

SPECint\_rate\_base2006 = 184

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Mar-2009  
Hardware Availability: Apr-2009  
Software Availability: Feb-2009

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	949	165	953	164	<u>953</u>	<u>164</u>	16	808	193	815	192	<u>815</u>	<u>192</u>
401.bzip2	16	1269	122	1279	121	<u>1274</u>	<u>121</u>	16	<u>1197</u>	<u>129</u>	1196	129	1199	129
403.gcc	16	<u>782</u>	<u>165</u>	797	162	778	165	16	<u>782</u>	<u>165</u>	797	162	778	165
429.mcf	16	<u>675</u>	<u>216</u>	678	215	674	217	8	318	230	<u>318</u>	<u>229</u>	319	229
445.gobmk	16	926	181	<u>923</u>	<u>182</u>	922	182	16	840	200	<u>839</u>	<u>200</u>	837	200
456.hammer	16	<u>1098</u>	<u>136</u>	1095	136	1098	136	8	409	182	406	184	<u>409</u>	<u>182</u>
458.sjeng	16	1127	172	1123	172	<u>1126</u>	<u>172</u>	16	<u>1023</u>	<u>189</u>	1022	189	1023	189
462.libquantum	16	<u>528</u>	<u>628</u>	527	629	528	627	16	<u>528</u>	<u>628</u>	527	629	528	627
464.h264ref	16	<u>1512</u>	<u>234</u>	1502	236	1532	231	16	1431	247	1457	243	<u>1432</u>	<u>247</u>
471.omnetpp	16	660	151	<u>740</u>	<u>135</u>	758	132	16	660	151	<u>740</u>	<u>135</u>	758	132
473.astar	16	<u>923</u>	<u>122</u>	923	122	924	122	16	826	136	828	136	<u>827</u>	<u>136</u>
483.xalanbmk	16	521	212	529	209	<u>522</u>	<u>212</u>	16	521	212	529	209	<u>522</u>	<u>212</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## General Notes

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalanbmk: -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint\_rate2006 = 199**

PRIMERGY RX200 S5, Intel Xeon L5520, 2.26 GHz

**SPECint\_rate\_base2006 = 184**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Mar-2009

**Hardware Availability:** Apr-2009

**Software Availability:** Feb-2009

## Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3 -opt-prefetch`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap`

## Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc`

`401.bzip2: /opt/intel/Compiler/11.0/080/bin/intel64/icc`

`456.hmmer: /opt/intel/Compiler/11.0/080/bin/intel64/icc`

`458.sjeng: /opt/intel/Compiler/11.0/080/bin/intel64/icc`

C++ benchmarks (except as noted below):

`icpc`

`473.astar: /opt/intel/Compiler/11.0/080/bin/intel64/icpc`

## Peak Portability Flags

`400.perlbench: -DSPEC_CPU_LINUX_IA32`

`401.bzip2: -DSPEC_CPU_LP64`

`456.hmmer: -DSPEC_CPU_LP64`

`458.sjeng: -DSPEC_CPU_LP64`

`462.libquantum: -DSPEC_CPU_LINUX`

`473.astar: -DSPEC_CPU_LP64`

`483.xalancbmk: -DSPEC_CPU_LINUX`



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint\_rate2006 = 199

PRIMERGY RX200 S5, Intel Xeon L5520, 2.26 GHz

SPECint\_rate\_base2006 = 184

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: basepeak = yes

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
-ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=routine -auto-ilp32  
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint\_rate2006 = 199

PRIMERGY RX200 S5, Intel Xeon L5520, 2.26 GHz

SPECint\_rate\_base2006 = 184

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

## Peak Other Flags (Continued)

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.02.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.02.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 00:48:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 23 April 2009.