



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

**SPECint®2006 = 36.0**

ASUS Z8NA-D6 server motherboard (Intel Xeon X5570)

**SPECint\_base2006 = 32.0**

CPU2006 license: 9016


Test date: Mar-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2009

Tested by: ASUSTeK Computer Inc.

Software Availability: Feb-2009

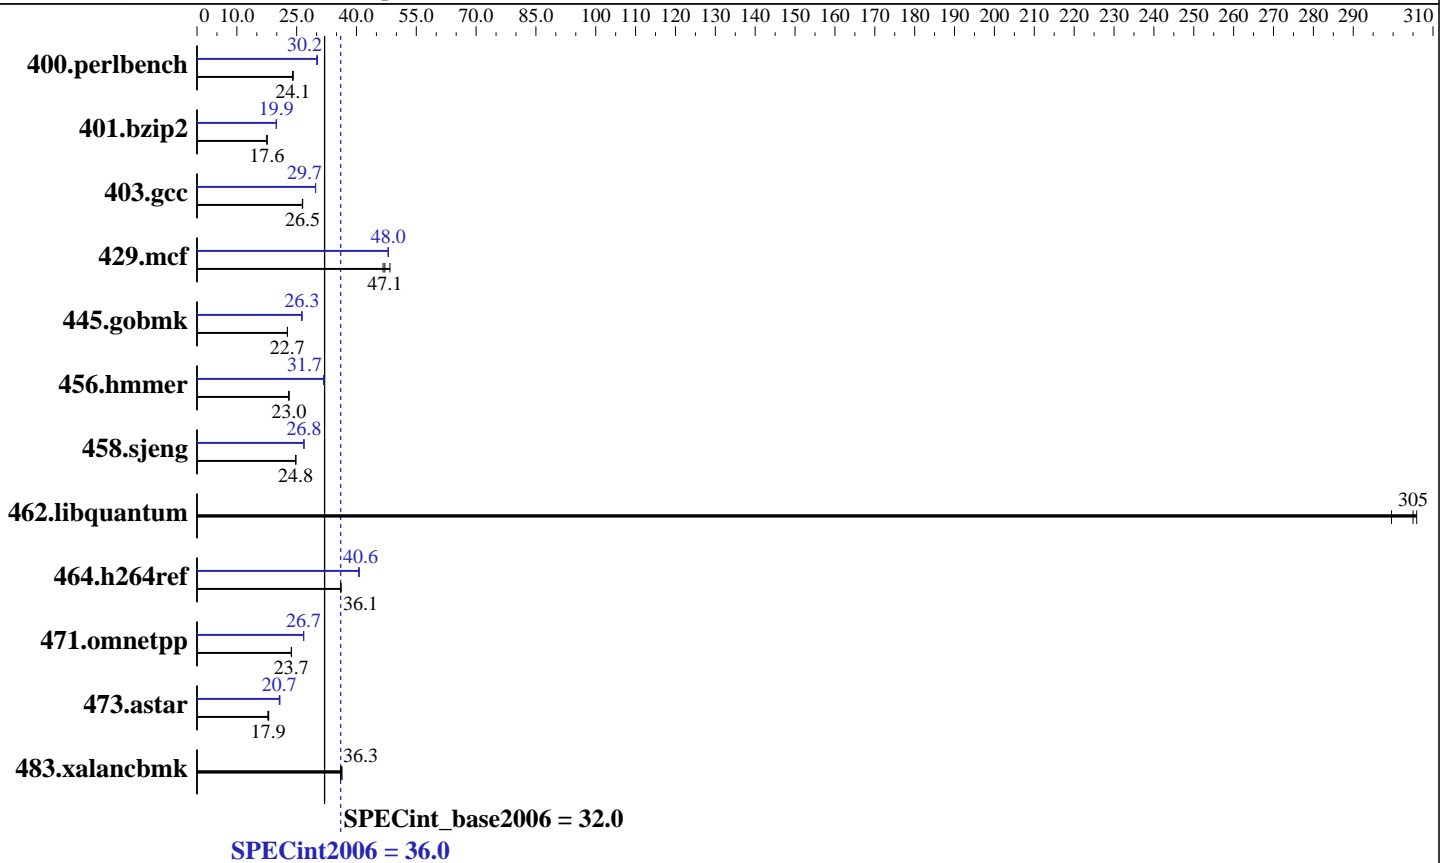

### Hardware

CPU Name: Intel Xeon X5570  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz  
 CPU MHz: 2933  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 24 GB (6 X 4 GB PC3-10600R, CL=9)  
 Disk Subsystem: Seagate ST3500830AS 500GB SATAII, 7200RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2  
 Kernel 2.6.16.60-0.34-smp  
 Compiler: Intel C++ Compiler Professional 11.0 for Linux  
 Build 20090131 Package ID: l\_cproc\_p\_11.0.080  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1  
 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint2006 = 36.0

ASUS Z8NA-D6 server motherboard (Intel Xeon X5570)

SPECint\_base2006 = 32.0

CPU2006 license: 9016

Test date: Mar-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2009

Tested by: ASUSTeK Computer Inc.

Software Availability: Feb-2009

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<b>406</b>	<b>24.1</b>	407	24.0	406	24.1	323	30.2	326	30.0	<b>324</b>	<b>30.2</b>
401.bzip2	551	17.5	<b>550</b>	<b>17.6</b>	549	17.6	485	19.9	484	19.9	<b>485</b>	<b>19.9</b>
403.gcc	305	26.4	304	26.5	<b>304</b>	<b>26.5</b>	<b>271</b>	<b>29.7</b>	271	29.7	271	29.7
429.mcf	195	46.7	<b>194</b>	<b>47.1</b>	188	48.4	190	47.9	190	48.0	<b>190</b>	<b>48.0</b>
445.gobmk	462	22.7	<b>462</b>	<b>22.7</b>	462	22.7	399	26.3	<b>399</b>	<b>26.3</b>	398	26.3
456.hammer	<b>405</b>	<b>23.0</b>	404	23.1	405	23.0	294	31.7	293	31.9	<b>294</b>	<b>31.7</b>
458.sjeng	489	24.7	<b>488</b>	<b>24.8</b>	488	24.8	451	26.8	<b>451</b>	<b>26.8</b>	451	26.8
462.libquantum	69.2	300	<b>67.9</b>	<b>305</b>	67.7	306	69.2	300	<b>67.9</b>	<b>305</b>	67.7	306
464.h264ref	<b>614</b>	<b>36.1</b>	614	36.1	613	36.1	<b>545</b>	<b>40.6</b>	545	40.6	544	40.7
471.omnetpp	264	23.7	264	23.7	<b>264</b>	<b>23.7</b>	234	26.8	234	26.7	<b>234</b>	<b>26.7</b>
473.astar	395	17.8	390	18.0	<b>392</b>	<b>17.9</b>	<b>340</b>	<b>20.7</b>	337	20.8	340	20.6
483.xalancbmk	190	36.3	<b>190</b>	<b>36.3</b>	192	36.0	190	36.3	<b>190</b>	<b>36.3</b>	192	36.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to granularity=fine,scatter

## Platform Notes

BIOS setting:  
Hardware Prefetcher: Enabled  
Adjacent Cache Line Prefetch: Enabled  
Tested system compliance with Intel ATX spec  
450W or higher ATX Power Supply (dual 12V/18A output), 500W or higher SSI Server Power Supply  
System was configured with ASPEED AST2050 VGA (on board VGA)

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint2006 = 36.0

ASUS Z8NA-D6 server motherboard (Intel Xeon X5570)

SPECint\_base2006 = 32.0

CPU2006 license: 9016

Test date: Mar-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2009

Tested by: ASUSTeK Computer Inc.

Software Availability: Feb-2009

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel  
-par-runtime-control -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/080/bin/intel64/icc

456.hmmer: /opt/intel/Compiler/11.0/080/bin/intel64/icc

458.sjeng: /opt/intel/Compiler/11.0/080/bin/intel64/icc

C++ benchmarks (except as noted below):

icpc

473.astar: /opt/intel/Compiler/11.0/080/bin/intel64/icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint2006 = 36.0

ASUS Z8NA-D6 server motherboard (Intel Xeon X5570)

SPECint\_base2006 = 32.0

CPU2006 license: 9016

Test date: Mar-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2009

Tested by: ASUSTeK Computer Inc.

Software Availability: Feb-2009

## Peak Portability Flags (Continued)

458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -ansi-alias -opt-prefetch  
401.bzp2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias  
403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3  
429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
-ipo -no-prec-div -ansi-alias  
456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias -auto-ilp32  
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll4 -auto-ilp32  
462.libquantum: basepeak = yes  
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap  
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=routine -auto-ilp32  
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint2006 = 36.0

ASUS Z8NA-D6 server motherboard (Intel Xeon X5570)

SPECint\_base2006 = 32.0

CPU2006 license: 9016

Test date: Mar-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2009

Tested by: ASUSTeK Computer Inc.

Software Availability: Feb-2009

## Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.02.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.02.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 00:58:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 15 April 2009.