



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B140a-T
(Intel Xeon E7220)

SPECfp[®]_rate2006 = 70.9

SPECfp_rate_base2006 = 68.0

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Apr-2009

Hardware Availability: Feb-2009

Software Availability: Nov-2008

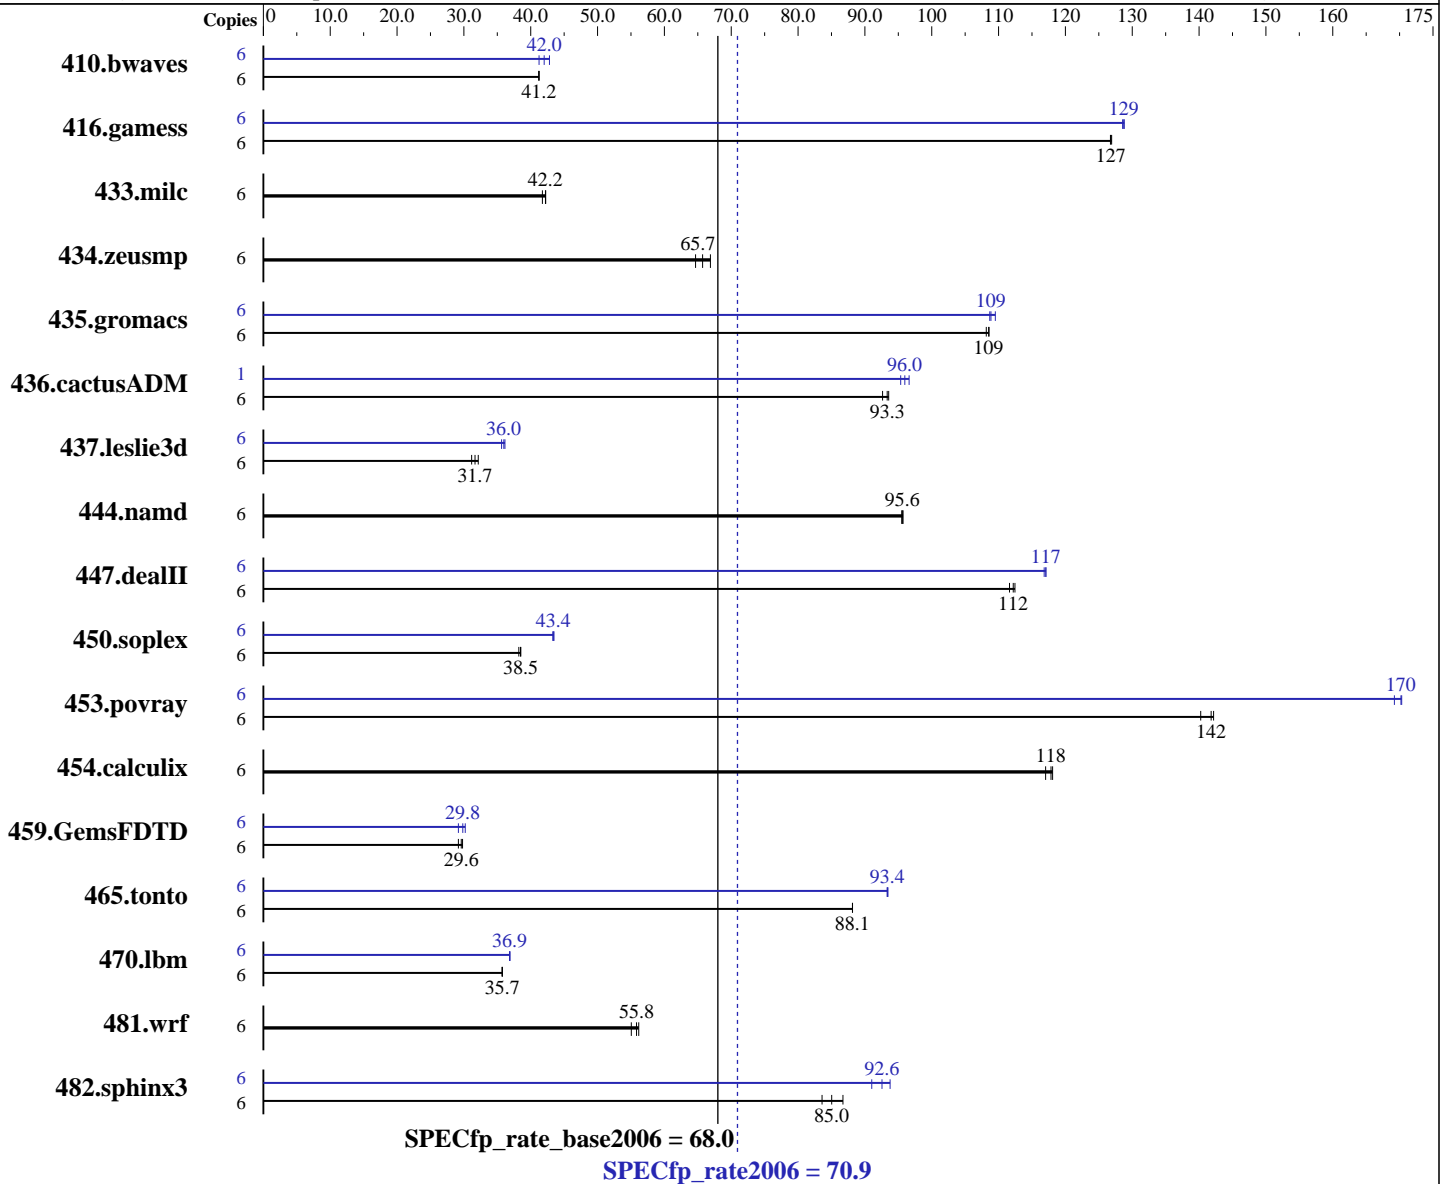

Hardware

CPU Name: Intel Xeon E7220
 CPU Characteristics: 1066 MHz system bus
 CPU MHz: 2933
 FPU: Integrated
 CPU(s) enabled: 6 cores, 3 chips, 2 cores/chip
 CPU(s) orderable: 1,2,3,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smpp
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20081105 Package ID: l_cproc_p_11.0.074, l_cprof_p_11.0.074
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B140a-T
(Intel Xeon E7220)

SPECfp_rate2006 = 70.9

SPECfp_rate_base2006 = 68.0

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Apr-2009
Hardware Availability: Feb-2009
Software Availability: Nov-2008

L3 Cache: None
Other Cache: None
Memory: 32 GB (16x2 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem: 1x146.5 GB SAS, 10000 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	6	1977	41.2	1978	41.2	1978	41.2	6	1977	41.2	1905	42.8	1941	42.0
416.gamess	6	926	127	927	127	926	127	6	914	129	913	129	912	129
433.milc	6	1319	41.7	1304	42.2	1305	42.2	6	1319	41.7	1304	42.2	1305	42.2
434.zeusmp	6	844	64.7	816	66.9	831	65.7	6	844	64.7	816	66.9	831	65.7
435.gromacs	6	395	109	396	108	395	109	6	394	109	391	110	394	109
436.cactusADM	6	766	93.6	768	93.3	774	92.6	1	124	96.6	125	95.4	125	96.0
437.leslie3d	6	1781	31.7	1810	31.2	1754	32.1	6	1568	36.0	1560	36.1	1582	35.6
444.namd	6	503	95.6	504	95.5	503	95.7	6	503	95.6	504	95.5	503	95.7
447.dealII	6	612	112	610	112	615	112	6	588	117	586	117	586	117
450.soplex	6	1299	38.5	1301	38.5	1309	38.2	6	1156	43.3	1153	43.4	1151	43.5
453.povray	6	225	142	225	142	228	140	6	188	170	189	169	187	170
454.calculix	6	420	118	423	117	419	118	6	420	118	423	117	419	118
459.GemsFDTD	6	2150	29.6	2182	29.2	2136	29.8	6	2182	29.2	2134	29.8	2108	30.2
465.tonto	6	670	88.2	670	88.1	670	88.1	6	632	93.5	633	93.3	632	93.4
470.lbm	6	2308	35.7	2306	35.8	2306	35.7	6	2239	36.8	2237	36.9	2234	36.9
481.wrf	6	1217	55.0	1193	56.2	1200	55.8	6	1217	55.0	1193	56.2	1200	55.8
482.sphinx3	6	1375	85.0	1399	83.6	1349	86.7	6	1285	91.0	1263	92.6	1247	93.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
taskset was used to bind processes to cores except
for 436.cactusADM peak

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 64M



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B140a-T
(Intel Xeon E7220)

SPECfp_rate2006 = 70.9

SPECfp_rate_base2006 = 68.0

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Apr-2009
Hardware Availability: Feb-2009
Software Availability: Nov-2008

Platform Notes

Bios settings:
Hardware Prefetcher: Disabled
Adjacent Cache Line Prefetch: Disabled
FSB High Bandwidth Optimization: Disabled

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:
-xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B140a-T
(Intel Xeon E7220)

SPECfp_rate2006 = 70.9

SPECfp_rate_base2006 = 68.0

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Apr-2009

Hardware Availability: Feb-2009

Software Availability: Nov-2008

Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: /opt/intel/Compiler/11.0/074/bin/ia32/icc
-L/opt/intel/Compiler/11.0/074/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/074/ipp/ia32/include

C++ benchmarks (except as noted below):

icpc

450.soplex: /opt/intel/Compiler/11.0/074/bin/ia32/icpc
-L/opt/intel/Compiler/11.0/074/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/074/ipp/ia32/include

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: /opt/intel/Compiler/11.0/074/bin/ia32/ifort
-L/opt/intel/Compiler/11.0/074/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/074/ipp/ia32/include

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B140a-T
(Intel Xeon E7220)

SPECfp_rate2006 = 70.9

SPECfp_rate_base2006 = 68.0

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Apr-2009

Hardware Availability: Feb-2009

Software Availability: Nov-2008

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch
-auto-ilp32

482.sphinx3: -xSSSE3 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -ansi-alias
-scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -opt-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll4 -auto

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B140a-T
(Intel Xeon E7220)

SPECfp_rate2006 = 70.9

SPECfp_rate_base2006 = 68.0

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Apr-2009

Hardware Availability: Feb-2009

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll2 -opt-prefetch -parallel
-auto-ilp32

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revG.html>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revG.xml>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 00:55:12 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 May 2009.