



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sun Microsystems

### SPECfp<sup>®</sup>\_rate2006 = 196

### Sun Fire X2270 (Intel Xeon X5570 2.93GHz)

### SPECfp\_rate\_base2006 = 181

CPU2006 license: 6


Test date: Mar-2009

Test sponsor: Sun Microsystems

Hardware Availability: Apr-2009

Tested by: Sun Microsystems

Software Availability: Jun-2009

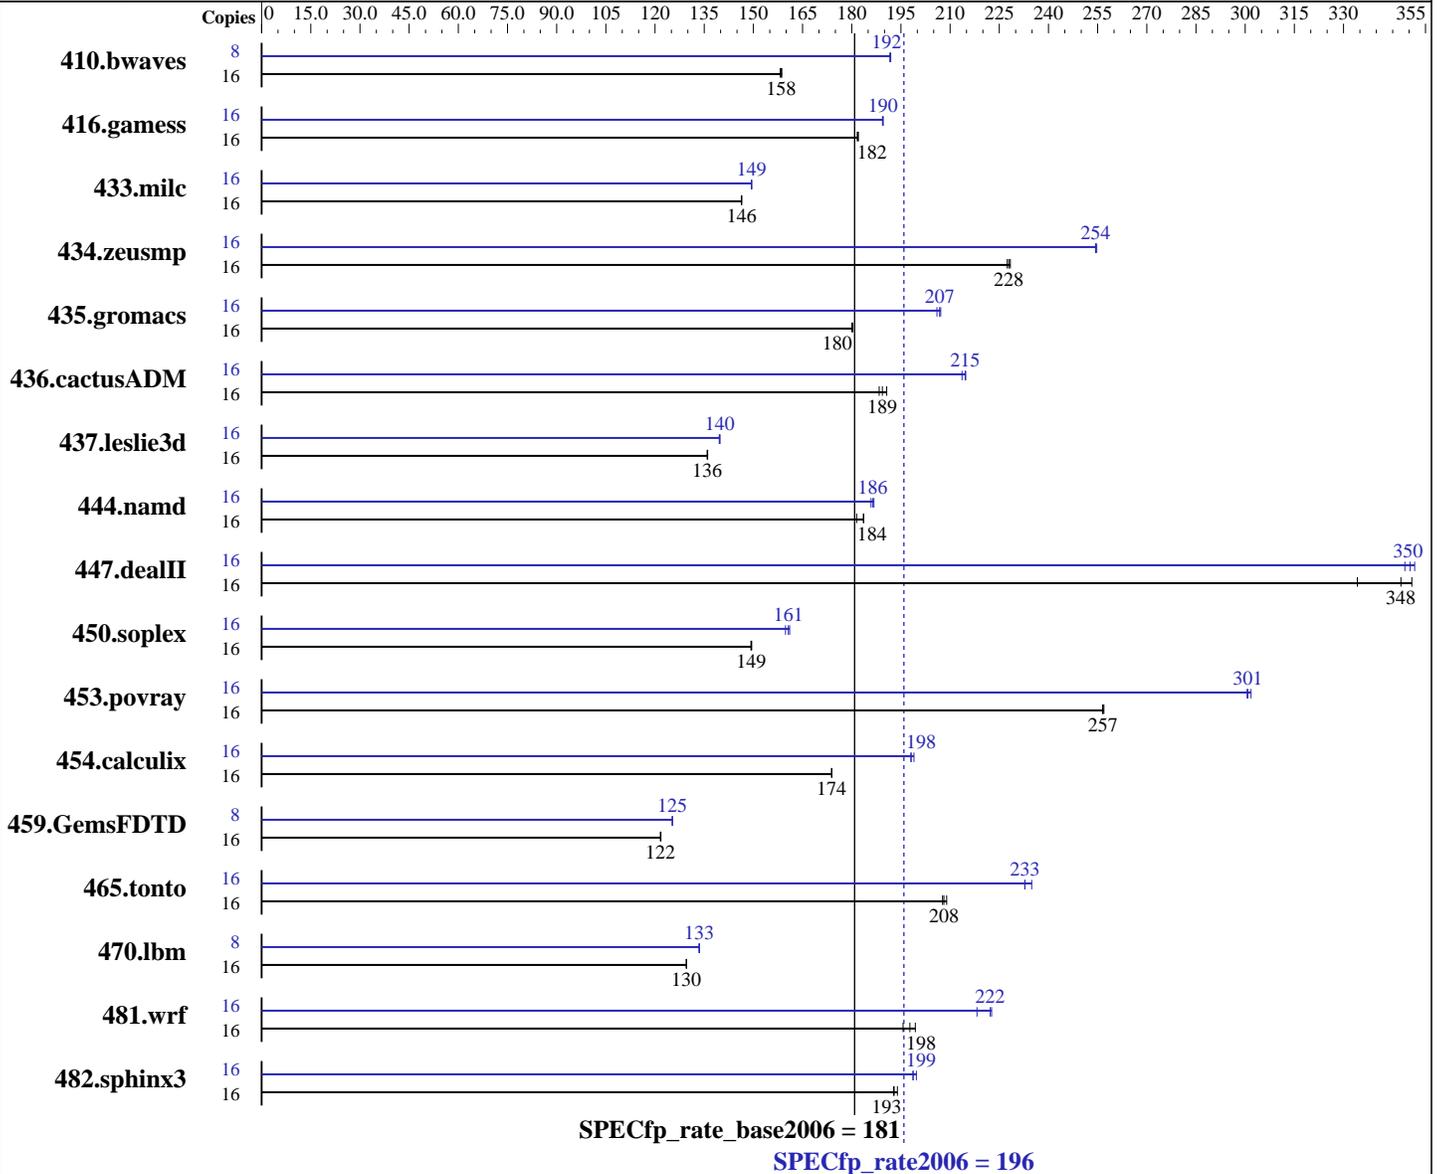

#### Hardware

CPU Name: Intel Xeon X5570  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz  
 CPU MHz: 2933  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 or 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

#### Software

Operating System: OpenSolaris 2008.11  
 Compiler: Sun Studio 12 Update 1 (backend build 20090309)  
 Auto Parallel: No  
 File System: zfs with gzip compression  
 System State: Default  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sun Microsystems

SPECfp\_rate2006 = 196

Sun Fire X2270 (Intel Xeon X5570 2.93GHz)

SPECfp\_rate\_base2006 = 181

CPU2006 license: 6

Test date: Mar-2009

Test sponsor: Sun Microsystems

Hardware Availability: Apr-2009

Tested by: Sun Microsystems

Software Availability: Jun-2009

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 24 GB (6 x 4 GB DDR3-1333)  
Disk Subsystem: 1 x 1 TB, SATA, 7200 RPM  
Other Hardware: None

Other Software: MicroQuill SmartHeap Library 9.01 for x64  
Apache C++ Standard Library V4.2.1

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1370	159	<u>1372</u>	<u>158</u>	1375	158	8	<u>567</u>	<u>192</u>	567	192	567	192
416.gamess	16	1725	182	1721	182	<u>1722</u>	<u>182</u>	16	1653	190	1654	189	<u>1653</u>	<u>190</u>
433.milc	16	1004	146	<u>1003</u>	<u>146</u>	1003	146	16	<u>983</u>	<u>149</u>	983	149	982	150
434.zeusmp	16	640	227	<u>639</u>	<u>228</u>	638	228	16	572	255	572	254	<u>572</u>	<u>254</u>
435.gromacs	16	634	180	634	180	<u>634</u>	<u>180</u>	16	<u>552</u>	<u>207</u>	552	207	555	206
436.cactusADM	16	1015	188	<u>1010</u>	<u>189</u>	1003	191	16	895	214	890	215	<u>891</u>	<u>215</u>
437.leslie3d	16	1107	136	<u>1106</u>	<u>136</u>	1105	136	16	1077	140	1076	140	<u>1076</u>	<u>140</u>
444.namd	16	<u>699</u>	<u>184</u>	699	184	707	182	16	<u>688</u>	<u>186</u>	690	186	687	187
447.dealII	16	548	334	522	351	<u>527</u>	<u>348</u>	16	525	349	<u>522</u>	<u>350</u>	520	352
450.soplex	16	893	149	<u>893</u>	<u>149</u>	894	149	16	<u>831</u>	<u>161</u>	835	160	829	161
453.povray	16	<u>332</u>	<u>257</u>	331	257	332	257	16	<u>283</u>	<u>301</u>	282	302	283	301
454.calculix	16	759	174	<u>759</u>	<u>174</u>	759	174	16	663	199	667	198	<u>666</u>	<u>198</u>
459.GemsFDTD	16	<u>1395</u>	<u>122</u>	1395	122	1394	122	8	<u>677</u>	<u>125</u>	677	125	678	125
465.tonto	16	753	209	<u>757</u>	<u>208</u>	758	208	16	670	235	<u>676</u>	<u>233</u>	676	233
470.lbm	16	1697	130	<u>1697</u>	<u>130</u>	1696	130	8	823	134	<u>824</u>	<u>133</u>	824	133
481.wrf	16	913	196	896	199	<u>904</u>	<u>198</u>	16	803	223	819	218	<u>804</u>	<u>222</u>
482.sphinx3	16	1618	193	<u>1616</u>	<u>193</u>	1608	194	16	<u>1569</u>	<u>199</u>	1561	200	1570	199

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

The Apache C++ Standard Library V4.2.1 was installed from <http://stdcxx.apache.org/download.html> using:  
alias gmake=specmake  
gmake BUILDTYPE=8D CONFIG=sunpro.config

## Submit Notes

The config file option 'submit' was used, along with 'pbind', to assign processes to cores.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp\_rate2006 = 196

Sun Fire X2270 (Intel Xeon X5570 2.93GHz)

SPECfp\_rate\_base2006 = 181

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Mar-2009

Hardware Availability: Apr-2009

Software Availability: Jun-2009

## Operating System Notes

```
ulimit -s 131072 (shell): increases stack
```

```
/etc/system parameters
tune_t_fsflushr=10
autoup=900
set lpg_alloc_prefer=1
set zfs:zfs_arc_max = 0x10000000
```

## Platform Notes

Default BIOS settings used except:  
Intel VT-d: Disabled. VT-d, if enabled, supports remapping of I/O DMA transfers for virtualization.

## General Notes

447.dealII (peak): "apache\_stdccxx\_4\_2\_1" src.alt was used.

447.dealII (base): "apache\_stdccxx\_4\_2\_1" src.alt was used.

## Base Compiler Invocation

C benchmarks:

```
/data1/20090309_ceres_x86/bin/cc
```

C++ benchmarks:

```
/data1/20090309_ceres_x86/bin/CC
```

Fortran benchmarks:

```
/data1/20090309_ceres_x86/bin/f90
```

Benchmarks using both Fortran and C:

```
/data1/20090309_ceres_x86/bin/cc /data1/20090309_ceres_x86/bin/f90
```

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64
437.leslie3d: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp\_rate2006 = 196

Sun Fire X2270 (Intel Xeon X5570 2.93GHz)

SPECfp\_rate\_base2006 = 181

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Mar-2009

Hardware Availability: Apr-2009

Software Availability: Jun-2009

## Base Portability Flags (Continued)

```
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_WORDS_LITTLEENDIAN
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-fast -xipo=2 -m64 -xpagesize=2M -xalias_level=std
```

C++ benchmarks:

```
-fast -xipo=2 -m64 -xpagesize=2M -xalias_level=compatible
-library=no%Cstd -I/data2c/stdcxx-4.2.1/include
-I/data2c/stdcxx-4.2.1/build/include -L/data2c/stdcxx-4.2.1/build/lib
-R/data2c/stdcxx-4.2.1/build/lib -lstd8D
```

Fortran benchmarks:

```
-fast -xipo=2 -m64 -xpagesize=2M
```

Benchmarks using both Fortran and C:

```
-fast(cc) -xipo=2 -m64 -xpagesize=2M -xalias_level=std -fast(f90)
```

## Base Other Flags

C benchmarks:

```
-V -# -xjobs=16
```

C++ benchmarks:

```
-verbose=diags,version -xjobs=16
```

Fortran benchmarks:

```
-V -v -xjobs=16
```

Benchmarks using both Fortran and C:

```
-V -# -xjobs=16 -v
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp\_rate2006 = 196

Sun Fire X2270 (Intel Xeon X5570 2.93GHz)

SPECfp\_rate\_base2006 = 181

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Mar-2009

Hardware Availability: Apr-2009

Software Availability: Jun-2009

## Peak Compiler Invocation

C benchmarks:

/data1/20090309\_ceres\_x86/bin/cc

C++ benchmarks:

/data1/20090309\_ceres\_x86/bin/CC

Fortran benchmarks:

/data1/20090309\_ceres\_x86/bin/f90

Benchmarks using both Fortran and C:

/data1/20090309\_ceres\_x86/bin/cc /data1/20090309\_ceres\_x86/bin/f90

## Peak Portability Flags

436.cactusADM: -DSPEC\_CPU\_LP64

481.wrf: -DSPEC\_CPU\_WORDS\_LITTLEENDIAN

## Peak Optimization Flags

C benchmarks:

433.milc: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xipo=2  
-xpagesize=2M

470.lbm: -fast -xipo=2 -m64 -xvector=simd -lbsdmalloc

482.sphinx3: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xipo=2  
-xpagesize=2M -xalias\_level=std -xunroll=6  
-W2,-Aujam:notinners -lumem -lmvec

C++ benchmarks:

444.namd: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64  
-xpagesize=2M -xunroll=8 -library=stlport4

447.dealIII: -fast -xipo=2 -m64 -xpagesize=2M -xalias\_level=compatible  
-xdepend -library=no%Cstd -I/data2c/stdcxx-4.2.1/include  
-I/data2c/stdcxx-4.2.1/build/include -xvector -xprefetch  
-L/data2c/stdcxx-4.2.1/build/lib  
-R/data2c/stdcxx-4.2.1/build/lib -lstd8D

450.soplex: -fast -xipo=2 -xpagesize=2M -xrestrict  
-xalias\_level=simple -xvector=simd -library=stlport4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp\_rate2006 = 196

Sun Fire X2270 (Intel Xeon X5570 2.93GHz)

SPECfp\_rate\_base2006 = 181

CPU2006 license: 6

Test date: Mar-2009

Test sponsor: Sun Microsystems

Hardware Availability: Apr-2009

Tested by: Sun Microsystems

Software Availability: Jun-2009

## Peak Optimization Flags (Continued)

453.povray: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64  
-xpagesize=2M -xalias\_level=compatible -library=stlport4

Fortran benchmarks:

410.bwaves: -fast -xipo=2 -m64 -xpagesize=2M

416.gamess: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64  
-xpagesize=2M -xunroll=1 -qoption iropt -Ainline:cp=19  
-qoption iropt -Ainline:rs=50 -qoption iropt -Ainline:irs=30

434.zeusmp: -fast -m64 -xpagesize=2M -xvector=simd

437.leslie3d: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64  
-xvector=simd -lumem

459.GemsFDTD: -fast -xipo=2 -m64 -xpagesize=2M -xvector=simd

465.tonto: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64  
-xpagesize=2M -xvector=lib -xalias -xdepend -lbsdmalloc

Benchmarks using both Fortran and C:

435.gromacs: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)  
-xipo=2 -m64 -xpagesize=2M -fsimple=2  
-Qoption ube -fsimple=3

436.cactusADM: -fast(cc) -fast(f90) -xipo=2 -m64 -xpagesize=2M  
-xvector=simd

454.calculix: Same as 436.cactusADM

481.wrf: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)  
-xipo=2 -m64 -xvector=simd

## Peak Other Flags

C benchmarks:

-V -# -xjobs=16

C++ benchmarks:

-verbose=diags,version -xjobs=16

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp\_rate2006 = 196

Sun Fire X2270 (Intel Xeon X5570 2.93GHz)

SPECfp\_rate\_base2006 = 181

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Mar-2009

Hardware Availability: Apr-2009

Software Availability: Jun-2009

## Peak Other Flags (Continued)

Fortran benchmarks:

-V -v -xjobs=16

Benchmarks using both Fortran and C:

-V -# -xjobs=16 -v

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/Sun-OpenSolaris-Studio-x86\\_64.20090710.00.html](http://www.spec.org/cpu2006/flags/Sun-OpenSolaris-Studio-x86_64.20090710.00.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/Sun-OpenSolaris-Studio-x86\\_64.20090710.00.xml](http://www.spec.org/cpu2006/flags/Sun-OpenSolaris-Studio-x86_64.20090710.00.xml)

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 01:58:04 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 28 April 2009.