



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint<sup>®</sup>\_rate2006 = 233

PowerEdge R610 (Intel Xeon X5550, 2.67 GHz)

SPECint\_rate\_base2006 = 216

CPU2006 license: 55


Test date: Mar-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Mar-2009

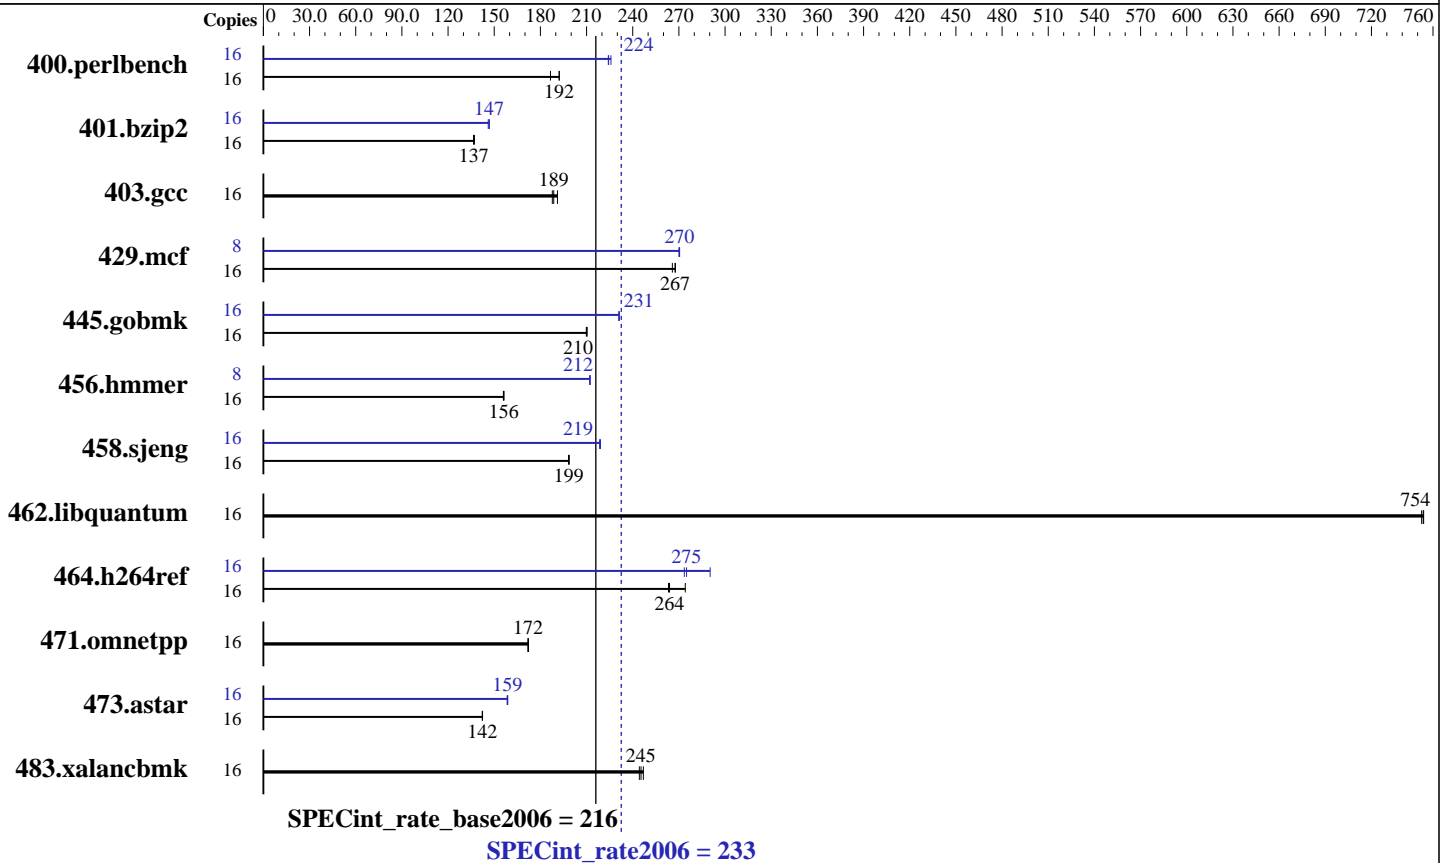

## Hardware

CPU Name: Intel Xeon X5550  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.06 GHz  
 CPU MHz: 2667  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 24 GB (6 x 4 GB DDR3-1333 DR RDIMM)  
 Disk Subsystem: 1 x 146 GB 10000 RPM SAS  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2, Kernel 2.6.16.60-0.21-smp  
 Compiler: Intel C++ Compiler Professional 11.0 for Linux Build 20090131 Package ID: l\_cproc\_p\_11.0.080  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 233

PowerEdge R610 (Intel Xeon X5550, 2.67 GHz)

SPECint\_rate\_base2006 = 216

CPU2006 license: 55

Test date: Mar-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Mar-2009

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	838	187	<b>813</b>	<b>192</b>	813	192	16	<b>697</b>	<b>224</b>	692	226	697	224
401.bzip2	16	<b>1129</b>	<b>137</b>	1130	137	1126	137	16	1057	146	1052	147	<b>1052</b>	<b>147</b>
403.gcc	16	686	188	674	191	<b>683</b>	<b>189</b>	16	686	188	674	191	<b>683</b>	<b>189</b>
429.mcf	16	549	266	545	268	<b>546</b>	<b>267</b>	8	<b>270</b>	<b>270</b>	270	270	270	270
445.gobmk	16	798	210	<b>799</b>	<b>210</b>	800	210	16	726	231	<b>726</b>	<b>231</b>	726	231
456.hammer	16	955	156	<b>956</b>	<b>156</b>	957	156	8	352	212	<b>352</b>	<b>212</b>	352	212
458.sjeng	16	976	198	974	199	<b>975</b>	<b>199</b>	16	884	219	<b>885</b>	<b>219</b>	886	219
462.libquantum	16	<b>440</b>	<b>754</b>	440	754	440	753	16	<b>440</b>	<b>754</b>	440	754	440	753
464.h264ref	16	1292	274	<b>1342</b>	<b>264</b>	1345	263	16	1220	290	1295	274	<b>1288</b>	<b>275</b>
471.omnetpp	16	581	172	582	172	<b>581</b>	<b>172</b>	16	581	172	582	172	<b>581</b>	<b>172</b>
473.astar	16	<b>789</b>	<b>142</b>	789	142	789	142	16	<b>708</b>	<b>159</b>	709	158	708	159
483.xalanbmk	16	<b>450</b>	<b>245</b>	452	244	447	247	16	<b>450</b>	<b>245</b>	452	244	447	247

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalanbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-alloc  
-opt-malloc-options=3 -opt-prefetch

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 233

PowerEdge R610 (Intel Xeon X5550, 2.67 GHz)

SPECint\_rate\_base2006 = 216

CPU2006 license: 55

Test date: Mar-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Mar-2009

## Base Optimization Flags (Continued)

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/080/bin/intel64/icc

456.hmmer: /opt/intel/Compiler/11.0/080/bin/intel64/icc

458.sjeng: /opt/intel/Compiler/11.0/080/bin/intel64/icc

C++ benchmarks (except as noted below):

icpc

473.astar: /opt/intel/Compiler/11.0/080/bin/intel64/icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

473.astar: -DSPEC\_CPU\_LP64

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -ansi-alias -opt-prefetch

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 233

PowerEdge R610 (Intel Xeon X5550, 2.67 GHz)

SPECint\_rate\_base2006 = 216

CPU2006 license: 55

Test date: Mar-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Mar-2009

## Peak Optimization Flags (Continued)

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: basepeak = yes

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
-ipo -no-prec-div -ansi-alias

456.hmmcr: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=routine -auto-ilp32  
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 233

PowerEdge R610 (Intel Xeon X5550, 2.67 GHz)

SPECint\_rate\_base2006 = 216

CPU2006 license: 55

Test date: Mar-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Mar-2009

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.02.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.02.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 02:04:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 28 April 2009.