



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp®_rate2006 = 119

Motherboard H8DMR-82, AMD Opteron 2389

SPECfp_rate_base2006 = 106

CPU2006 license: 001176


Test date: Apr-2009

Test sponsor: Supermicro

Hardware Availability: Nov-2008

Tested by: Supermicro

Software Availability: Jun-2008

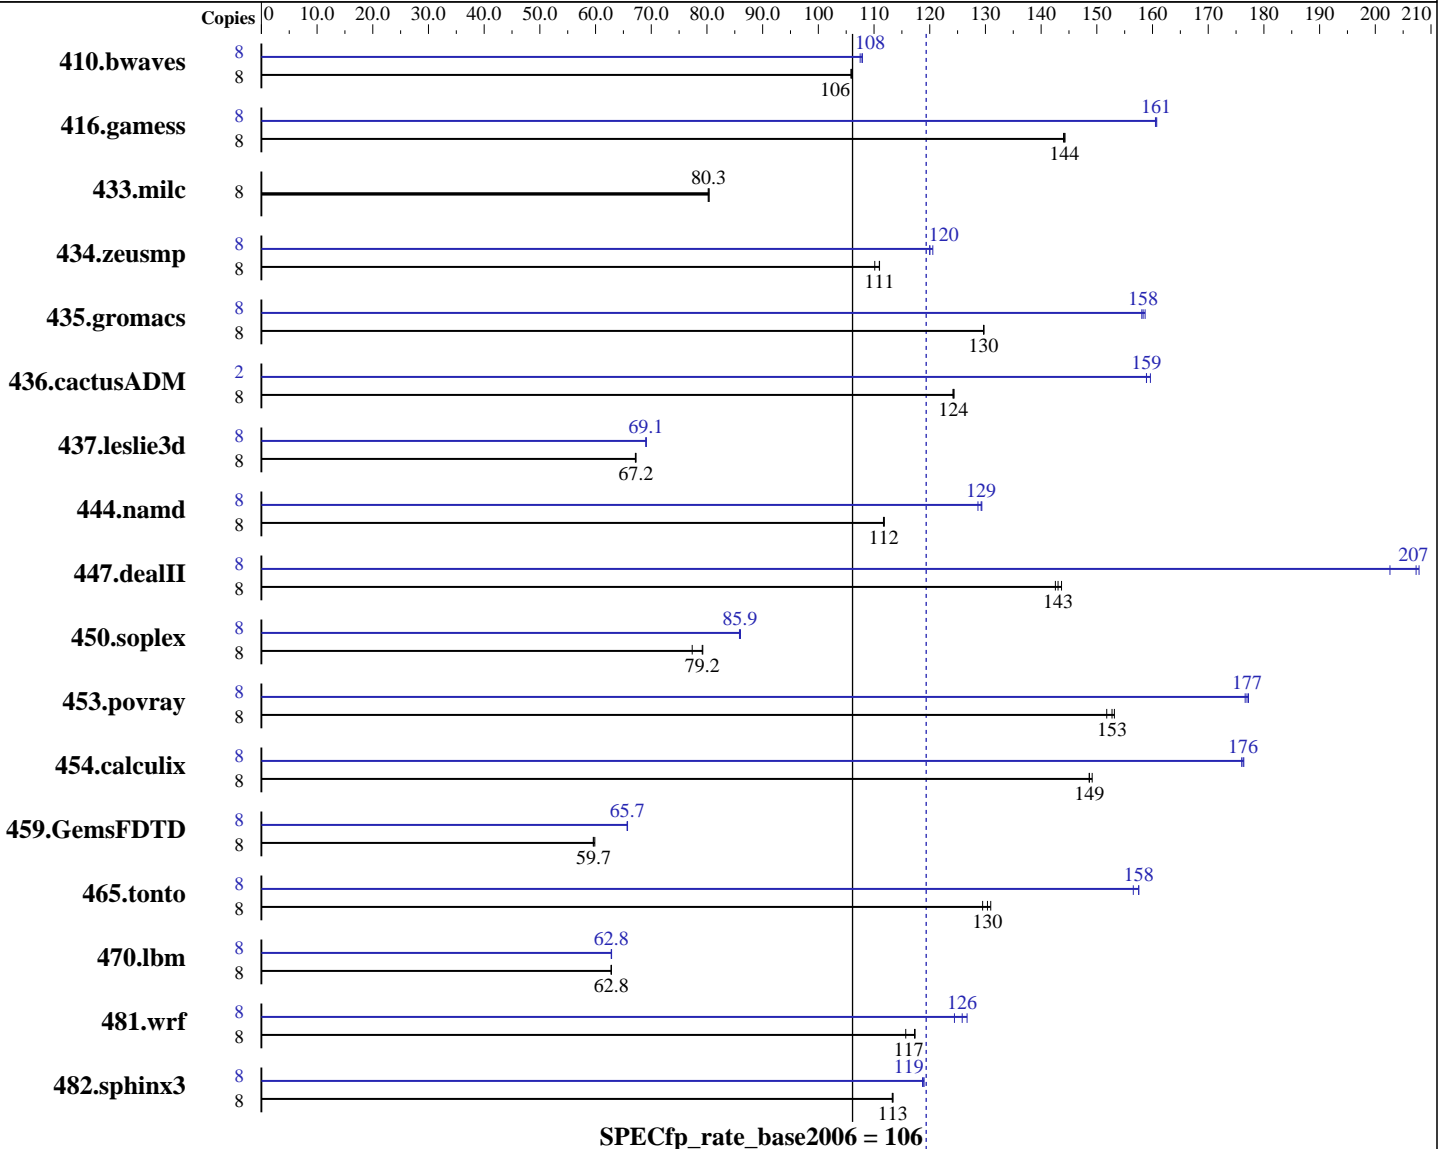

SPECfp_rate2006 = 119

Hardware

CPU Name: AMD Opteron 2389
 CPU Characteristics: 2900
 CPU MHz: Integrated
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: PGI Server Complete Version 7.2
 PathScale Compiler Suite Version 3.2
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp_rate2006 = 119

Motherboard H8DMR-82, AMD Opteron 2389

SPECfp_rate_base2006 = 106

CPU2006 license: 001176

Test date: Apr-2009

Test sponsor: Supermicro

Hardware Availability: Nov-2008

Tested by: Supermicro

Software Availability: Jun-2008

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (8x4 GB, DDR2-800, CL5, Reg, Dual Rank)
Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
Other Hardware: None

Other Software: binutils 2.18
32-bit and 64-bit libhugetlbfs libraries

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1027	106	<u>1026</u>	<u>106</u>	1026	106	8	1011	108	1008	108	<u>1008</u>	<u>108</u>
416.gamess	8	1086	144	<u>1086</u>	<u>144</u>	1088	144	8	976	161	<u>975</u>	<u>161</u>	974	161
433.milc	8	915	80.2	914	80.4	<u>914</u>	<u>80.3</u>	8	915	80.2	914	80.4	<u>914</u>	<u>80.3</u>
434.zeusmp	8	656	111	661	110	<u>656</u>	<u>111</u>	8	607	120	604	121	<u>607</u>	<u>120</u>
435.gromacs	8	441	130	<u>441</u>	<u>130</u>	440	130	8	<u>361</u>	<u>158</u>	361	158	360	159
436.cactusADM	8	770	124	769	124	<u>769</u>	<u>124</u>	2	<u>150</u>	<u>159</u>	150	159	150	160
437.leslie3d	8	1120	67.2	1118	67.2	<u>1118</u>	<u>67.2</u>	8	1089	69.0	1088	69.1	<u>1089</u>	<u>69.1</u>
444.namd	8	574	112	574	112	<u>574</u>	<u>112</u>	8	499	129	<u>496</u>	<u>129</u>	496	129
447.dealII	8	642	143	<u>640</u>	<u>143</u>	637	144	8	440	208	452	203	<u>441</u>	<u>207</u>
450.soplex	8	863	77.4	<u>843</u>	<u>79.2</u>	842	79.3	8	777	85.8	776	86.0	<u>776</u>	<u>85.9</u>
453.povray	8	278	153	280	152	<u>279</u>	<u>153</u>	8	241	177	240	177	<u>240</u>	<u>177</u>
454.calculix	8	<u>444</u>	<u>149</u>	444	149	442	149	8	375	176	374	176	<u>374</u>	<u>176</u>
459.GemsFDTD	8	1424	59.6	<u>1422</u>	<u>59.7</u>	1418	59.9	8	<u>1291</u>	<u>65.7</u>	1291	65.7	1293	65.7
465.tonto	8	601	131	<u>604</u>	<u>130</u>	608	129	8	<u>500</u>	<u>158</u>	500	158	503	157
470.lbm	8	<u>1750</u>	<u>62.8</u>	1750	62.8	1750	62.8	8	1749	62.8	1748	62.9	<u>1749</u>	<u>62.8</u>
481.wrf	8	772	116	<u>762</u>	<u>117</u>	761	117	8	705	127	<u>710</u>	<u>126</u>	718	124
482.sphinx3	8	1377	113	<u>1375</u>	<u>113</u>	1375	113	8	<u>1312</u>	<u>119</u>	1313	119	1310	119

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores

Operating System Notes

The libhugetlbfs libraries were installed using the installation rpms that came with the distribution.

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=7168 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp_rate2006 = 119

Motherboard H8DMR-82, AMD Opteron 2389

SPECfp_rate_base2006 = 106

CPU2006 license: 001176

Test date: Apr-2009

Test sponsor: Supermicro

Hardware Availability: Nov-2008

Tested by: Supermicro

Software Availability: Jun-2008

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_MORECORE = "yes"

LD_LIBRARY_PATH = "/usr/cpu2006/amd909gh-libs/64:/usr/cpu2006/amd909gh-libs/32"

NCPUS = "4"

Tested system is built in open environment,
to ensure system stability, a 560W (minimum) ATX power
[4-pin (+12V), 8-pin (+12V) and 24-pin are required]
Product description can be obtained at
<http://www.supermicro.com/Aplus/motherboard/Opteron2000/MCP55/H8DMR-82.cfm>

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp_rate2006 = 119

Motherboard H8DMR-82, AMD Opteron 2389

SPECfp_rate_base2006 = 106

CPU2006 license: 001176

Test date: Apr-2009

Test sponsor: Supermicro

Hardware Availability: Nov-2008

Tested by: Supermicro

Software Availability: Jun-2008

Base Optimization Flags

C benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
--zc_eh -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Fortran benchmarks:

-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc=huge
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Benchmarks using both Fortran and C:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Fortran benchmarks:

-Mipa=jobs:4

Benchmarks using both Fortran and C:

-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks (except as noted below):

pathCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):

pathf95

410.bwaves: pgf95

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp_rate2006 = 119

Motherboard H8DMR-82, AMD Opteron 2389

SPECfp_rate_base2006 = 106

CPU2006 license: 001176

Test date: Apr-2009

Test sponsor: Supermicro

Hardware Availability: Nov-2008

Tested by: Supermicro

Software Availability: Jun-2008

Peak Compiler Invocation (Continued)

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

435.gromacs: pathcc pathf95

481.wrf: pathcc pathf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64

436.cactusADM: -DSPEC_CPU_LP64 -Mnomain

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

453.povray: -DSPEC_CPU_LP64

454.calculix: -DSPEC_CPU_LP64 -Mnomain

459.GemsFDTD: -DSPEC_CPU_LP64

465.tonto: -DSPEC_CPU_LP64

470.lbm: -DSPEC_CPU_LP64

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore

482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge

-Mprefetch=t0 -Mloop32 -Mfprelaxed -Mipa=fast -Mipa=inline

-tp barcelona-64 -Bstatic_pgi

482.sphinx3: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)

-Mipa=fast(pass 2) -Mipa=inline(pass 2)

-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc

-tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp_rate2006 = 119

Motherboard H8DMR-82, AMD Opteron 2389

SPECfp_rate_base2006 = 106

CPU2006 license: 001176

Test date: Apr-2009

Test sponsor: Supermicro

Hardware Availability: Nov-2008

Tested by: Supermicro

Software Availability: Jun-2008

Peak Optimization Flags (Continued)

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mvect=cachesize:6291456 -fastsse
-Munroll=n:4 -Munroll=m:8 -Msmartalloc=huge -Mnodepch
-Mfprelaxed --zc_eh -tp barcelona-64 -Bstatic_pgi

447.deallI: -march=barcelona -Ofast -static -INLINE:aggressive=on
-fno-exceptions -m32

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -L/usr/lib -lhugetlbfs(pass 2) -O3
-INLINE:aggressive=on -OPT:IEEE_arith=3
-OPT:IEEE_NaN_Inf=off -OPT:fold_unsigned_relops=on
-OPT:malloc_alg=1 -CG:load_exe=0 -fno-exceptions -m32

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

Fortran benchmarks:

410.bwaves: -Mvect=cachesize:6291456 -fastsse -Msmartalloc
-Mprefetch=nta -Mfprelaxed -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256

434.zeusmp: -Mvect=cachesize:6291456 -fastsse -Mfprelaxed
-Mprefetch=distance:8 -Mprefetch=t0 -Msmartalloc=huge
-Msmartalloc=hugebss -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mvect=cachesize:6291456 -fastsse -Mvect=fuse
-Msmartalloc=huge -Mprefetch=distance:8 -Mprefetch=t0
-Mfprelaxed -tp barcelona-64 -Bstatic_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:prefer_lru_reg=off
-OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525
-OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp_rate2006 = 119

Motherboard H8DMR-82, AMD Opteron 2389

SPECfp_rate_base2006 = 106

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Apr-2009
Hardware Availability: Nov-2008
Software Availability: Jun-2008

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

436.cactusADM: -Mvect=cachesize:6291456 -fastsse -Mconcur
-Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

454.calculix: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge
-Mprefetch=t0 -Mpre -Mfprelaxed -tp barcelona-64
-Bstatic_pgi

481.wrf: -march=barcelona -Ofast -LNO:blocking=off
-LNO:prefetch_ahead=10 -LANG:copyinout=off
-IPA:callee_limit=5000 -GRA:prioritize_by_density=on
-OPT:malloc_alg=1 -m3dnow
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

Peak Other Flags

C benchmarks:
-Mipa=jobs:4(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks (except as noted below):
-Mipa=jobs:4(pass 2)

416.gamess: No flags used

459.GemsFDTD: No flags used

465.tonto: No flags used

Benchmarks using both Fortran and C (except as noted below):
-Mipa=jobs:4(pass 2)

435.gromacs: No flags used

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp_rate2006 = 119

Motherboard H8DMR-82, AMD Opteron 2389

SPECfp_rate_base2006 = 106

CPU2006 license: 001176

Test date: Apr-2009

Test sponsor: Supermicro

Hardware Availability: Nov-2008

Tested by: Supermicro

Software Availability: Jun-2008

Peak Other Flags (Continued)

481.wrf: No flags used

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.html
http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.html
<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.xml
http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.xml
<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 00:36:04 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 June 2009.