



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®\_rate2006 = 263

IBM Power 550 (5.0 GHz, 8 core)

SPECint\_rate\_base2006 = 215

CPU2006 license: 11


Test date: Apr-2009

Test sponsor: IBM Corporation

Hardware Availability: May-2009

Tested by: IBM Corporation

Software Availability: May-2009

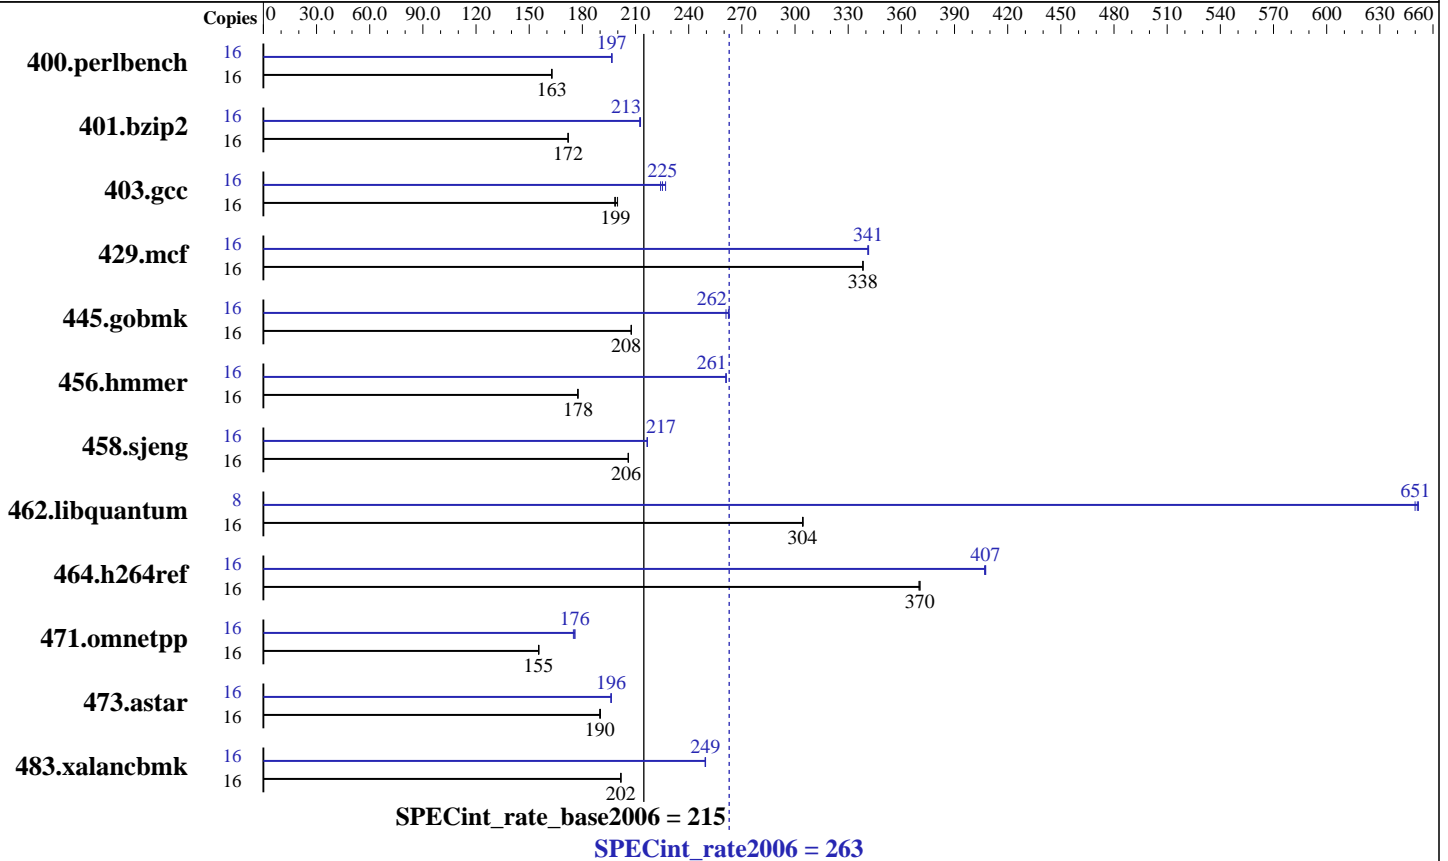

### Hardware

CPU Name: POWER6+  
 CPU Characteristics: 5000  
 CPU MHz: Integrated  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 4 chips, 2 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4,6,8 cores  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 4 MB I+D on chip per core  
 L3 Cache: 32 MB I+D off chip per chip  
 Other Cache: None  
 Memory: 128 GB (32x4 GB) DDR2 667 MHz  
 Disk Subsystem: 2x146 GB SAS 15K RPM  
 Other Hardware: None

### Software

Operating System: IBM AIX V6.1  
 with the 6100-03 Technology Level  
 Compiler: XL C/C++ Enterprise Edition V10.1.0.2 for AIX  
 Auto Parallel: No  
 File System: AIX/JFS2  
 System State: Multi-user  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 263

IBM Power 550 (5.0 GHz, 8 core)

SPECint\_rate\_base2006 = 215

CPU2006 license: 11

Test date: Apr-2009

Test sponsor: IBM Corporation

Hardware Availability: May-2009

Tested by: IBM Corporation

Software Availability: May-2009

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	961	163	960	163	<u>960</u>	<u>163</u>	16	795	197	<u>795</u>	<u>197</u>	795	197
401.bzip2	16	897	172	898	172	<u>898</u>	<u>172</u>	16	726	213	<u>727</u>	<u>213</u>	727	212
403.gcc	16	<b>648</b>	<b>199</b>	644	200	650	198	16	575	224	<u>572</u>	<u>225</u>	567	227
429.mcf	16	<b>431</b>	<b>338</b>	431	338	431	338	16	428	341	427	342	<u>428</u>	<u>341</u>
445.gobmk	16	808	208	<u>809</u>	<u>208</u>	809	208	16	643	261	639	263	<b>640</b>	<u>262</u>
456.hammer	16	842	177	841	178	<u>841</u>	<u>178</u>	16	<u>572</u>	<u>261</u>	572	261	572	261
458.sjeng	16	<b>940</b>	<b>206</b>	940	206	940	206	16	894	217	<b>894</b>	<b>217</b>	893	217
462.libquantum	16	1088	305	<u>1090</u>	<u>304</u>	1090	304	8	<u>255</u>	<u>651</u>	254	652	255	650
464.h264ref	16	<b>956</b>	<b>370</b>	956	370	957	370	16	<b>869</b>	<b>407</b>	870	407	869	408
471.omnetpp	16	643	156	<b>644</b>	<b>155</b>	644	155	16	572	175	<b>569</b>	<b>176</b>	569	176
473.astar	16	592	190	<b>591</b>	<b>190</b>	591	190	16	572	196	573	196	<b>572</b>	<b>196</b>
483.xalancbmk	16	547	202	547	202	<b>547</b>	<b>202</b>	16	442	250	<b>443</b>	<b>249</b>	443	249

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Peak Tuning Notes

fdpr binary optimization tool used for 400.perlbench  
401.bzip2 403.gcc 456.hammer 458.sjeng 464.h264ref  
471.omnetpp 473.astar 483.xalancbmk  
with options -O4 -vrox -pbsi  
fdpr binary optimization tool used for 429.mcf  
with options -kr -lap -lro -nop -nopr -RC -tb -tlo  
-vro -lu 9 -rt 0.95 -sdpla 8 -sdpms 512 -shci 15 -si  
-sidf 45 -siht 10 -lun 13 -m ppc405 -vrox -gcpyp  
fdpr binary optimization tool used for 445.gobmk  
with options -O3 -vrox -sdp 9  
fdpr binary optimization tool used for 462.libquantum  
with options -bf -bp -dp -hr -kr -las -lro -nop -RC  
-RD -tlo -vro -A 32 -isf 12 -lu 9 -rt 0.00 -ihf 20  
-sdp 9 -shci 90 -si -sidf 50 -vrox -dce

## Submit Notes

The config file option 'submit' was used to assign benchmark copy to specific kernel thread using the "bindprocessor" command (see flags file for details).

## Operating System Notes

all ulimits set to unlimited.  
2000 16M large pages defined with vmo command



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 263

IBM Power 550 (5.0 GHz, 8 core)

SPECint\_rate\_base2006 = 215

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Apr-2009

Hardware Availability: May-2009

Software Availability: May-2009

## Platform Notes

System set to "Enhanced" mode when defining partition on HMC.

## General Notes

Environment variables set by runspec before the start of the run:

MALLOCOPTIONS = "pool"

MEMORY\_AFFINITY = "MCM"

XLFRTEOPTS = "intrinthds=1"

See the flags file for details on settings.

## Base Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_AIX  
462.libquantum: -DSPEC\_CPU\_AIX  
464.h264ref: -DSPEC\_CPU\_AIX -qchars=signed  
483.xalancbmk: -DSPEC\_CPU\_AIX

## Base Optimization Flags

C benchmarks:

-bmaxdata:0x50000000 -O5 -qlargepage -D\_ILS\_MACROS -qalias=noansi  
-qalloca -blpdata

C++ benchmarks:

-bmaxdata:0x20000000 -O5 -qlargepage -D\_ILS\_MACROS -qrtti=all  
-D\_\_IBM\_FAST\_SET\_MAP\_ITERATOR -blpdata

## Base Other Flags

C benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036

C++ benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 263

IBM Power 550 (5.0 GHz, 8 core)

SPECint\_rate\_base2006 = 215

CPU2006 license: 11

Test date: Apr-2009

Test sponsor: IBM Corporation

Hardware Availability: May-2009

Tested by: IBM Corporation

Software Availability: May-2009

## Peak Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_AIX  
462.libquantum: -DSPEC\_CPU\_AIX  
464.h264ref: -DSPEC\_CPU\_AIX -qchars=signed  
483.xalanbmk: -DSPEC\_CPU\_AIX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5  
-D\_ILS\_MACROS -qalias=noansi -qfdpr -bdatapsize:64K  
-bstacksize:64K -btextsize:64K  
401.bzip2: -bmaxdata:0x4fffffff -qpdf1(pass 1) -qpdf2(pass 2) -O4  
-qlargepage -D\_ILS\_MACROS -qfdpr -blpdata  
403.gcc: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O4  
-qlargepage -D\_ILS\_MACROS -qalloca -qfdpr -blpdata  
429.mcf: -bmaxdata:0x50000000 -O5 -qlargepage -D\_ILS\_MACROS -qfdpr  
-blpdata  
445.gobmk: -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=auto -qtune=auto  
-qlargepage -D\_ILS\_MACROS -qfdpr -blpdata  
456.hmmer: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qenablevmx -qvecvol  
-D\_ILS\_MACROS -qfdpr -bdatapsize:64K -bstacksize:64K  
-btextsize:64K  
458.sjeng: -O5 -qlargepage -qenablevmx -qvecvol -D\_ILS\_MACROS  
-qfdpr -blpdata  
462.libquantum: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -q64  
-D\_ILS\_MACROS -qfdpr -blpdata  
464.h264ref: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -D\_ILS\_MACROS -qfdpr  
-bdatapsize:64K -bstacksize:64K -btextsize:64K

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 263

IBM Power 550 (5.0 GHz, 8 core)

SPECint\_rate\_base2006 = 215

CPU2006 license: 11

Test date: Apr-2009

Test sponsor: IBM Corporation

Hardware Availability: May-2009

Tested by: IBM Corporation

Software Availability: May-2009

## Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5  
-qlargepage -D\_ILS\_MACROS -qfdpr -qalign=natural  
-qrtti=all -qinlglue -D\_\_IBM\_FAST\_SET\_MAP\_ITERATOR  
-blpdata -btextpsize:64K

473.astar: -bmaxdata:0x20000000 -O5 -qlargepage -D\_ILS\_MACROS -qfdpr  
-qenablevmx -qvecnvml -qinlglue -qalign=natural -blpdata

483.xalancbmk: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5  
-qlargepage -D\_ILS\_MACROS -qfdpr -qinlglue  
-D\_\_IBM\_FAST\_VECTOR -blpdata -btextpsize:64K

## Peak Other Flags

C benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036

C++ benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-XL.html>

<http://www.spec.org/cpu2006/flags/IBM-AIX.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-XL.xml>

<http://www.spec.org/cpu2006/flags/IBM-AIX.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 23:55:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 12 May 2009.