



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation


IBM BladeCenter JS43 Express (4.2 GHz, 8 core, SLES)

SPECint®_rate2006 = 219

SPECint_rate_base2006 = 184

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Mar-2009
Hardware Availability: May-2009
Software Availability: Mar-2009

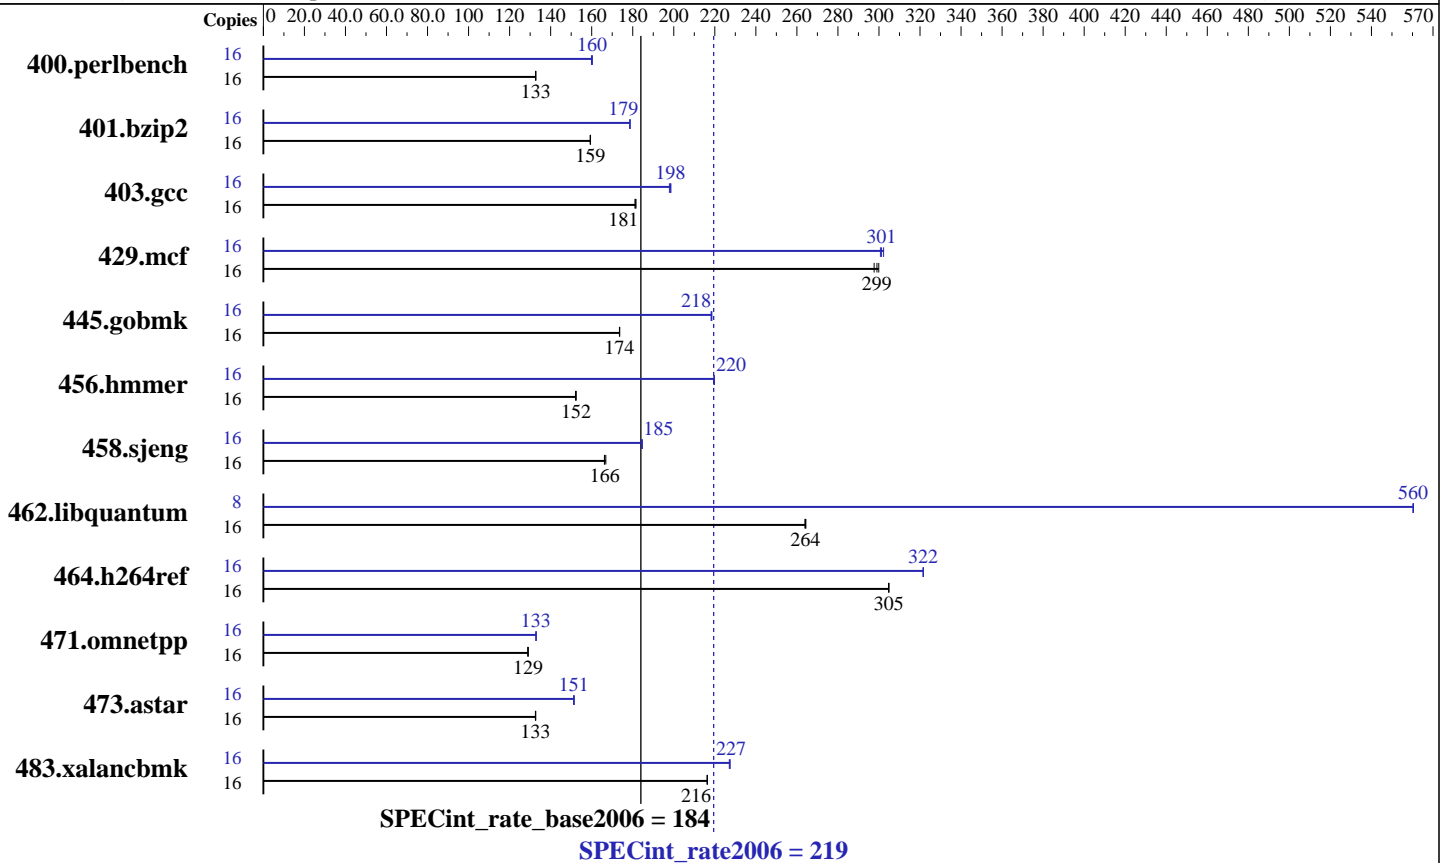

Hardware

CPU Name: POWER6+
 CPU Characteristics:
 CPU MHz: 4200
 FPU: Integrated
 CPU(s) enabled: 8 cores, 4 chips, 2 cores/chip, 2 threads/core
 CPU(s) orderable: 8 cores
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per core
 L3 Cache: 32 MB I+D off chip per chip
 Other Cache: None
 Memory: 64 GB (16x4 GB) DDR2 667 MHz
 Disk Subsystem: 1x146 GB SAS 15K RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11
 Compiler: IBM XL C/C++ for Linux, V10.1
 Updated with the Mar2009 PTF.
 Auto Parallel: No
 File System: ext3
 System State: Run Level 3 (Multi-User)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: -Post-Link Optimization for Linux on POWER, Version 5.4.0-21
 -MicroQuill SmartHeap 8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter JS43 Express (4.2 GHz, 8 core, SLES)

SPECint_rate2006 = 219

SPECint_rate_base2006 = 184

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Mar-2009
Hardware Availability: May-2009
Software Availability: Mar-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	1179	133	1177	133	<u>1177</u>	<u>133</u>	16	975	160	<u>976</u>	<u>160</u>	978	160
401.bzip2	16	<u>969</u>	<u>159</u>	969	159	968	159	16	864	179	864	179	<u>864</u>	<u>179</u>
403.gcc	16	711	181	<u>711</u>	<u>181</u>	709	182	16	<u>649</u>	<u>198</u>	648	199	651	198
429.mcf	16	<u>488</u>	<u>299</u>	487	300	490	298	16	485	301	483	302	<u>484</u>	<u>301</u>
445.gobmk	16	966	174	967	174	<u>967</u>	<u>174</u>	16	769	218	768	219	<u>768</u>	<u>218</u>
456.hmmmer	16	981	152	980	152	<u>980</u>	<u>152</u>	16	<u>679</u>	<u>220</u>	680	220	679	220
458.sjeng	16	<u>1164</u>	<u>166</u>	1165	166	1160	167	16	<u>1049</u>	<u>185</u>	1048	185	1050	184
462.libquantum	16	<u>1255</u>	<u>264</u>	1256	264	1254	264	8	296	560	<u>296</u>	<u>560</u>	296	560
464.h264ref	16	1162	305	<u>1162</u>	<u>305</u>	1162	305	16	1101	322	1101	322	<u>1101</u>	<u>322</u>
471.omnetpp	16	775	129	776	129	<u>775</u>	<u>129</u>	16	753	133	752	133	<u>753</u>	<u>133</u>
473.astar	16	847	133	846	133	<u>847</u>	<u>133</u>	16	741	152	743	151	<u>742</u>	<u>151</u>
483.xalancbmk	16	<u>510</u>	<u>216</u>	510	216	510	216	16	486	227	<u>486</u>	<u>227</u>	485	227

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
Benchmarks bound to a processor using numactl on the submit command.

General Notes

```

kernel release 2.6.27.19-5-ppc64.
See flags file for details on following settings.
ulimit -s (stack) set to 1048576.
System configured with libhugetlbfs library for application access to large pages
Large pages reserved as follows by root user:
    echo 1600 > /proc/sys/vm/nr_hugepages
Environment variables set before executing benchmarks.
    export HUGETLB_VERBOSE=0
    export HUGETLB_MORECORE=yes
    export XLFRTEOPTS=intrinths=1
IBM Post-Link Optimization tool was used for these benchmarks, with options:
400.perlbench : "-imullX" (instrumentation phase), "-O4 -omullX" (optimization phase)
401.bzip2 : same as 400.perlbench
403.gcc : same as 400.perlbench
456.hmmmer : same as 400.perlbench
458.sjeng : same as 400.perlbench
483.xalancbmk : same as 400.perlbench
429.mcf : "-imullX" (instrumentation phase), "-bf -dp -hr -las -pca -RC -RD
    -rmte -si -tlo -A 64 -isf 104 -lu 8 -rt 0.16
    -hrf 0.18 -ihf 40 -sdp 6 -sdpsms 128 -shci 65 -si -sidf 45 -omullX" (optimization phase)
445.gobmk : "-imullX" (instrumentation phase), "-q -O3 -A 32 -omullX" (optimization phase)
462.libquantum : "-imullX" (instrumentation phase), "-bf -dp -lro -nop -RC -RD -tb -tlo -vro -A 4

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter JS43 Express (4.2 GHz, 8 core, SLES)

SPECint_rate2006 = 219

SPECint_rate_base2006 = 184

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Mar-2009
Hardware Availability: May-2009
Software Availability: Mar-2009

General Notes (Continued)

-isf 88 -lu 8 -hrf 0.10 -sdp 4 -lun 27 -omullX" (optimization phase)
473.astar : "-imullX" (instrumentation phase), "-O4 -omullX -see 1" (optimization phase)
464.h264ref : "-O4" (optimization phase)

Base Compiler Invocation

C benchmarks:
xlc -qlanglvl=extc99

C++ benchmarks:
x1C

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_PPC
462.libquantum: -DSPEC_CPU_LINUX
464.h264ref: -qchars=signed
483.xalanbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-O5 -qarch=pwr6 -qtune=pwr6 -qalias=noansi -qalloca -lhugetlbfs

C++ benchmarks:
-O5 -qarch=pwr6 -qtune=pwr6 -qrtti -lsmartheap

Base Other Flags

C benchmarks:
-qipa=noobject -qipa=threads

C++ benchmarks:
-qipa=noobject -qipa=threads

Peak Compiler Invocation

C benchmarks:
xlc -qlanglvl=extc99

C++ benchmarks:
x1C



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter JS43 Express (4.2 GHz, 8 core, SLES)

SPECint_rate2006 = 219

SPECint_rate_base2006 = 184

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Mar-2009
Hardware Availability: May-2009
Software Availability: Mar-2009

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_PPC
403.gcc: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
464.h264ref: -qchars=signed
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr6 -qtune=pwr6 -qalias=noansi -lsmartheap
401.bzip2: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=pwr6 -qtune=pwr6 -lhugetlbfs
403.gcc: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr6 -qtune=pwr6 -qalloca -q64 -lhugetlbfs
429.mcf: -Wl,-q -O5 -qarch=pwr6 -qtune=pwr6 -qnoenablevmx -lhugetlbfs
445.gobmk: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr6 -qtune=pwr6 -qnoenablevmx -lhugetlbfs
456.hmmmer: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=pwr6 -qtune=pwr6 -lhugetlbfs
458.sjeng: -Wl,-q -O5 -qarch=pwr6 -qtune=pwr6 -lhugetlbfs
462.libquantum: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=pwr6 -qtune=pwr6 -qnoenablevmx -q64 -lhugetlbfs
464.h264ref: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=pwr6 -qtune=pwr6 -q64 -lhugetlbfs

C++ benchmarks:

471.omnetpp: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr6 -qtune=pwr6 -qrtti -lsmartheap
473.astar: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr6 -qtune=pwr6 -qnoenablevmx -lsmartheap
483.xalancbmk: -Wl,-q -O5 -qarch=pwr6 -qtune=pwr6 -lsmartheap



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter JS43 Express (4.2 GHz, 8 core, SLES)

SPECint_rate2006 = 219

SPECint_rate_base2006 = 184

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Mar-2009
Hardware Availability: May-2009
Software Availability: Mar-2009

Peak Other Flags

C benchmarks:
-qipa=noobject -qipa=threads

C++ benchmarks:
-qipa=noobject -qipa=threads

The flags file that was used to format this result can be browsed at
<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.html>

You can also download the XML flags source by saving the following link:
<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 23:46:35 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 May 2009.