



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/T120a-M  
(Intel Xeon E5504)

SPECfp<sup>®</sup>\_rate2006 = 115

SPECfp\_rate\_base2006 = 111

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Apr-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

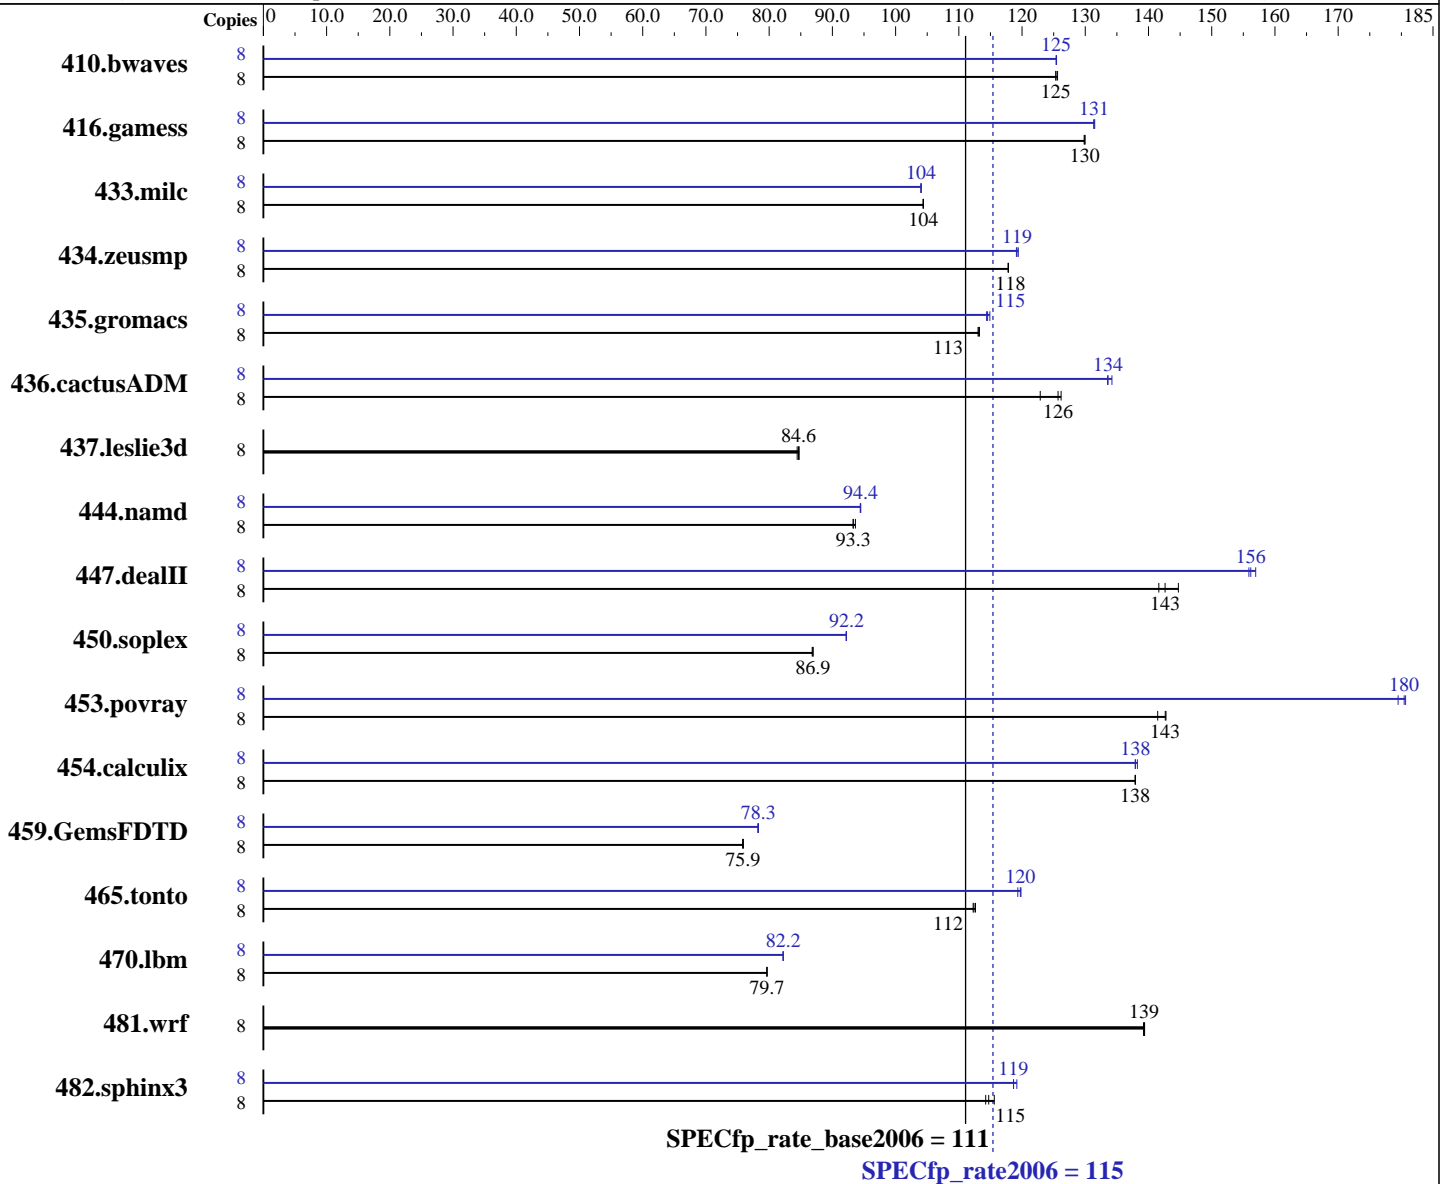

### Hardware

CPU Name: Intel Xeon E5504  
 CPU Characteristics:  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64)  
 SP2 with patch Linux kernel 20090119,  
 Kernel 2.6.16.60-0.34-smp  
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux  
 Build 20090131 Package ID: l\_cproc\_p\_11.0.081,  
 l\_cprof\_p\_11.0.081  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/T120a-M  
(Intel Xeon E5504)

SPECfp\_rate2006 = 115

SPECfp\_rate\_base2006 = 111

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Apr-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

L3 Cache: 4 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (12 X 4 GB PC3-8500R running at 800 MHz)  
Disk Subsystem: 1x73.2 GB SAS, 15000 RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

| Benchmark     | Base   |             |             |             |            |             |             | Peak   |             |             |             |             |             |             |
|---------------|--------|-------------|-------------|-------------|------------|-------------|-------------|--------|-------------|-------------|-------------|-------------|-------------|-------------|
|               | Copies | Seconds     | Ratio       | Seconds     | Ratio      | Seconds     | Ratio       | Copies | Seconds     | Ratio       | Seconds     | Ratio       | Seconds     | Ratio       |
| 410.bwaves    | 8      | <b>867</b>  | <b>125</b>  | 865         | 126        | 867         | 125         | 8      | 867         | 125         | 867         | 125         | <b>867</b>  | <b>125</b>  |
| 416.gamess    | 8      | 1207        | 130         | <b>1206</b> | <b>130</b> | 1205        | 130         | 8      | 1193        | 131         | <b>1192</b> | <b>131</b>  | 1191        | 131         |
| 433.milc      | 8      | <b>703</b>  | <b>104</b>  | 703         | 104        | 704         | 104         | 8      | 706         | 104         | <b>706</b>  | <b>104</b>  | 706         | 104         |
| 434.zeusmp    | 8      | 618         | 118         | <b>618</b>  | <b>118</b> | 618         | 118         | 8      | 610         | 119         | 611         | 119         | <b>611</b>  | <b>119</b>  |
| 435.gromacs   | 8      | 504         | 113         | 505         | 113        | <b>505</b>  | <b>113</b>  | 8      | 497         | 115         | <b>499</b>  | <b>115</b>  | 499         | 114         |
| 436.cactusADM | 8      | 778         | 123         | <b>761</b>  | <b>126</b> | 758         | 126         | 8      | <b>716</b>  | <b>134</b>  | 712         | 134         | 716         | 134         |
| 437.leslie3d  | 8      | 887         | 84.7        | 891         | 84.4       | <b>888</b>  | <b>84.6</b> | 8      | 887         | 84.7        | 891         | 84.4        | <b>888</b>  | <b>84.6</b> |
| 444.namd      | 8      | <b>688</b>  | <b>93.3</b> | 685         | 93.6       | 688         | 93.3        | 8      | <b>679</b>  | <b>94.4</b> | 679         | 94.5        | 680         | 94.4        |
| 447.dealII    | 8      | 632         | 145         | 646         | 142        | <b>642</b>  | <b>143</b>  | 8      | <b>586</b>  | <b>156</b>  | 583         | 157         | 587         | 156         |
| 450.soplex    | 8      | 767         | 87.0        | 769         | 86.8       | <b>768</b>  | <b>86.9</b> | 8      | <b>723</b>  | <b>92.2</b> | 723         | 92.2        | 724         | 92.2        |
| 453.povray    | 8      | 298         | 143         | 301         | 141        | <b>298</b>  | <b>143</b>  | 8      | 237         | 179         | 236         | 181         | <b>236</b>  | <b>180</b>  |
| 454.calculix  | 8      | 478         | 138         | <b>479</b>  | <b>138</b> | 479         | 138         | 8      | <b>478</b>  | <b>138</b>  | 477         | 138         | 479         | 138         |
| 459.GemsFDTD  | 8      | 1120        | 75.8        | 1118        | 75.9       | <b>1119</b> | <b>75.9</b> | 8      | 1084        | 78.3        | 1085        | 78.2        | <b>1085</b> | <b>78.3</b> |
| 465.tonto     | 8      | 701         | 112         | 699         | 113        | <b>700</b>  | <b>112</b>  | 8      | 657         | 120         | <b>657</b>  | <b>120</b>  | 660         | 119         |
| 470.lbm       | 8      | 1380        | 79.7        | 1380        | 79.6       | <b>1380</b> | <b>79.7</b> | 8      | 1337        | 82.2        | <b>1337</b> | <b>82.2</b> | 1337        | 82.2        |
| 481.wrf       | 8      | 641         | 139         | 642         | 139        | <b>641</b>  | <b>139</b>  | 8      | 641         | 139         | 642         | 139         | <b>641</b>  | <b>139</b>  |
| 482.sphinx3   | 8      | <b>1359</b> | <b>115</b>  | 1349        | 116        | 1365        | 114         | 8      | <b>1314</b> | <b>119</b>  | 1308        | 119         | 1314        | 119         |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

BIOS setting:  
NUMA configuration: Enabled



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/T120a-M  
(Intel Xeon E5504)

SPECfp\_rate2006 = 115

SPECfp\_rate\_base2006 = 111

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Apr-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

## General Notes

The NEC Express5800/T120a-M(Intel Xeon E5504) and the Bull NovaScale T860 E2 (Intel Xeon E5504, 2.00 GHz) models are electronically equivalent. The results have been measured on a NEC Express5800/T120a-M(Intel Xeon E5504) model.

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/T120a-M  
(Intel Xeon E5504)

**SPECfp\_rate2006 = 115**

**SPECfp\_rate\_base2006 = 111**

**CPU2006 license:** 9006  
**Test sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test date:** Apr-2009  
**Hardware Availability:** Apr-2009  
**Software Availability:** Feb-2009

## Base Optimization Flags (Continued)

Fortran benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):  
icpc

450.soplex: icpc -m32

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icc ifort

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/T120a-M  
(Intel Xeon E5504)

SPECfp\_rate2006 = 115

SPECfp\_rate\_base2006 = 111

CPU2006 license: 9006  
Test sponsor: NEC Corporation  
Tested by: NEC Corporation

Test date: Apr-2009  
Hardware Availability: Apr-2009  
Software Availability: Feb-2009

## Peak Optimization Flags

### C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias

470.lbm: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

### C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -opt-prefetch

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -auto

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/T120a-M  
(Intel Xeon E5504)

**SPECfp\_rate2006 = 115**

**SPECfp\_rate\_base2006 = 111**

**CPU2006 license:** 9006  
**Test sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test date:** Apr-2009  
**Hardware Availability:** Apr-2009  
**Software Availability:** Feb-2009

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -opt-prefetch -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revG.html>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revE.20090710.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revG.xml>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revE.20090710.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 00:32:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 26 May 2009.