



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint<sup>®</sup>\_rate2006 = 204

Proliant DL165 G6  
(2.6 GHz AMD Opteron 2435)

SPECint\_rate\_base2006 = 160

CPU2006 license: 3


Test date: May-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2009

Tested by: Hewlett-Packard Company

Software Availability: Apr-2009

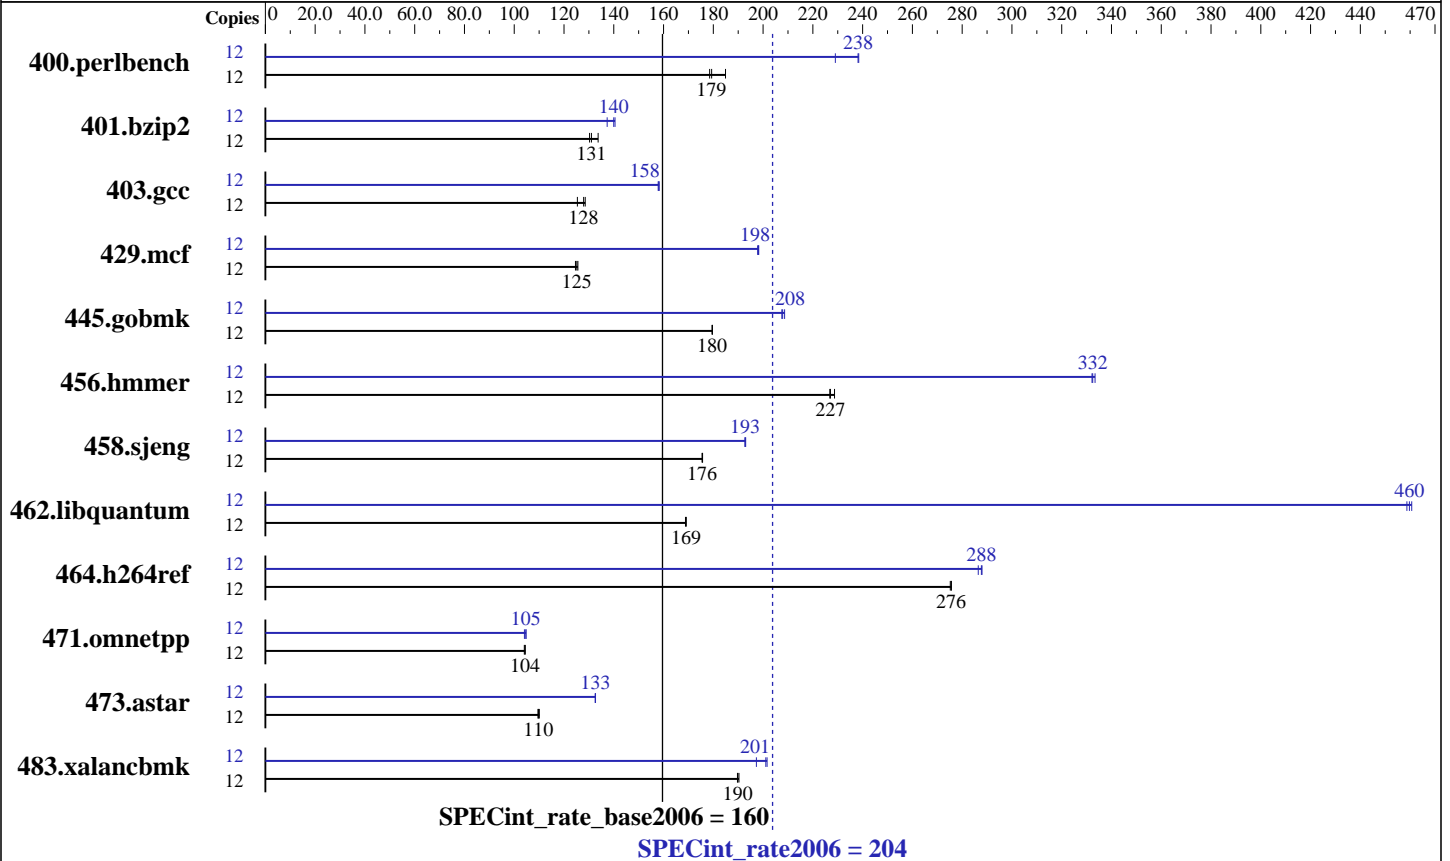

### Hardware

CPU Name: AMD Opteron 2435  
 CPU Characteristics:  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 6 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 32 GB (8x4 GB, PC2-6400P CL5)  
 Disk Subsystem: 1 x 500 GB 5.4 K RPM SATA  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Advanced Platform, Kernel 2.6.18-128.el5  
 Compiler: PGI Server Complete Version 8.0  
 x86 Open64 4.2.2 Compiler Suite  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: binutils 2.18  
 SmartHeap 8.1 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint\_rate2006 = 204

Proliant DL165 G6  
(2.6 GHz AMD Opteron 2435)

SPECint\_rate\_base2006 = 160

CPU2006 license: 3

Test date: May-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2009

Tested by: Hewlett-Packard Company

Software Availability: Apr-2009

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	634	185	657	179	<b>654</b>	<b>179</b>	12	512	229	492	238	<b>492</b>	<b>238</b>
401.bzip2	12	866	134	<b>884</b>	<b>131</b>	889	130	12	843	137	824	141	<b>827</b>	<b>140</b>
403.gcc	12	752	129	<b>755</b>	<b>128</b>	771	125	12	<b>611</b>	<b>158</b>	612	158	610	158
429.mcf	12	872	126	<b>874</b>	<b>125</b>	878	125	12	552	198	<b>552</b>	<b>198</b>	553	198
445.gobmk	12	701	180	701	180	<b>701</b>	<b>180</b>	12	607	208	603	209	<b>606</b>	<b>208</b>
456.hammer	12	<b>493</b>	<b>227</b>	490	229	494	227	12	337	332	336	333	<b>337</b>	<b>332</b>
458.sjeng	12	827	176	826	176	<b>827</b>	<b>176</b>	12	<b>753</b>	<b>193</b>	753	193	752	193
462.libquantum	12	1471	169	<b>1471</b>	<b>169</b>	1473	169	12	<b>541</b>	<b>460</b>	542	459	540	461
464.h264ref	12	965	275	<b>964</b>	<b>276</b>	963	276	12	927	286	<b>923</b>	<b>288</b>	922	288
471.omnetpp	12	718	104	<b>719</b>	<b>104</b>	721	104	12	721	104	<b>716</b>	<b>105</b>	716	105
473.astar	12	765	110	<b>768</b>	<b>110</b>	769	110	12	<b>635</b>	<b>133</b>	636	133	635	133
483.xalancbmk	12	436	190	<b>436</b>	<b>190</b>	435	190	12	420	197	411	202	<b>412</b>	<b>201</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit  
The libhugetlbfs libraries were installed using the  
installation rpms that came with the distribution.

```
Set vm/nr_hugepages=5400 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

## General Notes

Environment variables set by runspec before the start of the run:  
HUGETLB\_LIMIT = "450"  
LD\_LIBRARY\_PATH = "//cpu2006/amd0905is-libs/64://cpu2006/amd0905is-libs/32"  
PGI\_HUGE\_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>.



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint\_rate2006 = 204

Proliant DL165 G6  
(2.6 GHz AMD Opteron 2435)

SPECint\_rate\_base2006 = 160

CPU2006 license: 3

Test date: May-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2009

Tested by: Hewlett-Packard Company

Software Availability: Apr-2009

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmcr: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-march=barcelona -Ofast -CG:local\_sched\_alg=1 -HP:bdt=2m:heap=2m

C++ benchmarks:  
-march=barcelona -Ofast -m32 -INLINE:aggressive=on  
-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

## Peak Compiler Invocation

C benchmarks (except as noted below):  
opencc

456.hmmcr: pgcc

C++ benchmarks (except as noted below):  
openCC

473.astar: pgcpp



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint\_rate2006 = 204

Proliant DL165 G6  
(2.6 GHz AMD Opteron 2435)

SPECint\_rate\_base2006 = 160

CPU2006 license: 3

Test date: May-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2009

Tested by: Hewlett-Packard Company

Software Availability: Apr-2009

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalanbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
               -OPT:unroll_times_max=8 -OPT:unroll_size=256
               -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
               -CG:local_sched_alg=1 -CG:unroll_fb_req=on
               -HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -fb_create fbdata(pass 1)
           -fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
           -OPT:unroll_size=0 -OPT:Ofast -OPT:goto=off
           -INLINE:aggressive=on -CG:local_sched_alg=1 -m3dnw
           -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
         -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
         -LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
         -HP:bdt=2m:heap=2m -GRA:unspill=on

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
         -CG:gcm=off -GRA:prioritize_by_density=on -m32
         -HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
           -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
           -OPT:unroll_times_max=8 -OPT:unroll_size=256
           -OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
           -IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
           -LNO:ignore_feedback=off -CG:p2align=on
           -CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -fastsse -Mvect=partial -Munroll=n:8 -Msmartalloc=huge
           -Msafeptr -Mprefetch=t0 -Mfprelaxed -Mipa=const -Mipa=ptr
           -Mipa=arg -Mipa=inline -tp shanghai-64 -Bstatic_pgi

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint\_rate2006 = 204

Proliant DL165 G6  
(2.6 GHz AMD Opteron 2435)

SPECint\_rate\_base2006 = 160

CPU2006 license: 3

Test date: May-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2009

Tested by: Hewlett-Packard Company

Software Availability: Apr-2009

## Peak Optimization Flags (Continued)

458.sjeng: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -ipa -LNO:ignore\_feedback=off  
-LNO:full\_unroll=10 -LNO:fusion=0 -LNO:fission=2  
-IPA:pu\_reorder=2 -CG:ptr\_load\_use=0  
-OPT:unroll\_times\_max=8 -INLINE:aggressive=on  
-HP:bdt=2m:heap=2m

462.libquantum: -march=barcelona -Ofast -LNO:pf2=0 -CG:gcm=off  
-CG:use\_prefetchnta=on -CG:cmp\_peep=on -WOPT:aggstr=0  
-HP:bdt=2m:heap=2m -OPT:alias=disjoint  
-INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000

464.h264ref: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -IPA:plimit=20000  
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr\_load\_use=0  
-CG:push\_pop\_int\_saved\_regs=off -HP:bdt=2m:heap=2m

C++ benchmarks:

471.omnetpp: -march=barcelona -Ofast -CG:gcm=off -INLINE:aggressive=on  
-OPT:alias=disjoint -WOPT:if\_conv=0 -m32  
-L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)  
-Mipa=inline:6(pass 2) -fastsse -O4 -Msmartalloc=huge  
-Msafeptr=global -Mfprelaxed --zc\_eh -tp shanghai-32  
-Bstatic\_pgi

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32  
-CG:cmp\_peep=on -GRA:unspill=on -TENV:frame\_pointer=off  
-L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

## Peak Other Flags

C benchmarks:

456.hmmmer: -Mipa=jobs:4

C++ benchmarks:

473.astar: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.00.html>

[http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.20090710.html](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.html)

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags.html>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 204**

Proliant DL165 G6  
(2.6 GHz AMD Opteron 2435)

**SPECint\_rate\_base2006 = 160**

**CPU2006 license:** 3

**Test date:** May-2009

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2009

**Tested by:** Hewlett-Packard Company

**Software Availability:** Apr-2009

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.00.xml>  
[http://www.spec.org/cpu2006/flags/pg180\\_linux\\_flags.20090710.xml](http://www.spec.org/cpu2006/flags/pg180_linux_flags.20090710.xml)  
<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 00:14:09 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 10 June 2009.