



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

### SPECint®\_rate2006 = 395

ProLiant BL685c G6  
(2.6 GHz AMD Opteron 8435)

### SPECint\_rate\_base2006 = 310

CPU2006 license: 3


Test date: May-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2009

Tested by: Hewlett-Packard Company

Software Availability: Apr-2009

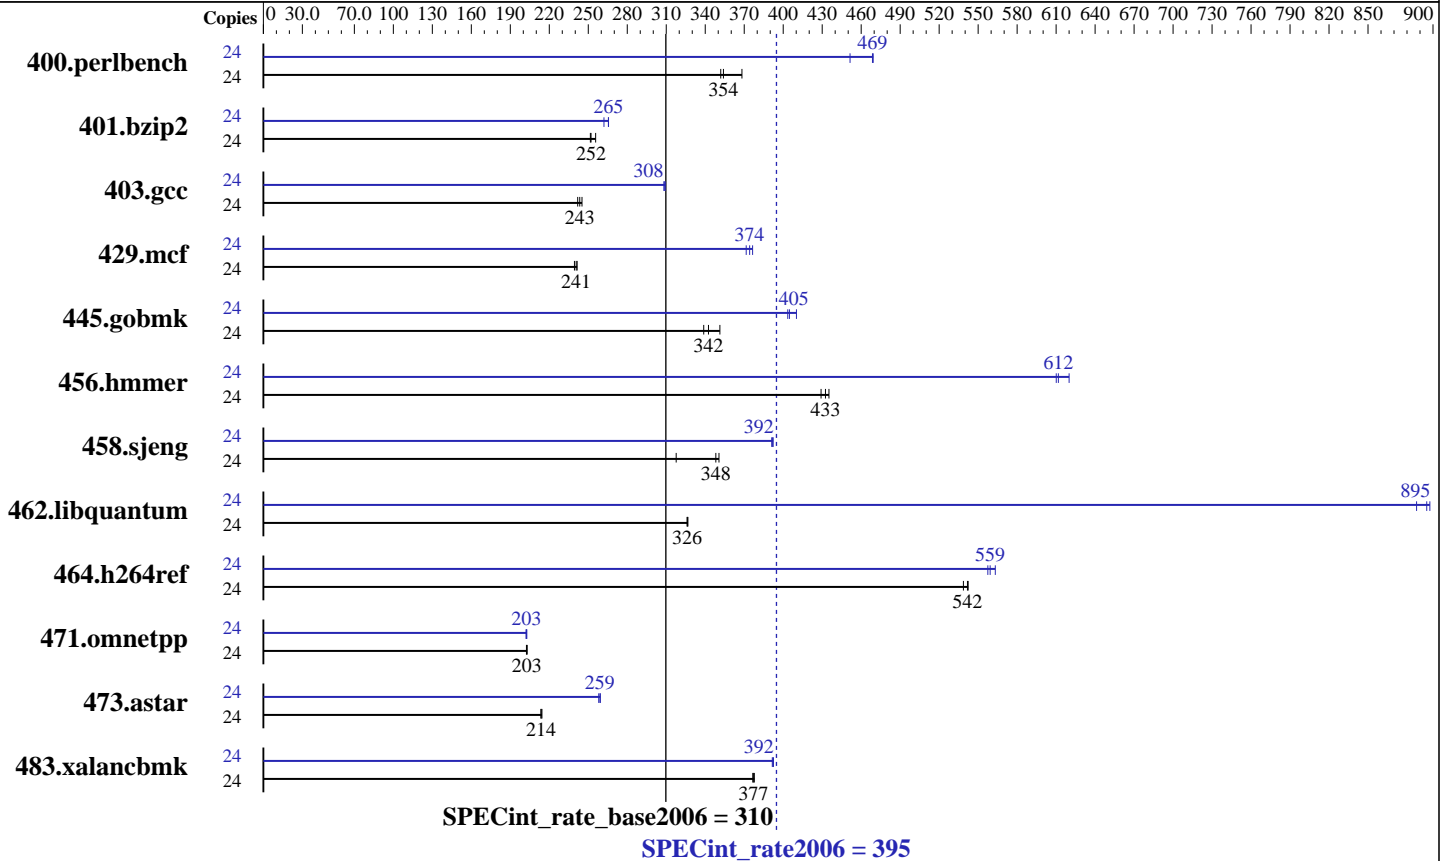

### Hardware

CPU Name: AMD Opteron 8435  
 CPU Characteristics: 2600  
 CPU MHz: Integrated  
 FPU: 24 cores, 4 chips, 6 cores/chip  
 CPU(s) enabled: 2,4 chips  
 CPU(s) orderable: 64 KB I + 64 KB D on chip per core  
 Primary Cache: 512 KB I+D on chip per core  
 Secondary Cache: 6 MB I+D on chip per chip  
 L3 Cache: None  
 Other Cache: 64 GB (16x4 GB, PC2-6400P CL5)  
 Memory: 2x146 GB 10 K SAS  
 Disk Subsystem: None  
 Other Hardware:

### Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Advanced Platform, Kernel 2.6.18-128.el5  
 Compiler: PGI Server Complete Version 8.0  
 x86 Open64 4.2.2 Compiler Suite  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: binutils 2.18  
 SmartHeap 8.1 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL685c G6  
(2.6 GHz AMD Opteron 8435)

SPECint\_rate2006 = 395

SPECint\_rate\_base2006 = 310

CPU2006 license: 3  
Test sponsor: Hewlett-Packard Company  
Tested by: Hewlett-Packard Company

Test date: May-2009  
Hardware Availability: Jun-2009  
Software Availability: Apr-2009

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	637	368	666	352	<b>662</b>	<b>354</b>	24	519	451	<b>500</b>	<b>469</b>	500	469
401.bzip2	24	906	256	920	252	<b>919</b>	<b>252</b>	24	884	262	872	266	<b>872</b>	<b>265</b>
403.gcc	24	799	242	788	245	<b>794</b>	<b>243</b>	24	<b>626</b>	<b>308</b>	625	309	627	308
429.mcf	24	907	241	914	239	<b>909</b>	<b>241</b>	24	<b>585</b>	<b>374</b>	589	372	581	376
445.gobmk	24	743	339	717	351	<b>735</b>	<b>342</b>	24	<b>622</b>	<b>405</b>	614	410	624	403
456.hammer	24	<b>518</b>	<b>433</b>	515	435	522	429	24	361	620	<b>366</b>	<b>612</b>	367	610
458.sjeng	24	914	318	828	351	<b>834</b>	<b>348</b>	24	<b>741</b>	<b>392</b>	742	391	740	392
462.libquantum	24	1522	327	<b>1525</b>	<b>326</b>	1525	326	24	<b>556</b>	<b>895</b>	560	887	554	898
464.h264ref	24	986	539	<b>980</b>	<b>542</b>	979	542	24	953	557	943	563	<b>950</b>	<b>559</b>
471.omnetpp	24	<b>740</b>	<b>203</b>	739	203	741	202	24	742	202	<b>741</b>	<b>203</b>	740	203
473.astar	24	786	214	<b>788</b>	<b>214</b>	789	214	24	653	258	650	259	<b>651</b>	<b>259</b>
483.xalancbmk	24	<b>439</b>	<b>377</b>	438	378	440	377	24	423	392	<b>422</b>	<b>392</b>	422	392

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit  
The libhugetlbfs libraries were installed using the  
installation rpms that came with the distribution.

```
Set vm/nr_hugepages=10800 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

## Platform Notes

BIOS configuration:  
Power Regulator set to Static High Performance Mode

## General Notes

Environment variables set by runspec before the start of the run:  
HUGETLB\_LIMIT = "450"  
LD\_LIBRARY\_PATH = "/cpu2006/amd0905is-libs/64:/cpu2006/amd0905is-libs/32"  
PGI\_HUGE\_PAGES = "450"

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 395**

ProLiant BL685c G6  
(2.6 GHz AMD Opteron 8435)

**SPECint\_rate\_base2006 = 310**

**CPU2006 license:** 3

**Test date:** May-2009

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2009

**Tested by:** Hewlett-Packard Company

**Software Availability:** Apr-2009

## General Notes (Continued)

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>.

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-march=barcelona -Ofast -CG:local\_sched\_alg=1 -HP:bdt=2m:heap=2m

C++ benchmarks:  
-march=barcelona -Ofast -m32 -INLINE:aggressive=on  
-L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

## Peak Compiler Invocation

C benchmarks (except as noted below):  
opencc

456.hmmer: pgcc

C++ benchmarks (except as noted below):  
openCC

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint\_rate2006 = 395

ProLiant BL685c G6  
(2.6 GHz AMD Opteron 8435)

SPECint\_rate\_base2006 = 310

CPU2006 license: 3

Test date: May-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2009

Tested by: Hewlett-Packard Company

Software Availability: Apr-2009

## Peak Compiler Invocation (Continued)

473.astar: pgcpp

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
               -OPT:unroll_times_max=8 -OPT:unroll_size=256
               -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
               -CG:local_sched_alg=1 -CG:unroll_fb_req=on
               -HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -fb_create fbdata(pass 1)
           -fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
           -OPT:unroll_size=0 -OPT:Ofast -OPT:goto=off
           -INLINE:aggressive=on -CG:local_sched_alg=1 -m3dnw
           -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
         -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
         -LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
         -HP:bdt=2m:heap=2m -GRA:unspill=on

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
         -CG:gcm=off -GRA:prioritize_by_density=on -m32
         -HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
           -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
           -OPT:unroll_times_max=8 -OPT:unroll_size=256
           -OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
           -IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
           -LNO:ignore_feedback=off -CG:p2align=on
           -CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint\_rate2006 = 395

ProLiant BL685c G6  
(2.6 GHz AMD Opteron 8435)

SPECint\_rate\_base2006 = 310

CPU2006 license: 3

Test date: May-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2009

Tested by: Hewlett-Packard Company

Software Availability: Apr-2009

## Peak Optimization Flags (Continued)

456.hmmr: -fastsse -Mvect=partial -Munroll=n:8 -Msmartalloc=huge  
-Msafeptr -Mprefetch=t0 -Mfprelaxed -Mipa=const -Mipa=ptr  
-Mipa=arg -Mipa=inline -tp shanghai-64 -Bstatic\_pgi

458.sjeng: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -ipa -LNO:ignore\_feedback=off  
-LNO:full\_unroll=10 -LNO:fusion=0 -LNO:fission=2  
-IPA:pu\_reorder=2 -CG:ptr\_load\_use=0  
-OPT:unroll\_times\_max=8 -INLINE:aggressive=on  
-HP:bdtdt=2m:heap=2m

462.libquantum: -march=barcelona -Ofast -LNO:pf2=0 -CG:gcm=off  
-CG:use\_prefetchnta=on -CG:cmp\_peep=on -WOPT:aggstr=0  
-HP:bdtdt=2m:heap=2m -OPT:alias=disjoint  
-INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000

464.h264ref: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -IPA:plimit=20000  
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr\_load\_use=0  
-CG:push\_pop\_int\_saved\_regs=off -HP:bdtdt=2m:heap=2m

C++ benchmarks:

471.omnetpp: -march=barcelona -Ofast -CG:gcm=off -INLINE:aggressive=on  
-OPT:alias=disjoint -WOPT:if\_conv=0 -m32  
-L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

473.astar: -Mphi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)  
-Mipa=inline:6(pass 2) -fastsse -O4 -Msmartalloc=huge  
-Msafeptr=global -Mfprelaxed --zc\_eh -tp shanghai-32  
-Bstatic\_pgi

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32  
-CG:cmp\_peep=on -GRA:unspill=on -TENV:frame\_pointer=off  
-L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

## Peak Other Flags

C benchmarks:

456.hmmr: -Mipa=jobs:4

C++ benchmarks:

473.astar: -Mipa=jobs:4(pass 2)



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL685c G6  
(2.6 GHz AMD Opteron 8435)

**SPECint\_rate2006 = 395**

**SPECint\_rate\_base2006 = 310**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** May-2009

**Hardware Availability:** Jun-2009

**Software Availability:** Apr-2009

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.00.html>  
[http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.20090710.html](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.html)  
<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.00.xml>  
[http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.20090710.xml](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.xml)  
<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 00:09:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 10 June 2009.