



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp®_rate2006 = 142

Proliant DL165 G6
(2.6 GHz AMD Opteron 2435)

SPECfp_rate_base2006 = 129

CPU2006 license: 3


Test date: May-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2009

Tested by: Hewlett-Packard Company

Software Availability: Apr-2009

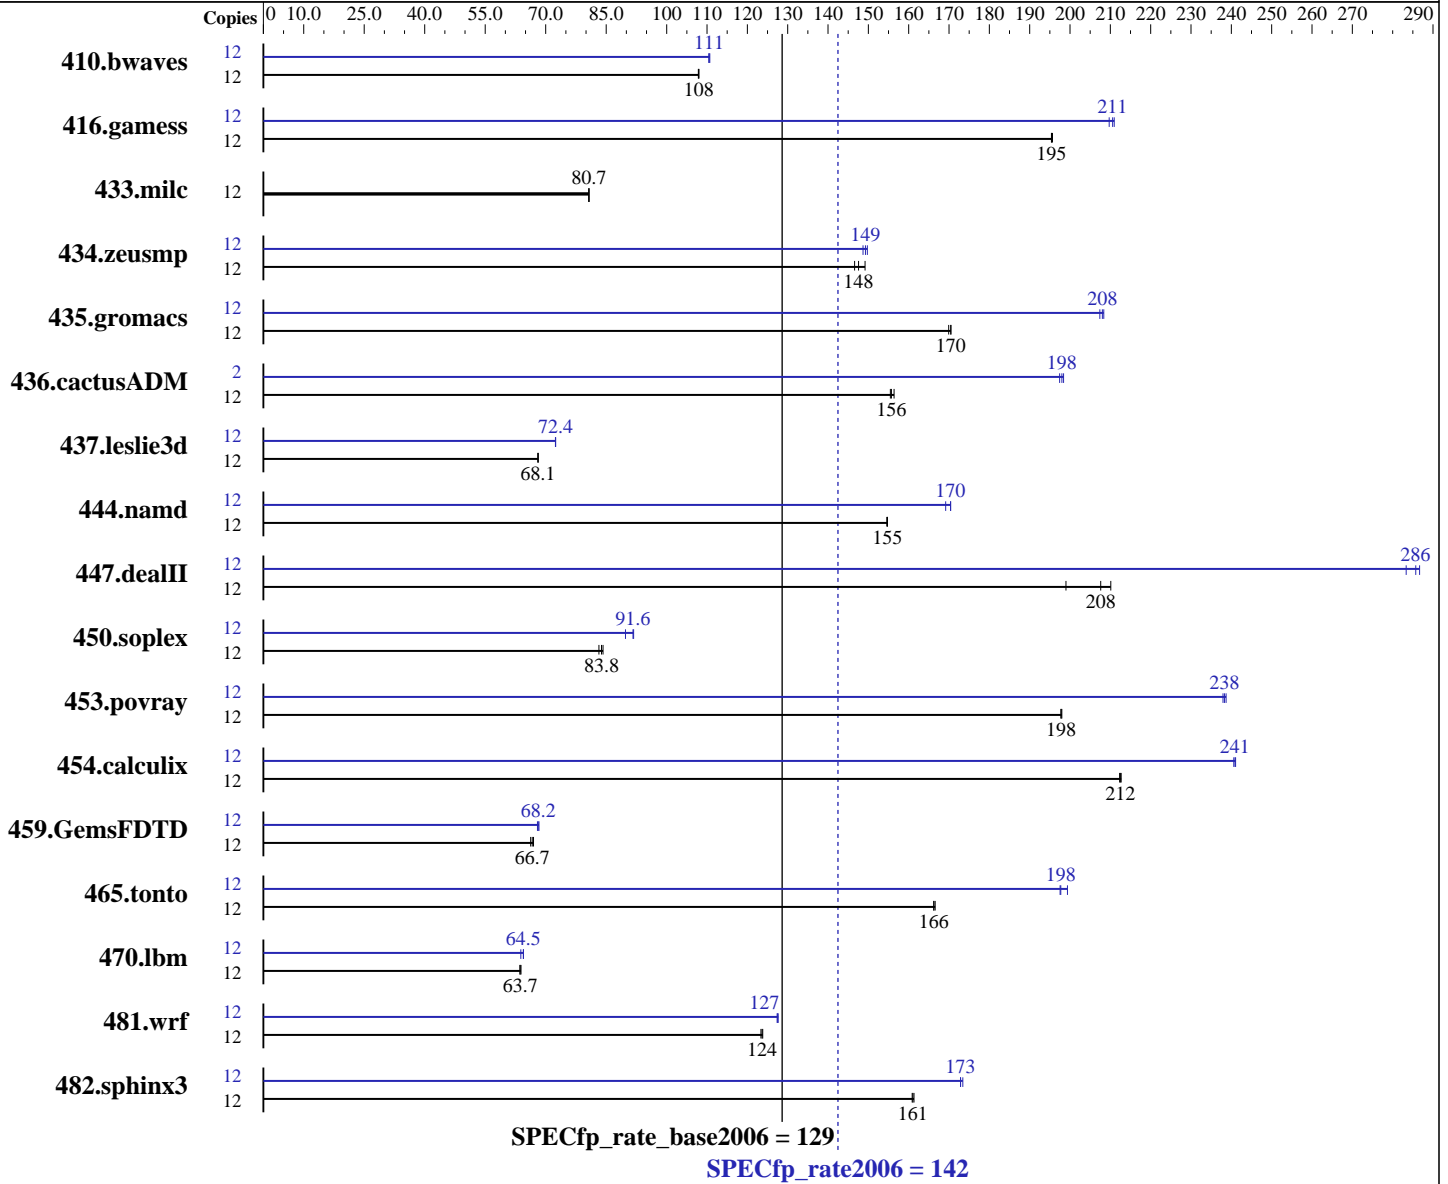

Hardware

CPU Name: AMD Opteron 2435
 CPU Characteristics:
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Advanced Platform, Kernel 2.6.18-128.el5
 Compiler: PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 142

Proliant DL165 G6
(2.6 GHz AMD Opteron 2435)

SPECfp_rate_base2006 = 129

CPU2006 license: 3	Test date: May-2009
Test sponsor: Hewlett-Packard Company	Hardware Availability: Jun-2009
Tested by: Hewlett-Packard Company	Software Availability: Apr-2009

L3 Cache: 6 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (8x4 GB, PC2-6400P CL5)
 Disk Subsystem: 1 x 500 GB 5.4 K RPM SATA
 Other Hardware: None

Other Software: binutils 2.18

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	1512	108	<u>1511</u>	<u>108</u>	1510	108	12	<u>1475</u>	<u>111</u>	1473	111	1477	110
416.gamess	12	1201	196	<u>1202</u>	<u>195</u>	1202	195	12	<u>1116</u>	<u>211</u>	1114	211	1120	210
433.milc	12	1365	80.7	<u>1365</u>	<u>80.7</u>	1365	80.7	12	1365	80.7	<u>1365</u>	<u>80.7</u>	1365	80.7
434.zeusmp	12	745	147	732	149	<u>740</u>	<u>148</u>	12	<u>732</u>	<u>149</u>	729	150	734	149
435.gromacs	12	504	170	<u>503</u>	<u>170</u>	503	170	12	411	208	413	207	<u>412</u>	<u>208</u>
436.cactusADM	12	917	156	<u>921</u>	<u>156</u>	922	155	2	121	197	<u>121</u>	<u>198</u>	120	198
437.leslie3d	12	<u>1656</u>	<u>68.1</u>	1656	68.1	1657	68.1	12	1557	72.5	<u>1557</u>	<u>72.4</u>	1558	72.4
444.namd	12	623	155	<u>622</u>	<u>155</u>	622	155	12	569	169	<u>565</u>	<u>170</u>	565	170
447.dealII	12	653	210	690	199	<u>661</u>	<u>208</u>	12	484	283	<u>480</u>	<u>286</u>	479	287
450.soplex	12	1203	83.2	<u>1194</u>	<u>83.8</u>	1188	84.2	12	1115	89.8	<u>1092</u>	<u>91.6</u>	1090	91.8
453.povray	12	<u>323</u>	<u>198</u>	323	198	322	198	12	268	238	267	239	<u>268</u>	<u>238</u>
454.calculix	12	466	212	465	213	<u>466</u>	<u>212</u>	12	<u>411</u>	<u>241</u>	411	241	411	241
459.GemsFDTD	12	1921	66.3	1901	67.0	<u>1910</u>	<u>66.7</u>	12	<u>1868</u>	<u>68.2</u>	1863	68.3	1874	68.0
465.tonto	12	<u>710</u>	<u>166</u>	709	167	710	166	12	592	199	598	198	<u>597</u>	<u>198</u>
470.lbm	12	<u>2590</u>	<u>63.7</u>	2581	63.9	2592	63.6	12	<u>2558</u>	<u>64.5</u>	2583	63.8	2557	64.5
481.wrf	12	<u>1084</u>	<u>124</u>	1087	123	1083	124	12	<u>1052</u>	<u>127</u>	1050	128	1052	127
482.sphinx3	12	1454	161	1450	161	<u>1452</u>	<u>161</u>	12	<u>1353</u>	<u>173</u>	1349	173	1353	173

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
 'ulimit -l 2097152' was used to set environment locked pages in memory limit
 The libhugetlbfs libraries were installed using the
 installation rpms that came with the distribution.

```
Set vm/nr_hugepages=5400 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 142

Proliant DL165 G6
(2.6 GHz AMD Opteron 2435)

SPECfp_rate_base2006 = 129

CPU2006 license: 3

Test date: May-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2009

Tested by: Hewlett-Packard Company

Software Availability: Apr-2009

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "450"

LD_LIBRARY_PATH = "//cpu2006/amd0905is-libs/64://cpu2006/amd0905is-libs/32"

NCPUS = "6"

PGI_HUGE_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>.

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 142

Proliant DL165 G6
(2.6 GHz AMD Opteron 2435)

SPECfp_rate_base2006 = 129

CPU2006 license: 3

Test date: May-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2009

Tested by: Hewlett-Packard Company

Software Availability: Apr-2009

Base Optimization Flags

C benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline
-tp shanghai-64 -Bstatic_pgi

C++ benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed --zc_eh -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

Fortran benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mvect=short -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

Benchmarks using both Fortran and C:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline
-tp shanghai-64 -Mvect=short -Bstatic_pgi

Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Fortran benchmarks:

-Mipa=jobs:4

Benchmarks using both Fortran and C:

-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks (except as noted below):

openCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):

openf95

410.bwaves: pgf95

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 142

Proliant DL165 G6
(2.6 GHz AMD Opteron 2435)

SPECfp_rate_base2006 = 129

CPU2006 license: 3

Test date: May-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2009

Tested by: Hewlett-Packard Company

Software Availability: Apr-2009

Peak Compiler Invocation (Continued)

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

435.gromacs: opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64
 436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -Mnomain
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -fastsse -Msmartalloc=huge -Mprefetch=t0 -Mloop32
-Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64
-Bstatic_pgi

482.sphinx3: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mfprelaxed -Msmartalloc -tp shanghai-64 -Bstatic_pgi

C++ benchmarks:

444.namd: -Mphi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -fastsse -Munroll=n:4 -Munroll=m:8
-Msmartalloc=huge -Mnodepchk -Mfprelaxed --zc_eh
-tp shanghai-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 142

Proliant DL165 G6
(2.6 GHz AMD Opteron 2435)

SPECfp_rate_base2006 = 129

CPU2006 license: 3

Test date: May-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2009

Tested by: Hewlett-Packard Company

Software Availability: Apr-2009

Peak Optimization Flags (Continued)

447.dealll: -march=barcelona -Ofast -static -INLINE:aggressive=on
-LNO:opt=0 -Wf,-fno-exceptions -m32 -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
-GRA:unspill=on -CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
-CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on
-HP:bdt=2m:heap=2m

Fortran benchmarks:

410.bwaves: -fastsse -Msmartalloc -Mprefetch=nta -Mfprelaxed
-Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256 -HP:bdt=2m:heap=2m

434.zeusmp: -fastsse -Mfprelaxed -Mprefetch=distance:8 -Mprefetch=t0
-Msmartalloc=huge -Msmartalloc=hugebss -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

437.leslie3d: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mvect=fuse -Msmartalloc=huge -Mprefetch=distance:8
-Mprefetch=t0 -Mfprelaxed -tp shanghai-64 -Bstatic_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -HP

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m

436.cactusADM: -fastsse -Mconcur -Msmartalloc=huge -Mfprelaxed -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

454.calculix: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mvect=short -Msmartalloc=huge -Mprefetch=t0 -Mpre

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 142

Proliant DL165 G6
(2.6 GHz AMD Opteron 2435)

SPECfp_rate_base2006 = 129

CPU2006 license: 3

Test date: May-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2009

Tested by: Hewlett-Packard Company

Software Availability: Apr-2009

Peak Optimization Flags (Continued)

454.calculix (continued):

-Mfprelaxed -tp shanghai-64 -Bstatic_pgi

481.wrf: -fastsse -Mvect=noaltcode -Msmartalloc=huge

-Mprefetch=distance:8 -Mfprelaxed -tp shanghai-64

-Bstatic_pgi

Peak Other Flags

C benchmarks:

-Mipa=jobs:4(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks:

410.bwaves: -Mipa=jobs:4

434.zeusmp: -Mipa=jobs:4

437.leslie3d: -Mipa=jobs:4(pass 2)

Benchmarks using both Fortran and C:

436.cactusADM: -Mipa=jobs:4

454.calculix: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.00.html>

http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.html

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.00.xml>

http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.xml

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

Proliant DL165 G6
(2.6 GHz AMD Opteron 2435)

SPECfp_rate2006 = 142

SPECfp_rate_base2006 = 129

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: May-2009
Hardware Availability: Jun-2009
Software Availability: Apr-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 00:10:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 10 June 2009.