



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

### SPECfp<sup>®</sup>\_rate2006 = 71.6

ProLiant DL385 G6  
(2.6 GHz AMD Opteron 2435)

### SPECfp\_rate\_base2006 = 64.7

CPU2006 license: 3


Test date: Jun-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2009

Tested by: Hewlett-Packard Company

Software Availability: Apr-2009

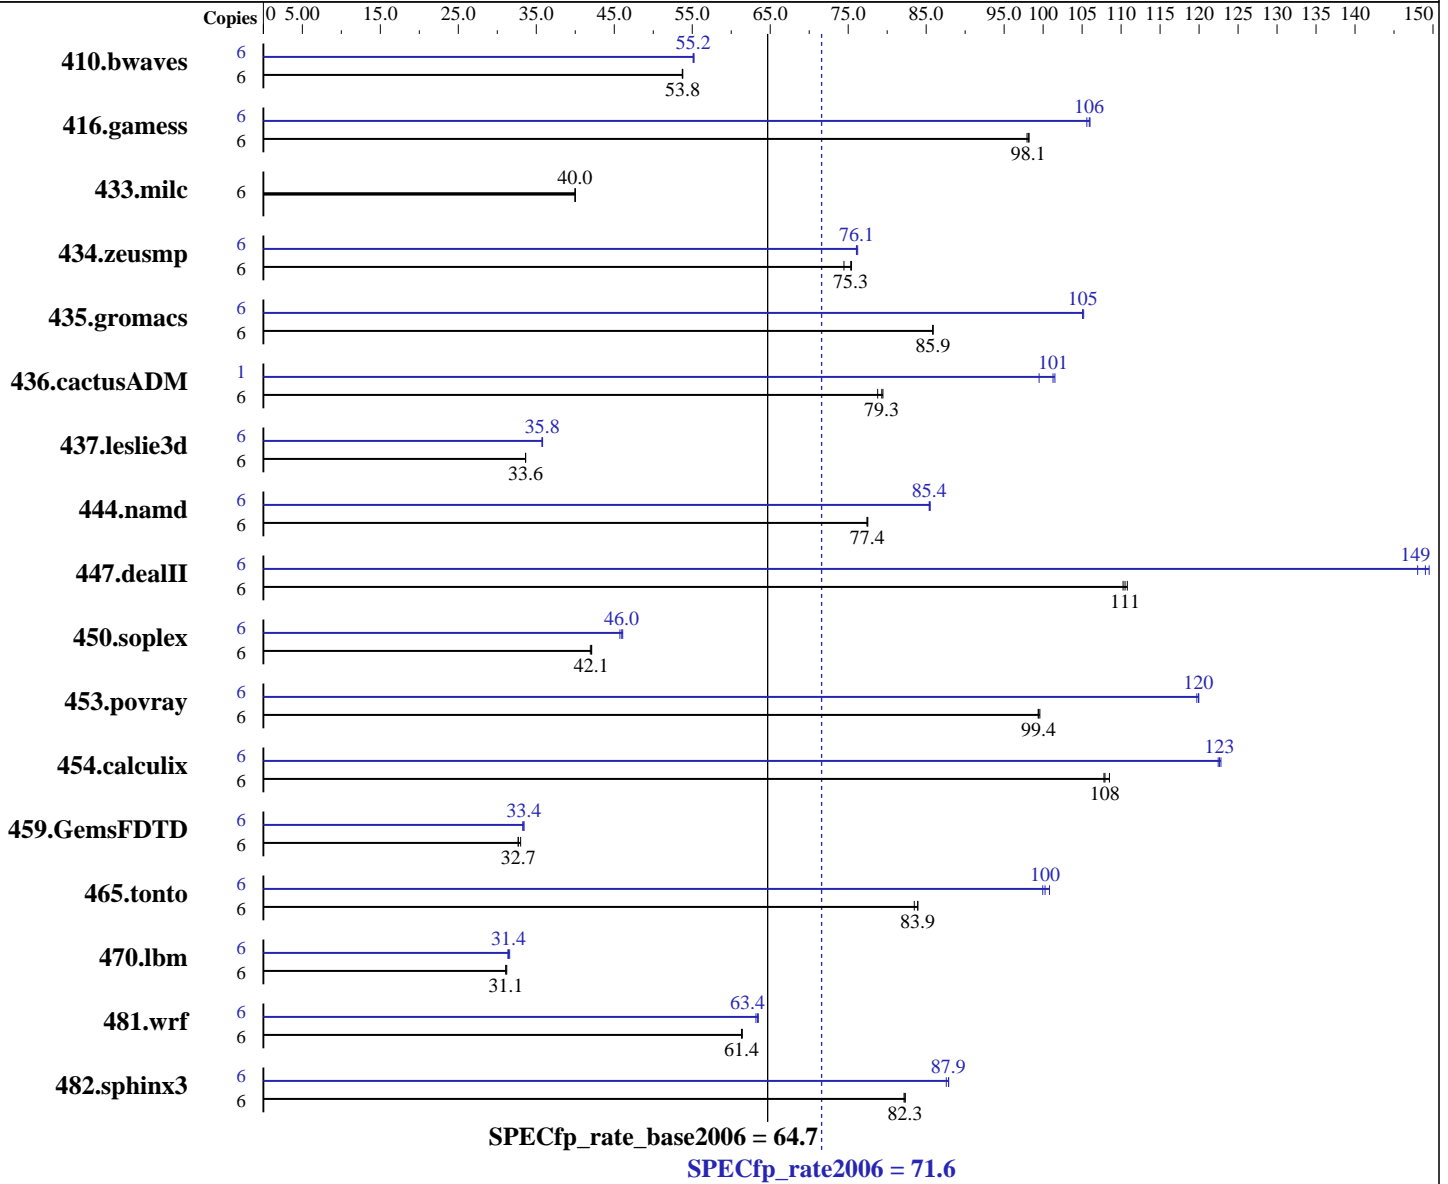

### Hardware

CPU Name: AMD Opteron 2435  
 CPU Characteristics: 2600  
 CPU MHz: Integrated  
 FPU: 6 cores, 1 chip, 6 cores/chip  
 CPU(s) enabled: 1,2 chips  
 CPU(s) orderable: 64 KB I + 64 KB D on chip per core  
 Primary Cache: 512 KB I+D on chip per core  
 Secondary Cache:

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5  
 Compiler: PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp\_rate2006 = 71.6

ProLiant DL385 G6  
(2.6 GHz AMD Opteron 2435)

SPECfp\_rate\_base2006 = 64.7

CPU2006 license: 3  
Test sponsor: Hewlett-Packard Company  
Tested by: Hewlett-Packard Company

Test date: Jun-2009  
Hardware Availability: Jun-2009  
Software Availability: Apr-2009

L3 Cache: 6 MB I+D on chip per chip  
Other Cache: None  
Memory: 16 GB (4x4 GB, PC2-6400P CL5)  
Disk Subsystem: 1 x 120 GB SFF SATA, 5400 RPM  
Other Hardware: None

Other Software: binutils 2.18

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	6	1516	53.8	1518	53.7	<b><u>1516</u></b>	<b><u>53.8</u></b>	6	<b><u>1478</u></b>	<b><u>55.2</u></b>	1476	55.2	1479	55.1
416.gamess	6	1196	98.2	1200	97.9	<b><u>1197</u></b>	<b><u>98.1</u></b>	6	1108	106	1112	106	<b><u>1109</u></b>	<b><u>106</u></b>
433.milc	6	<b><u>1378</u></b>	<b><u>40.0</u></b>	1378	40.0	1377	40.0	6	<b><u>1378</u></b>	<b><u>40.0</u></b>	1378	40.0	1377	40.0
434.zeusmp	6	724	75.4	733	74.5	<b><u>725</u></b>	<b><u>75.3</u></b>	6	<b><u>718</u></b>	<b><u>76.1</u></b>	718	76.1	716	76.2
435.gromacs	6	<b><u>499</u></b>	<b><u>85.9</u></b>	499	85.9	499	85.8	6	407	105	408	105	<b><u>408</u></b>	<b><u>105</u></b>
436.cactusADM	6	902	79.5	<b><u>904</u></b>	<b><u>79.3</u></b>	910	78.8	1	<b><u>118</u></b>	<b><u>101</u></b>	120	99.5	118	102
437.leslie3d	6	1677	33.6	<b><u>1677</u></b>	<b><u>33.6</u></b>	1677	33.6	6	1578	35.7	1575	35.8	<b><u>1577</u></b>	<b><u>35.8</u></b>
444.namd	6	621	77.5	622	77.4	<b><u>621</u></b>	<b><u>77.4</u></b>	6	563	85.4	563	85.5	<b><u>563</u></b>	<b><u>85.4</u></b>
447.dealII	6	623	110	620	111	<b><u>621</u></b>	<b><u>111</u></b>	6	<b><u>461</u></b>	<b><u>149</u></b>	464	148	459	150
450.soplex	6	1193	41.9	<b><u>1189</u></b>	<b><u>42.1</u></b>	1188	42.1	6	1094	45.7	1086	46.1	<b><u>1089</u></b>	<b><u>46.0</u></b>
453.povray	6	<b><u>321</u></b>	<b><u>99.4</u></b>	321	99.4	321	99.6	6	267	120	266	120	<b><u>266</u></b>	<b><u>120</u></b>
454.calculix	6	456	109	459	108	<b><u>459</u></b>	<b><u>108</u></b>	6	403	123	404	122	<b><u>404</u></b>	<b><u>123</u></b>
459.GemsFDTD	6	<b><u>1948</u></b>	<b><u>32.7</u></b>	1948	32.7	1929	33.0	6	1914	33.3	<b><u>1906</u></b>	<b><u>33.4</u></b>	1905	33.4
465.tonto	6	<b><u>704</u></b>	<b><u>83.9</u></b>	707	83.5	703	83.9	6	586	101	591	99.9	<b><u>589</u></b>	<b><u>100</u></b>
470.lbm	6	2652	31.1	2641	31.2	<b><u>2649</u></b>	<b><u>31.1</u></b>	6	<b><u>2622</u></b>	<b><u>31.4</u></b>	2610	31.6	2629	31.4
481.wrf	6	<b><u>1092</u></b>	<b><u>61.4</u></b>	1091	61.4	1093	61.3	6	1061	63.2	1056	63.5	<b><u>1058</u></b>	<b><u>63.4</u></b>
482.sphinx3	6	1423	82.2	<b><u>1421</u></b>	<b><u>82.3</u></b>	1421	82.3	6	1330	87.9	1335	87.6	<b><u>1331</u></b>	<b><u>87.9</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit  
  
Set vm/nr\_hugepages=2700 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 71.6**

ProLiant DL385 G6  
(2.6 GHz AMD Opteron 2435)

**SPECfp\_rate\_base2006 = 64.7**

**CPU2006 license:** 3  
**Test sponsor:** Hewlett-Packard Company  
**Tested by:** Hewlett-Packard Company

**Test date:** Jun-2009  
**Hardware Availability:** Jun-2009  
**Software Availability:** Apr-2009

## Platform Notes

BIOS configuration:  
Power Regulator set to HP Static High Performance Mode  
Memory channel mode set to Independent

## General Notes

Environment variables set by runspec before the start of the run:  
HUGETLB\_LIMIT = "450"  
LD\_LIBRARY\_PATH = "/cpu2006/amd0905is-libs/64:/cpu2006/amd0905is-libs/32"  
NCPUS = "6"  
PGI\_HUGE\_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>.

## Base Compiler Invocation

C benchmarks:  
pgcc

C++ benchmarks:  
pgcpp

Fortran benchmarks:  
pgf95

Benchmarks using both Fortran and C:  
pgcc pgf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -Mnomain  
436.cactusADM: -DSPEC\_CPU\_LP64 -Mnomain  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -Mnomain  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 71.6**

ProLiant DL385 G6  
(2.6 GHz AMD Opteron 2435)

**SPECfp\_rate\_base2006 = 64.7**

**CPU2006 license:** 3

**Test date:** Jun-2009

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2009

**Tested by:** Hewlett-Packard Company

**Software Availability:** Apr-2009

## Base Portability Flags (Continued)

481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp shanghai-64 -Bstatic\_pgi

C++ benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed --zc\_eh -Mipa=fast  
-Mipa=inline -tp shanghai-64 -Bstatic\_pgi

Fortran benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mvect=short -Mipa=fast  
-Mipa=inline -tp shanghai-64 -Bstatic\_pgi

Benchmarks using both Fortran and C:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp shanghai-64 -Mvect=short -Bstatic\_pgi

## Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Fortran benchmarks:

-Mipa=jobs:4

Benchmarks using both Fortran and C:

-Mipa=jobs:4

## Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks (except as noted below):

openCC

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 71.6**

ProLiant DL385 G6  
(2.6 GHz AMD Opteron 2435)

**SPECfp\_rate\_base2006 = 64.7**

**CPU2006 license:** 3

**Test date:** Jun-2009

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2009

**Tested by:** Hewlett-Packard Company

**Software Availability:** Apr-2009

## Peak Compiler Invocation (Continued)

444.namd: pgcpp

Fortran benchmarks (except as noted below):

openf95

410.bwaves: pgf95

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

435.gromacs: opencc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64

436.cactusADM: -DSPEC\_CPU\_LP64 -Mnomain

437.leslie3d: -DSPEC\_CPU\_LP64

444.namd: -DSPEC\_CPU\_LP64

453.povray: -DSPEC\_CPU\_LP64

454.calculix: -DSPEC\_CPU\_LP64 -Mnomain

459.GemsFDTD: -DSPEC\_CPU\_LP64

465.tonto: -DSPEC\_CPU\_LP64

470.lbm: -DSPEC\_CPU\_LP64

481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -fastsse -Msmartalloc=huge -Mprefetch=t0 -Mloop32  
-Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64  
-Bstatic\_pgi

482.sphinx3: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse  
-Mfprelaxed -Msmartalloc -tp shanghai-64 -Bstatic\_pgi

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

**SPECfp\_rate2006 = 71.6**

ProLiant DL385 G6  
(2.6 GHz AMD Opteron 2435)

**SPECfp\_rate\_base2006 = 64.7**

**CPU2006 license:** 3

**Test date:** Jun-2009

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2009

**Tested by:** Hewlett-Packard Company

**Software Availability:** Apr-2009

## Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -Mphi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)  
 -Mipa=inline(pass 2) -fastsse -Munroll=n:4 -Munroll=m:8  
 -Msmartalloc=huge -Mnodepchk -Mfprelaxed --zc\_eh  
 -tp shanghai-64 -Bstatic\_pgi

447.dealIII: -march=barcelona -Ofast -static -INLINE:aggressive=on  
 -LNO:opt=0 -Wf,-fno-exceptions -m32 -OPT:unroll\_times\_max=8  
 -OPT:unroll\_size=256 -OPT:unroll\_level=2 -HP:bdt=2m:heap=2m  
 -GRA:unspill=on -CG:cmp\_peep=on -TENV:frame\_pointer=off

450.soplex: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -INLINE:aggressive=on  
 -OPT:IEEE\_arith=3 -OPT:IEEE\_NaN\_Inf=off  
 -OPT:fold\_unsigned\_relops=on -OPT:malloc\_alg=1  
 -CG:load\_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on  
 -HP:bdt=2m:heap=2m

Fortran benchmarks:

410.bwaves: -fastsse -Msmartalloc -Mprefetch=nta -Mfprelaxed  
 -Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic\_pgi

416.gamess: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3  
 -OPT:unroll\_size=256 -HP:bdt=2m:heap=2m

434.zeusmp: -fastsse -Mfprelaxed -Mprefetch=distance:8 -Mprefetch=t0  
 -Msmartalloc=huge -Msmartalloc=hugebss -Mipa=fast  
 -Mipa=inline -tp shanghai-64 -Bstatic\_pgi

437.leslie3d: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)  
 -Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse  
 -Mvect=fuse -Msmartalloc=huge -Mprefetch=distance:8  
 -Mprefetch=t0 -Mfprelaxed -tp shanghai-64 -Bstatic\_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2  
 -LNO:prefetch\_ahead=1 -CG:load\_exe=0 -HP

465.tonto: -march=barcelona -Ofast -OPT:alias=no\_f90\_pointer\_alias  
 -LNO:blocking=off -CG:load\_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 71.6**

ProLiant DL385 G6  
(2.6 GHz AMD Opteron 2435)

**SPECfp\_rate\_base2006 = 64.7**

**CPU2006 license:** 3

**Test date:** Jun-2009

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2009

**Tested by:** Hewlett-Packard Company

**Software Availability:** Apr-2009

## Peak Optimization Flags (Continued)

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m

436.cactusADM: -fastsse -Mconcur -Msmartalloc=huge -Mfprelaxed -Mipa=fast  
-Mipa=inline -tp shanghai-64 -Bstatic\_pgi

454.calculix: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse  
-Mvect=short -Msmartalloc=huge -Mprefetch=t0 -Mpre  
-Mfprelaxed -tp shanghai-64 -Bstatic\_pgi

481.wrf: -fastsse -Mvect=noaltcode -Msmartalloc=huge  
-Mprefetch=distance:8 -Mfprelaxed -tp shanghai-64  
-Bstatic\_pgi

## Peak Other Flags

C benchmarks:

-Mipa=jobs:4(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks:

410.bwaves: -Mipa=jobs:4

434.zeusmp: -Mipa=jobs:4

437.leslie3d: -Mipa=jobs:4(pass 2)

Benchmarks using both Fortran and C:

436.cactusADM: -Mipa=jobs:4

454.calculix: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.html](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.html)

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.00.html>

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.xml](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.xml)

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.00.xml>

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL385 G6  
(2.6 GHz AMD Opteron 2435)

SPECfp\_rate2006 = 71.6

SPECfp\_rate\_base2006 = 64.7

**CPU2006 license:** 3  
**Test sponsor:** Hewlett-Packard Company  
**Tested by:** Hewlett-Packard Company

**Test date:** Jun-2009  
**Hardware Availability:** Jun-2009  
**Software Availability:** Apr-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 01:21:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 23 June 2009.