



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

**SPECint®2006 = 28.7**

Intel DQ45CB motherboard (Intel Core 2 Duo E8600)

**SPECint\_base2006 = 26.4**

CPU2006 license: 13


Test date: Apr-2009

Test sponsor: Intel Corporation

Hardware Availability: May-2009

Tested by: Intel Corporation

Software Availability: Nov-2008

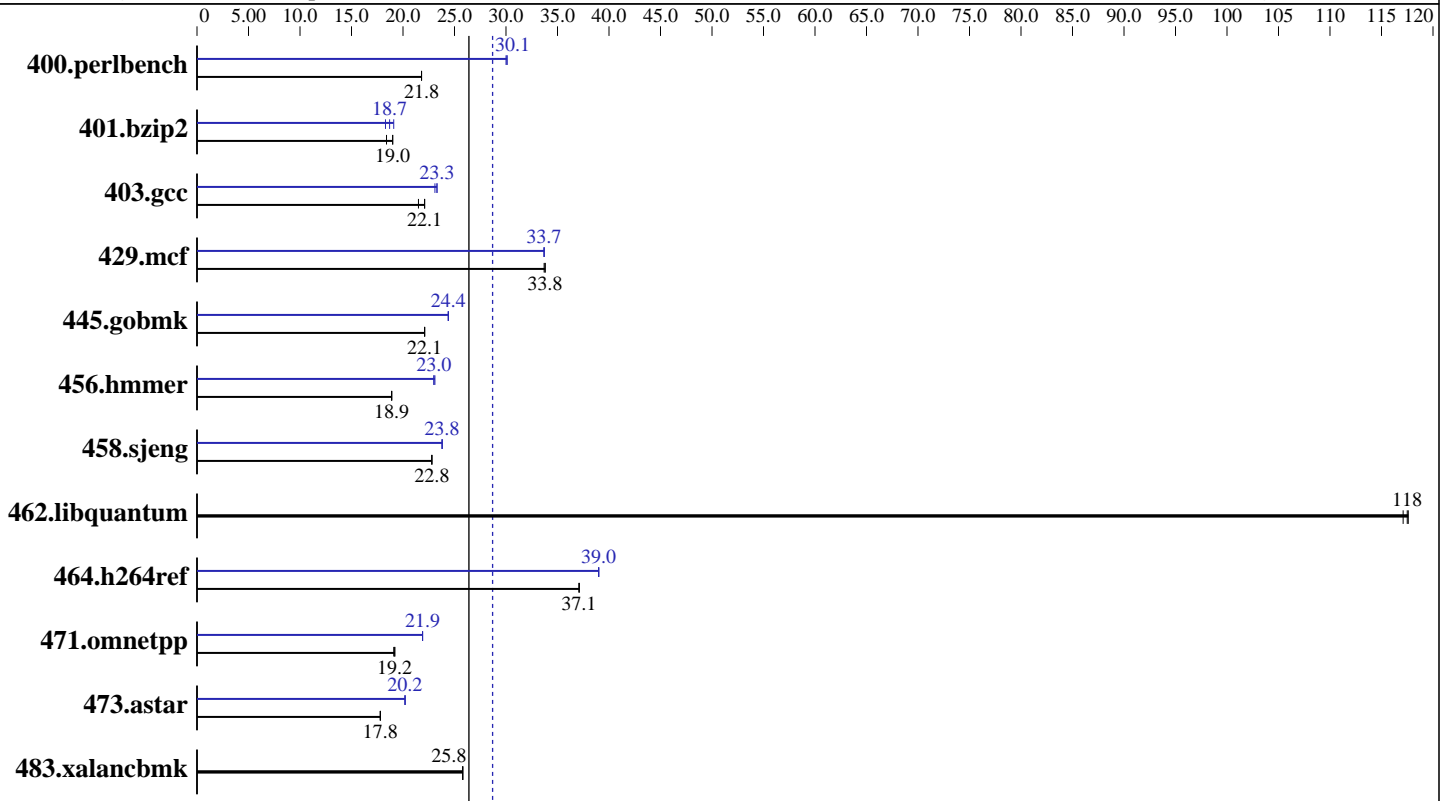

### Hardware

CPU Name: Intel Core 2 Duo E8600  
 CPU Characteristics: 3333  
 CPU MHz: 3333  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 6 MB I+D on chip per chip  
 L3 Cache: None  
 Other Cache: None  
 Memory: 4 GB (4x1GB DDR2-800 CL5)  
 Disk Subsystem: Seagate 320 GB SATA, 7200RPM  
 Other Hardware: None

### Software

Operating System: Windows Vista Ultimate w/ SP1 (64-bit)  
 Compiler: Intel C++ Compiler Professional 11.0 for IA32  
 Build 20080930 Package ID: w\_cproc\_p\_11.0.054  
 Microsoft Visual Studio 2008 (for libraries)  
 Auto Parallel: Yes  
 File System: NTFS  
 System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other Software: SmartHeap Library Version 8.1 from  
<http://www.microquill.com/>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 28.7

Intel DQ45CB motherboard (Intel Core 2 Duo E8600)

SPECint\_base2006 = 26.4

CPU2006 license: 13

Test date: Apr-2009

Test sponsor: Intel Corporation

Hardware Availability: May-2009

Tested by: Intel Corporation

Software Availability: Nov-2008

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	448	21.8	<b>448</b>	<b>21.8</b>	447	21.8	<u>325</u>	<u>30.1</u>	325	30.0	325	30.1
401.bzip2	523	18.4	<b>509</b>	<b>19.0</b>	507	19.0	505	19.1	528	18.3	<u>517</u>	<u>18.7</u>
403.gcc	<b>365</b>	<b>22.1</b>	365	22.1	375	21.5	348	23.1	346	23.3	<b>346</b>	<b>23.3</b>
429.mcf	271	33.7	<b>270</b>	<b>33.8</b>	270	33.8	271	33.7	<b>270</b>	<b>33.7</b>	270	33.7
445.gobmk	475	22.1	475	22.1	<b>475</b>	<b>22.1</b>	430	24.4	<b>431</b>	<b>24.4</b>	431	24.4
456.hammer	494	18.9	<b>494</b>	<b>18.9</b>	493	18.9	<b>405</b>	<b>23.0</b>	405	23.0	405	23.1
458.sjeng	<b>531</b>	<b>22.8</b>	531	22.8	531	22.8	508	23.8	<b>508</b>	<b>23.8</b>	508	23.8
462.libquantum	177	117	<b>176</b>	<b>118</b>	176	118	177	117	<b>176</b>	<b>118</b>	176	118
464.h264ref	597	37.1	<b>597</b>	<b>37.1</b>	597	37.1	568	39.0	<b>568</b>	<b>39.0</b>	568	39.0
471.omnetpp	327	19.1	<b>326</b>	<b>19.2</b>	326	19.2	<b>286</b>	<b>21.9</b>	286	21.9	286	21.9
473.astar	395	17.8	395	17.8	<b>395</b>	<b>17.8</b>	348	20.2	348	20.2	<b>348</b>	<b>20.2</b>
483.xalancbmk	267	25.8	<b>268</b>	<b>25.8</b>	268	25.8	267	25.8	<b>268</b>	<b>25.8</b>	268	25.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

Tested systems can be used with Shin-G ATX case,  
 Antec Truepower Trio power supply TP3-650  
 Binaries were built on Windows Vista Ultimate (32-bit)  
 Binaries were built on Windows Vista Ultimate (32-bit)  
 OMP\_NUM\_THREADS set to number of logical processors as seen by the OS  
 KMP\_AFFINITY set to physical,0

## Base Compiler Invocation

C benchmarks:  
 icl -Qvc9 -Qc99

C++ benchmarks:  
 icl -Qvc9

## Base Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
 464.h264ref: -DSPEC\_CPU\_NO\_INTTYPES -DWIN32  
 483.xalancbmk: -Qoption,cpp,--no\_wchar\_t\_keyword



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 28.7

Intel DQ45CB motherboard (Intel Core 2 Duo E8600)

SPECint\_base2006 = 26.4

CPU2006 license: 13

Test date: Apr-2009

Test sponsor: Intel Corporation

Hardware Availability: May-2009

Tested by: Intel Corporation

Software Availability: Nov-2008

## Base Optimization Flags

C benchmarks:

-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel  
-Qpar-runtime-control -Qvec-guard-write /F512000000

C++ benchmarks:

-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features  
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks:

icl -Qvc9 -Qc99

C++ benchmarks:

icl -Qvc9

## Peak Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
464.h264ref: -DSPEC\_CPU\_NO\_INTTYPES -DWIN32  
483.xalanbmk: -Qoption,cpp,--no\_wchar\_t\_keyword

## Peak Optimization Flags

C benchmarks:

400.perlbench: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

401.bzip2: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias  
/F512000000

403.gcc: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- /F512000000

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 28.7

Intel DQ45CB motherboard (Intel Core 2 Duo E8600)

SPECint\_base2006 = 26.4

CPU2006 license: 13

Test date: Apr-2009

Test sponsor: Intel Corporation

Hardware Availability: May-2009

Tested by: Intel Corporation

Software Availability: Nov-2008

## Peak Optimization Flags (Continued)

429.mcf: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch  
/F512000000

445.gobmk: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmcr: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias  
/F512000000

458.sjeng: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qunroll4 /F512000000

462.libquantum: basepeak = yes

464.h264ref: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qansi-alias  
-Qopt-ra-region-strategy=block /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE

473.astar: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qansi-alias  
-Qopt-ra-region-strategy=routine /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090710.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090710.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 28.7

Intel DQ45CB motherboard (Intel Core 2 Duo E8600)

SPECint\_base2006 = 26.4

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Apr-2009

Hardware Availability: May-2009

Software Availability: Nov-2008

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 01:03:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 23 June 2009.