



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint®2006 = 19.8

Intel DQ45CB motherboard (Intel Pentium E5200)

SPECint_base2006 = 18.2

CPU2006 license: 13


Test date: Apr-2009

Test sponsor: Intel Corporation

Hardware Availability: May-2009

Tested by: Intel Corporation

Software Availability: Nov-2008

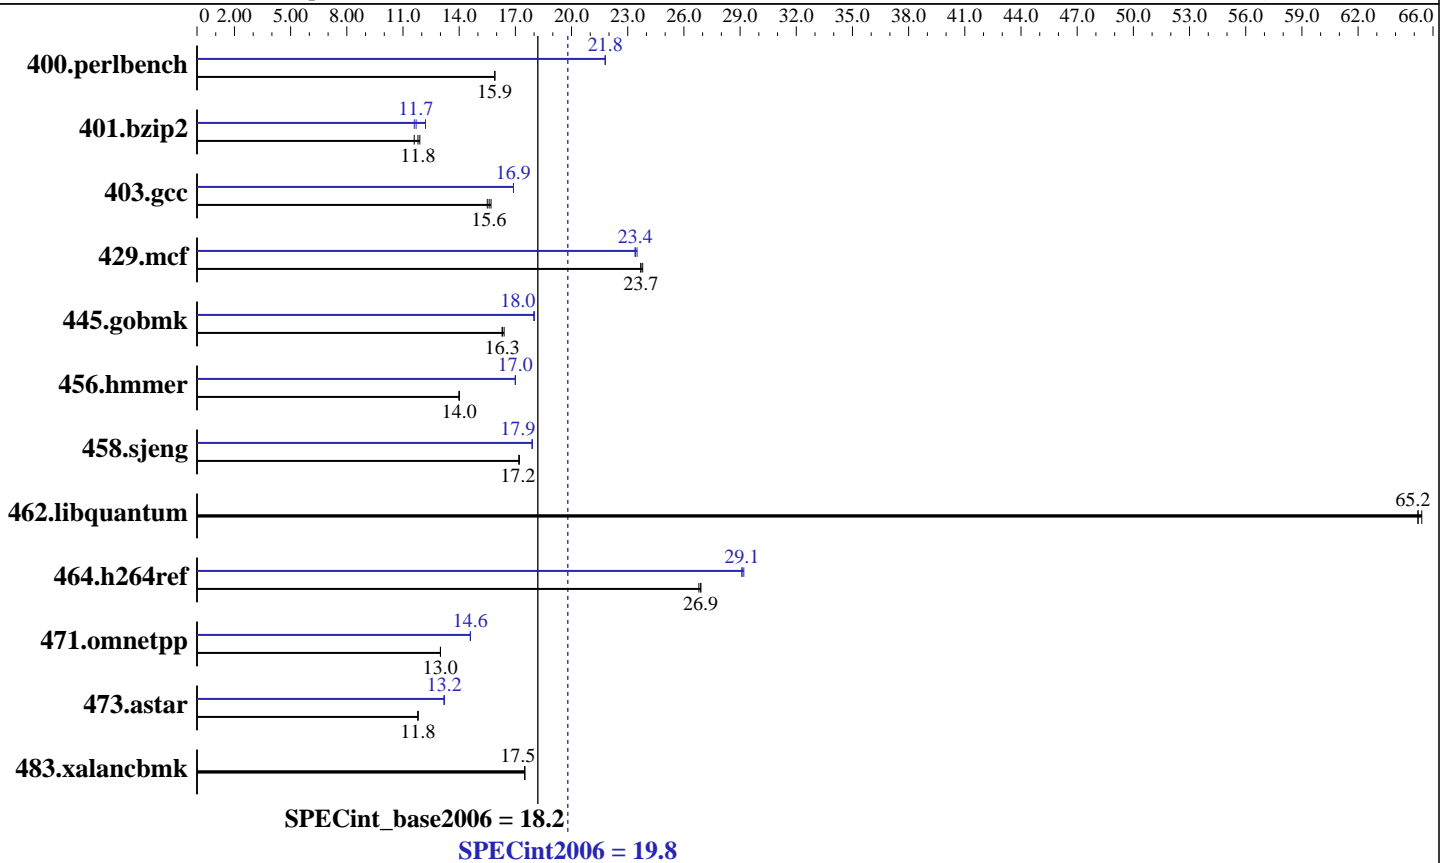

Hardware

CPU Name: Intel Pentium E5200
 CPU Characteristics:
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 2 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 4 GB (4x1GB DDR2-800 CL5)
 Disk Subsystem: Seagate 320 GB SATA, 7200RPM
 Other Hardware: None

Software

Operating System: Windows Vista Ultimate w/ SP1 (64-bit)
 Compiler: Intel C++ Compiler Professional 11.0 for IA32
 Build 20080930 Package ID: w_cproc_p_11.0.054
 Microsoft Visual Studio 2008 (for libraries)
 Auto Parallel: Yes
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: SmartHeap Library Version 8.1 from
<http://www.microquill.com/>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 19.8

Intel DQ45CB motherboard (Intel Pentium E5200)

SPECint_base2006 = 18.2

CPU2006 license: 13

Test date: Apr-2009

Test sponsor: Intel Corporation

Hardware Availability: May-2009

Tested by: Intel Corporation

Software Availability: Nov-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	615	15.9	614	15.9	613	15.9	448	21.8	447	21.8	447	21.8
401.bzip2	811	11.9	816	11.8	833	11.6	794	12.2	833	11.6	825	11.7
403.gcc	514	15.7	520	15.5	515	15.6	477	16.9	477	16.9	477	16.9
429.mcf	384	23.7	384	23.8	385	23.7	390	23.4	389	23.5	390	23.4
445.gobmk	641	16.4	642	16.3	642	16.3	582	18.0	582	18.0	581	18.0
456.hammer	667	14.0	666	14.0	666	14.0	549	17.0	549	17.0	549	17.0
458.sjeng	703	17.2	703	17.2	703	17.2	676	17.9	676	17.9	677	17.9
462.libquantum	318	65.2	317	65.4	318	65.2	318	65.2	317	65.4	318	65.2
464.h264ref	824	26.9	825	26.8	824	26.9	760	29.1	760	29.1	759	29.2
471.omnetpp	481	13.0	480	13.0	480	13.0	429	14.6	428	14.6	428	14.6
473.astar	594	11.8	594	11.8	594	11.8	532	13.2	532	13.2	532	13.2
483.xalancbmk	394	17.5	393	17.5	394	17.5	394	17.5	393	17.5	394	17.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Tested systems can be used with Shin-G ATX case,
 Antec Truepower Trio power supply TP3-650
 Binaries were built on Windows Vista Ultimate (32-bit)
 Binaries were built on Windows Vista Ultimate (32-bit)
 OMP_NUM_THREADS set to number of logical processors as seen by the OS
 KMP_AFFINITY set to physical,0
 submit disabled for 462.libquantum peak

Base Compiler Invocation

C benchmarks:
 icl -Qvc9 -Qc99

C++ benchmarks:
 icl -Qvc9

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32
 464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
 483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 19.8

Intel DQ45CB motherboard (Intel Pentium E5200)

SPECint_base2006 = 18.2

CPU2006 license: 13

Test date: Apr-2009

Test sponsor: Intel Corporation

Hardware Availability: May-2009

Tested by: Intel Corporation

Software Availability: Nov-2008

Base Optimization Flags

C benchmarks:

-QxSSSE3 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel
-Qpar-runtime-control -Qvec-guard-write /F512000000

C++ benchmarks:

-QxSSSE3 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks:

icl -Qvc9 -Qc99

C++ benchmarks:

icl -Qvc9

Peak Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword

Peak Optimization Flags

C benchmarks:

400.perlbench: -QxSSSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

401.bzip2: -QxSSSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias
/F512000000

403.gcc: -QxSSSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- /F512000000

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 19.8

Intel DQ45CB motherboard (Intel Pentium E5200)

SPECint_base2006 = 18.2

CPU2006 license: 13

Test date: Apr-2009

Test sponsor: Intel Corporation

Hardware Availability: May-2009

Tested by: Intel Corporation

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

429.mcf: -QxSSSE3 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

445.gobmk: -QxSSSE3 -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmer: -QxSSSE3 -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

458.sjeng: -QxSSSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 /F512000000

462.libquantum: basepeak = yes

464.h264ref: Same as 456.hmmer

C++ benchmarks:

471.omnetpp: -QxSSSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-ra-region-strategy=block /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

473.astar: -QxSSSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-ra-region-strategy=routine /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090710.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090710.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 19.8

Intel DQ45CB motherboard (Intel Pentium E5200)

SPECint_base2006 = 18.2

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Apr-2009

Hardware Availability: May-2009

Software Availability: Nov-2008

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 01:17:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 June 2009.