SPEC® CINT2006 Result
Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.
(Test Sponsor: Intel Corporation)

Gigabyte MA78GM-S2H Motherboard (AMD Athlon X2 7750)
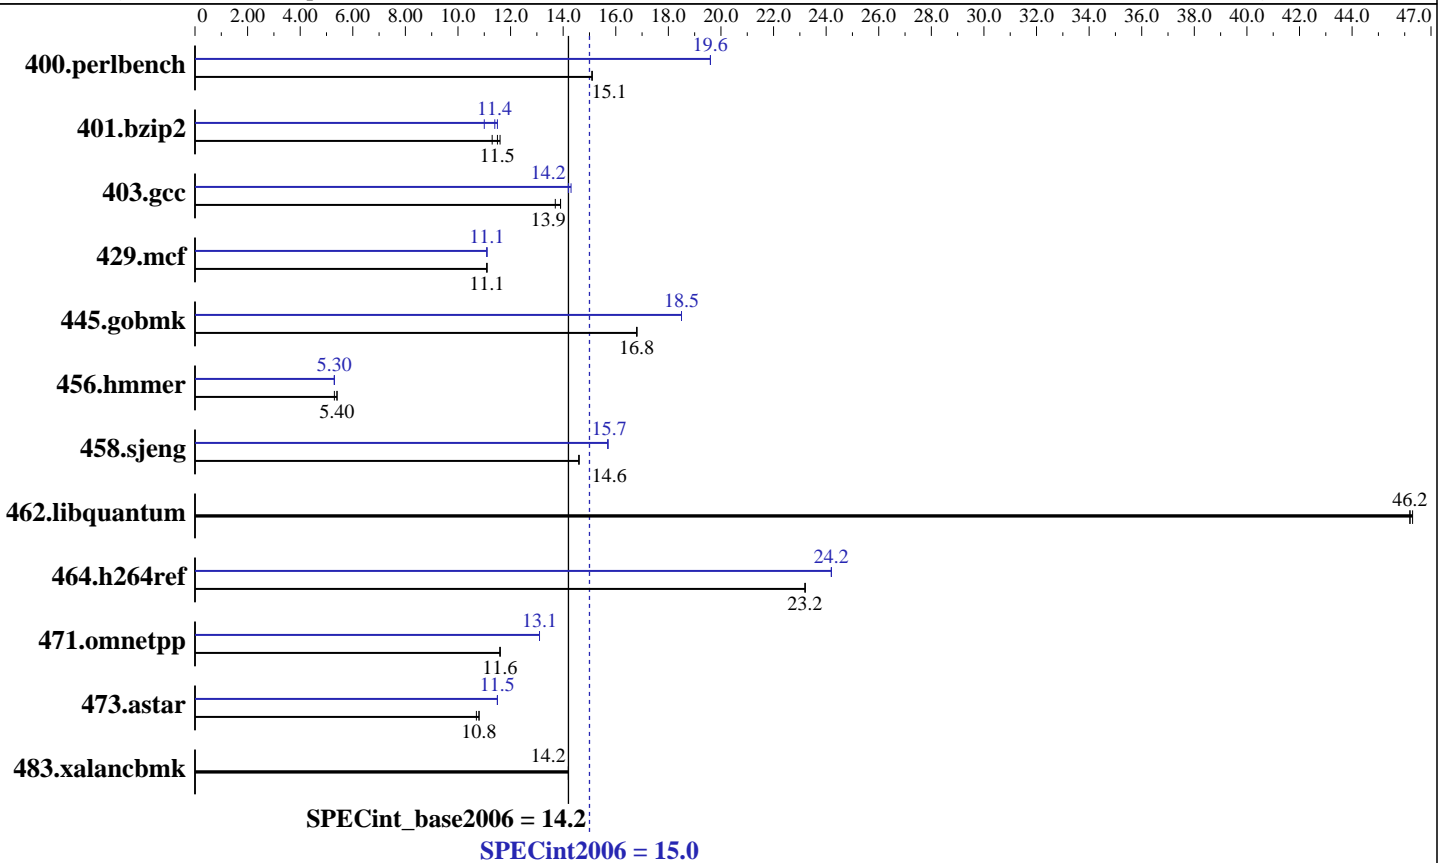
$SPECint^{®}2006 =$ 15.0

SPECint_base2006 = 14.2

CPU2006 license: 13	**Test date:**	May-2009
Test sponsor: Intel Corporation	**Hardware Availability:**	Dec-2008
Tested by: Intel Corporation	**Software Availability:**	Nov-2008

SPECint_base2006 = 14.2
SPECint2006 = 15.0

Hardware
CPU Name:	AMD Athlon X2 7750
CPU Characteristics:	
CPU MHz:	2700
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	2 MB I+D on chip per chip
Other Cache:	None
Memory:	4 GB (4x1GB DDR2-800 CL5)
Disk Subsystem:	Seagate 320 GB SATA, 7200RPM
Other Hardware:	None

Software
Operating System:	Windows Vista Ultimate w/ SP1 (64-bit)
Compiler:	Intel C++ Compiler Professional 11.0 for IA32 Build 20080930 Package ID: w_cproc_p_11.0.054 Microsoft Visual Studio 2008 (for libraries)
Auto Parallel:	Yes
File System:	NTFS
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	SmartHeap Library Version 8.1 from http://www.microquill.com/

SPEC CINT2006 Result
Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.
(Test Sponsor: Intel Corporation)

Gigabyte MA78GM-S2H Motherboard (AMD Athlon X2 7750)

$SPECint2006 =$ 15.0

$SPECint\_base2006 =$ 14.2

CPU2006 license: 13	**Test date:** May-2009
Test sponsor: Intel Corporation	**Hardware Availability:** Dec-2008
Tested by: Intel Corporation	**Software Availability:** Nov-2008

Results Table

Benchmark	Base						Peak					
	Seconds	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**
400.perlbench	648	15.1	647	15.1	**647**	**15.1**	**499**	**19.6**	499	19.6	498	19.6
401.bzip2	**839**	**11.5**	835	11.6	853	11.3	837	11.5	878	11.0	**845**	**11.4**
403.gcc	**581**	**13.9**	580	13.9	589	13.7	568	14.2	**567**	**14.2**	561	14.3
429.mcf	**819**	**11.1**	819	11.1	820	11.1	822	11.1	**821**	**11.1**	821	11.1
445.gobmk	623	16.8	623	16.8	**623**	**16.8**	567	18.5	**567**	**18.5**	567	18.5
456.hmmer	1728	5.40	**1734**	**5.40**	1748	5.30	1772	5.30	1755	5.30	**1763**	**5.30**
458.sjeng	826	14.6	**826**	**14.6**	827	14.6	772	15.7	**772**	**15.7**	773	15.7
462.libquantum	448	46.3	449	46.2	**448**	**46.2**	448	46.3	449	46.2	**448**	**46.2**
464.h264ref	954	23.2	**955**	**23.2**	956	23.2	916	24.2	916	24.2	**916**	**24.2**
471.omnetpp	537	11.6	538	11.6	**538**	**11.6**	477	13.1	**477**	**13.1**	479	13.1
473.astar	653	10.8	**653**	**10.8**	654	10.7	611	11.5	613	11.5	**612**	**11.5**
483.xalancbmk	485	14.2	**486**	**14.2**	486	14.2	485	14.2	**486**	**14.2**	486	14.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
Tested systems can be used with Shin-G ATX case, Antec NeoPower 480W power supply
Binaries were built on Windows Vista Ultimate (32-bit)
OMP_NUM_THREADS set to number of logical processors as seen by the OS
KMP_AFFINITY set to physical,0
```

Base Compiler Invocation

C benchmarks:
```
icl -Qvc9 -Qc99
```

C++ benchmarks:
```
icl -Qvc9
```

Base Portability Flags

```
    403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword
```

SPEC CINT2006 Result
Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.
(Test Sponsor: Intel Corporation)

Gigabyte MA78GM-S2H Motherboard (AMD Athlon X2 7750)

SPECint2006 =   15.0

SPECint_base2006 =   14.2

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: May-2009
Hardware Availability: Dec-2008
Software Availability: Nov-2008

Base Optimization Flags

C benchmarks:
```
/arch:SSE2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel
-Qpar-runtime-control -Qvec-guard-write /F512000000
```

C++ benchmarks:
```
/arch:SSE2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F512000000 shlw32m.lib          -link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks:
```
icl -Qvc9 -Qc99
```

C++ benchmarks:
```
icl -Qvc9
```

Peak Portability Flags

```
    403.gcc: -DSPEC_CPU_WIN32
 464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
               -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
               /F512000000 shlw32m.lib          -link /FORCE:MULTIPLE

    401.bzip2: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
               -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias
               /F512000000

      403.gcc: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
               -Qipo -O3 -Qprec-div- /F512000000
```

Continued on next page

GIGA-BYTE Technology Co. Ltd.
(Test Sponsor: Intel Corporation)

$SPECint2006 = $ 15.0

Gigabyte MA78GM-S2H Motherboard (AMD Athlon X2 7750)

$SPECint_base2006 = $ 14.2

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: May-2009

Hardware Availability: Dec-2008

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

429.mcf: `/arch:SSE2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000`

445.gobmk: `/arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O2 -Qprec-div- -Qansi-alias /F512000000`

456.hmmer: `/arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000`

458.sjeng: `/arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 /F512000000`

462.libquantum: `basepeak = yes`

464.h264ref: `Same as 456.hmmer`

C++ benchmarks:

471.omnetpp: `/arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-ra-region-strategy=block /F512000000 shlw32m.lib -link /FORCE:MULTIPLE`

473.astar: `/arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-ra-region-strategy=routine /F512000000 shlw32m.lib -link /FORCE:MULTIPLE`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.xml

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.
(Test Sponsor: Intel Corporation)

Gigabyte MA78GM-S2H Motherboard (AMD Athlon X2 7750)

SPECint2006 =	15.0
SPECint_base2006 =	14.2

For questions about this result, please contact the tester. For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 01:03:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 June 2009.