



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®2006 = 20.9

ProLiant ML370 G6
(2.0 GHz, Intel Xeon E5504)

SPECint_base2006 = 18.9

CPU2006 license: 3


Test date: Jun-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2009

Tested by: Hewlett-Packard Company

Software Availability: Feb-2009

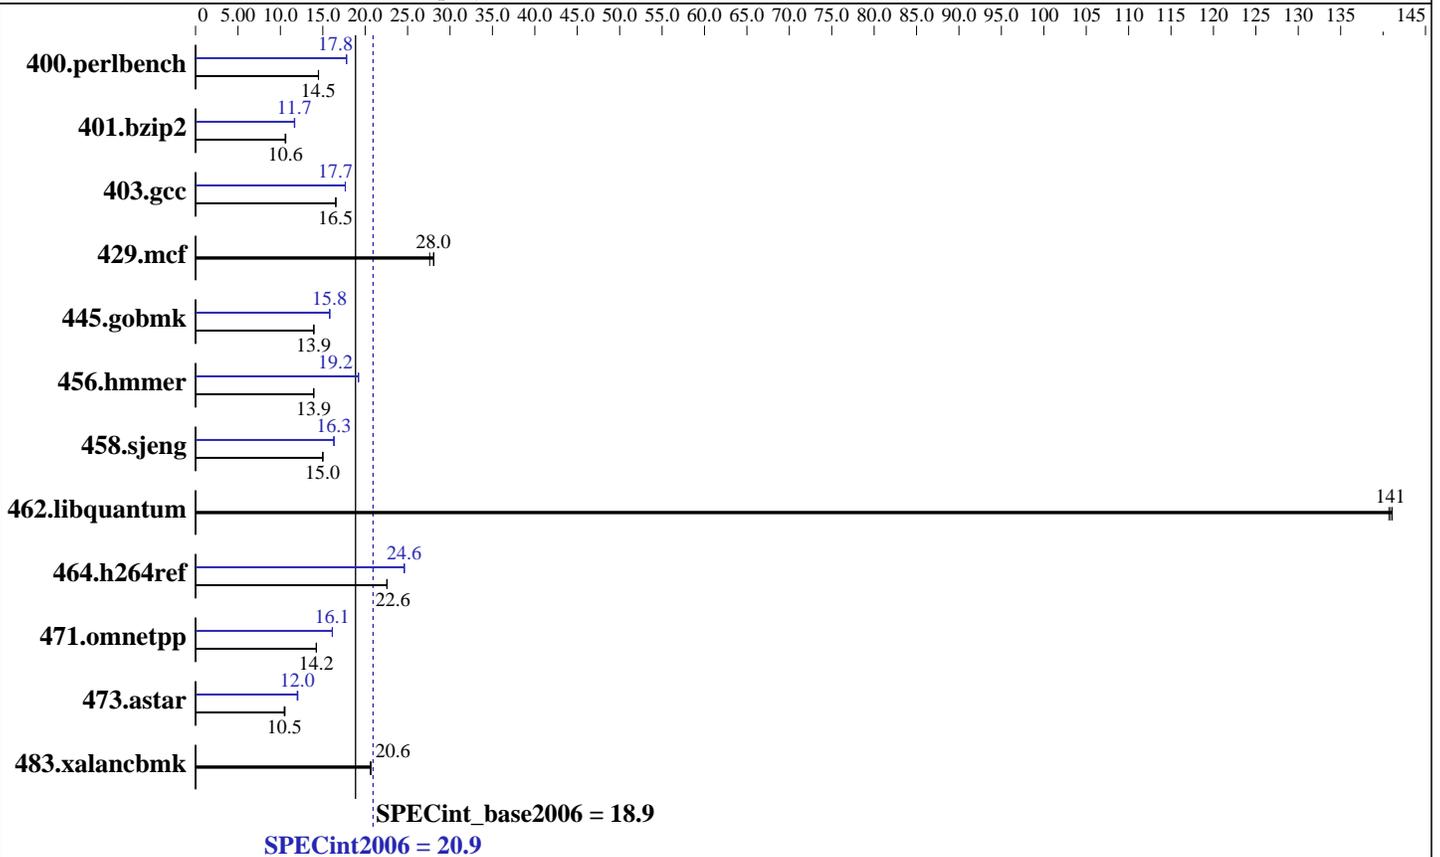

Hardware

CPU Name: Intel Xeon E5504
 CPU Characteristics:
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 4 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (6x4 GB DDR3-10600R CL9, running at 800 MHz)
 Disk Subsystem: 1x146 GB 10 K RPM SAS
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 5.3
 Kernel 2.6.18-128.el5
 Compiler: Intel C++ Compiler 11.0 for Linux
 Build 20090131 Package ID: l_cproc_p_11.0.080
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1
 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant ML370 G6
(2.0 GHz, Intel Xeon E5504)

SPECint2006 = **20.9**

SPECint_base2006 = **18.9**

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Jun-2009

Hardware Availability: Mar-2009

Software Availability: Feb-2009

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
400.perlbench	674	14.5	675	14.5	674	14.5	<u>549</u>	<u>17.8</u>	549	17.8	549	17.8
401.bzip2	912	10.6	907	10.6	912	10.6	828	11.7	828	11.7	825	11.7
403.gcc	487	16.5	488	16.5	486	16.6	456	17.7	456	17.7	456	17.6
429.mcf	330	27.6	325	28.1	325	28.0	330	27.6	325	28.1	325	28.0
445.gobmk	753	13.9	753	13.9	752	13.9	663	15.8	664	15.8	663	15.8
456.hmmer	670	13.9	670	13.9	670	13.9	486	19.2	486	19.2	486	19.2
458.sjeng	808	15.0	807	15.0	805	15.0	742	16.3	742	16.3	742	16.3
462.libquantum	147	141	147	141	147	141	147	141	147	141	147	141
464.h264ref	980	22.6	982	22.5	980	22.6	900	24.6	899	24.6	899	24.6
471.omnetpp	439	14.3	439	14.2	439	14.2	388	16.1	388	16.1	388	16.1
473.astar	666	10.5	670	10.5	671	10.5	585	12.0	582	12.1	585	12.0
483.xalancbmk	335	20.6	334	20.6	334	20.7	335	20.6	334	20.6	334	20.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter

Platform Notes

BIOS configuration:
HP Power Regulator set to Static High Performance Mode
HP Power Profile set to Maximum Performance
Thermal Configuration set to Increased Cooling

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 20.9

ProLiant ML370 G6
(2.0 GHz, Intel Xeon E5504)

SPECint_base2006 = 18.9

CPU2006 license: 3

Test date: Jun-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2009

Tested by: Hewlett-Packard Company

Software Availability: Feb-2009

Base Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel
-par-runtime-control -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/080/bin/intel64/icc

456.hmmer: /opt/intel/Compiler/11.0/080/bin/intel64/icc

458.sjeng: /opt/intel/Compiler/11.0/080/bin/intel64/icc

C++ benchmarks (except as noted below):

icpc

473.astar: /opt/intel/Compiler/11.0/080/bin/intel64/icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 3



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 20.9

ProLiant ML370 G6
(2.0 GHz, Intel Xeon E5504)

SPECint_base2006 = 18.9

CPU2006 license: 3

Test date: Jun-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2009

Tested by: Hewlett-Packard Company

Software Availability: Feb-2009

Peak Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-alloc
-opt-malloc-options=3

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=routine -auto-ilp32
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 20.9

ProLiant ML370 G6
(2.0 GHz, Intel Xeon E5504)

SPECint_base2006 = 18.9

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jun-2009
Hardware Availability: Mar-2009
Software Availability: Feb-2009

Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.10.html>
<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20090710.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.10.xml>
<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20090710.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 01:28:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 June 2009.