



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD210(Intel Xeon X5570, 2.93 GHz)

SPECint®\_rate2006 = 250

SPECint\_rate\_base2006 = 233

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: May-2009

Hardware Availability: May-2009

Software Availability: Mar-2009

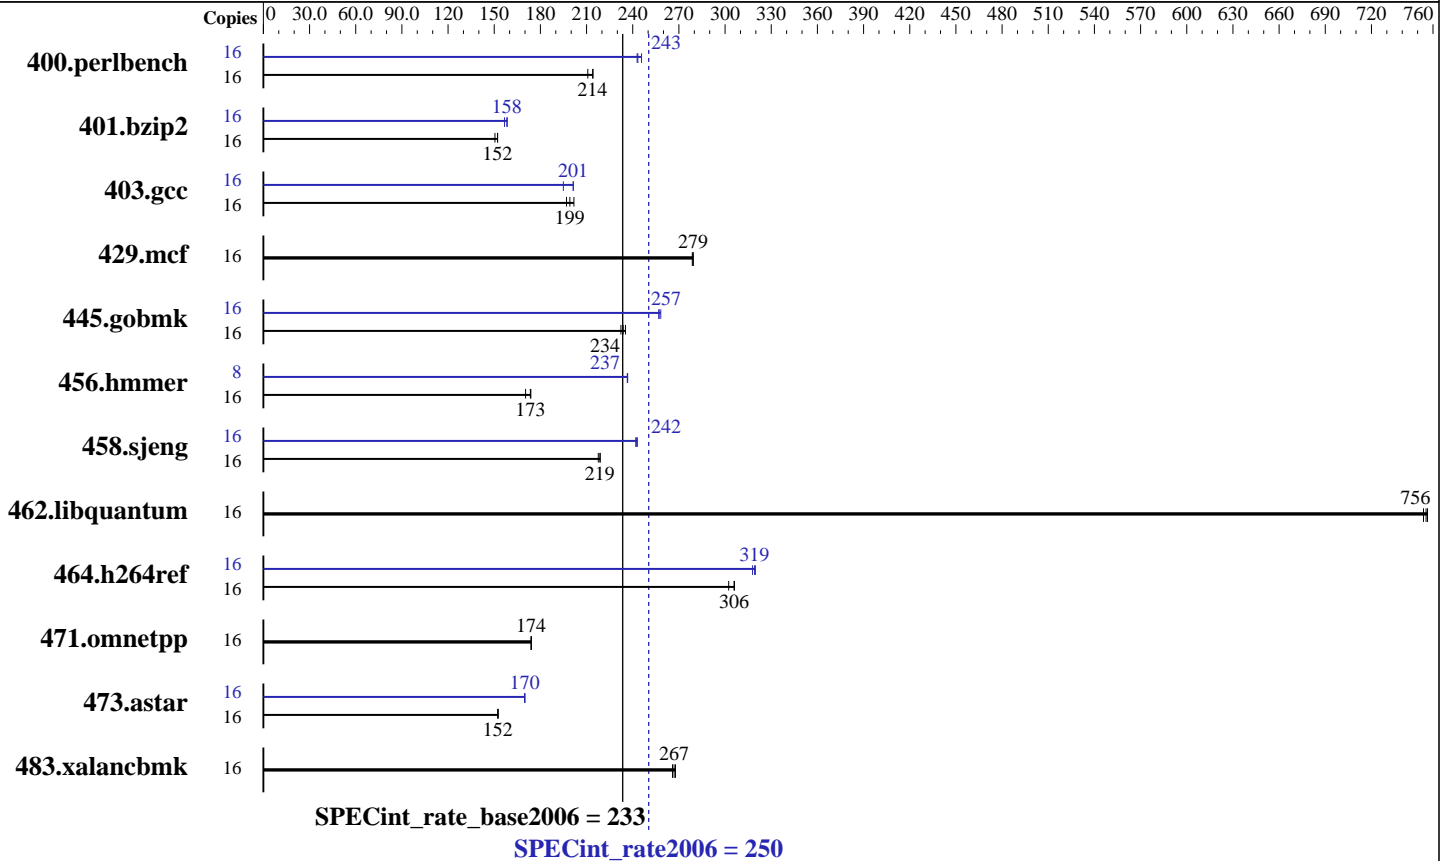

### Hardware

CPU Name: Intel Xeon X5570  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz  
 CPU MHz: 2933  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 24 GB (6 x 4 GB DDR3-1333 DR RDIMM)  
 Disk Subsystem: 1 x 73 GB, SAS 15K RPM  
 Other Hardware: None

### Software

Operating System: SuSE Linux Enterprise Server 10 (x86\_64) SP2, Kernel 2.6.16.60-0.21-smp  
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20090131 Package ID: l\_cproc\_p\_11.0.080  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD210(Intel Xeon X5570, 2.93 GHz)

SPECint\_rate2006 = 250

SPECint\_rate\_base2006 = 233

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: May-2009

Hardware Availability: May-2009

Software Availability: Mar-2009

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	742	211	730	214	<b><u>731</u></b>	<b><u>214</u></b>	16	644	243	636	246	<b><u>642</u></b>	<b><u>243</u></b>
401.bzip2	16	1026	150	<b><u>1015</u></b>	<b><u>152</u></b>	1015	152	16	985	157	<b><u>976</u></b>	<b><u>158</u></b>	974	158
403.gcc	16	654	197	<b><u>647</u></b>	<b><u>199</u></b>	638	202	16	<b><u>640</u></b>	<b><u>201</u></b>	661	195	640	201
429.mcf	16	522	279	<b><u>523</u></b>	<b><u>279</u></b>	524	279	16	522	279	<b><u>523</u></b>	<b><u>279</u></b>	524	279
445.gobmk	16	713	235	<b><u>718</u></b>	<b><u>234</u></b>	722	232	16	<b><u>653</u></b>	<b><u>257</u></b>	653	257	650	258
456.hammer	16	<b><u>861</u></b>	<b><u>173</u></b>	859	174	876	170	8	<b><u>315</u></b>	<b><u>237</u></b>	315	237	316	236
458.sjeng	16	<b><u>885</u></b>	<b><u>219</u></b>	890	218	885	219	16	800	242	797	243	<b><u>799</u></b>	<b><u>242</u></b>
462.libquantum	16	440	754	<b><u>439</u></b>	<b><u>756</u></b>	438	756	16	440	754	<b><u>439</u></b>	<b><u>756</u></b>	438	756
464.h264ref	16	1157	306	1171	302	<b><u>1158</u></b>	<b><u>306</u></b>	16	<b><u>1109</u></b>	<b><u>319</u></b>	1114	318	1108	320
471.omnetpp	16	<b><u>575</u></b>	<b><u>174</u></b>	574	174	575	174	16	<b><u>575</u></b>	<b><u>174</u></b>	574	174	575	174
473.astar	16	737	152	736	153	<b><u>737</u></b>	<b><u>152</u></b>	16	661	170	<b><u>661</u></b>	<b><u>170</u></b>	661	170
483.xalanbmk	16	412	268	<b><u>414</u></b>	<b><u>267</u></b>	415	266	16	412	268	<b><u>414</u></b>	<b><u>267</u></b>	415	266

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalanbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-alloc  
-opt-malloc-options=3 -opt-prefetch

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECint\_rate2006 = 250**

Lenovo ThinkServer RD210(Intel Xeon X5570, 2.93 GHz)

**SPECint\_rate\_base2006 = 233**

**CPU2006 license:** 9017

**Test date:** May-2009

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** May-2009

**Tested by:** Lenovo Group Limited

**Software Availability:** Mar-2009

## Base Optimization Flags (Continued)

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/cpu2006/lib -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/081/bin/intel64/icc

456.hmmer: /opt/intel/Compiler/11.0/081/bin/intel64/icc

458.sjeng: /opt/intel/Compiler/11.0/081/bin/intel64/icc

C++ benchmarks (except as noted below):

icpc

473.astar: /opt/intel/Compiler/11.0/081/bin/intel64/icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

473.astar: -DSPEC\_CPU\_LP64

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -ansi-alias -opt-prefetch

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECint\_rate2006 = 250**

Lenovo ThinkServer RD210(Intel Xeon X5570, 2.93 GHz)

**SPECint\_rate\_base2006 = 233**

**CPU2006 license:** 9017

**Test date:** May-2009

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** May-2009

**Tested by:** Lenovo Group Limited

**Software Availability:** Mar-2009

## Peak Optimization Flags (Continued)

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-alloc  
-opt-malloc-options=3

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
-ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=routine -auto-ilp32  
-Wl,-z,muldefs -L/cpu2006/lib -lsmartheap64

483.xalanbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.15.html>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD210(Intel Xeon X5570, 2.93 GHz)

**SPECint\_rate2006 = 250**

**SPECint\_rate\_base2006 = 233**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** May-2009

**Hardware Availability:** May-2009

**Software Availability:** Mar-2009

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.15.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 03:26:12 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 15 July 2009.