



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®2006 = 21.6

ProLiant DL585 G6
(2.8 GHz AMD Opteron 8439 SE)

SPECint_base2006 = 18.3

CPU2006 license: 3


Test date: Jun-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jul-2009

Tested by: Hewlett-Packard Company

Software Availability: Apr-2009

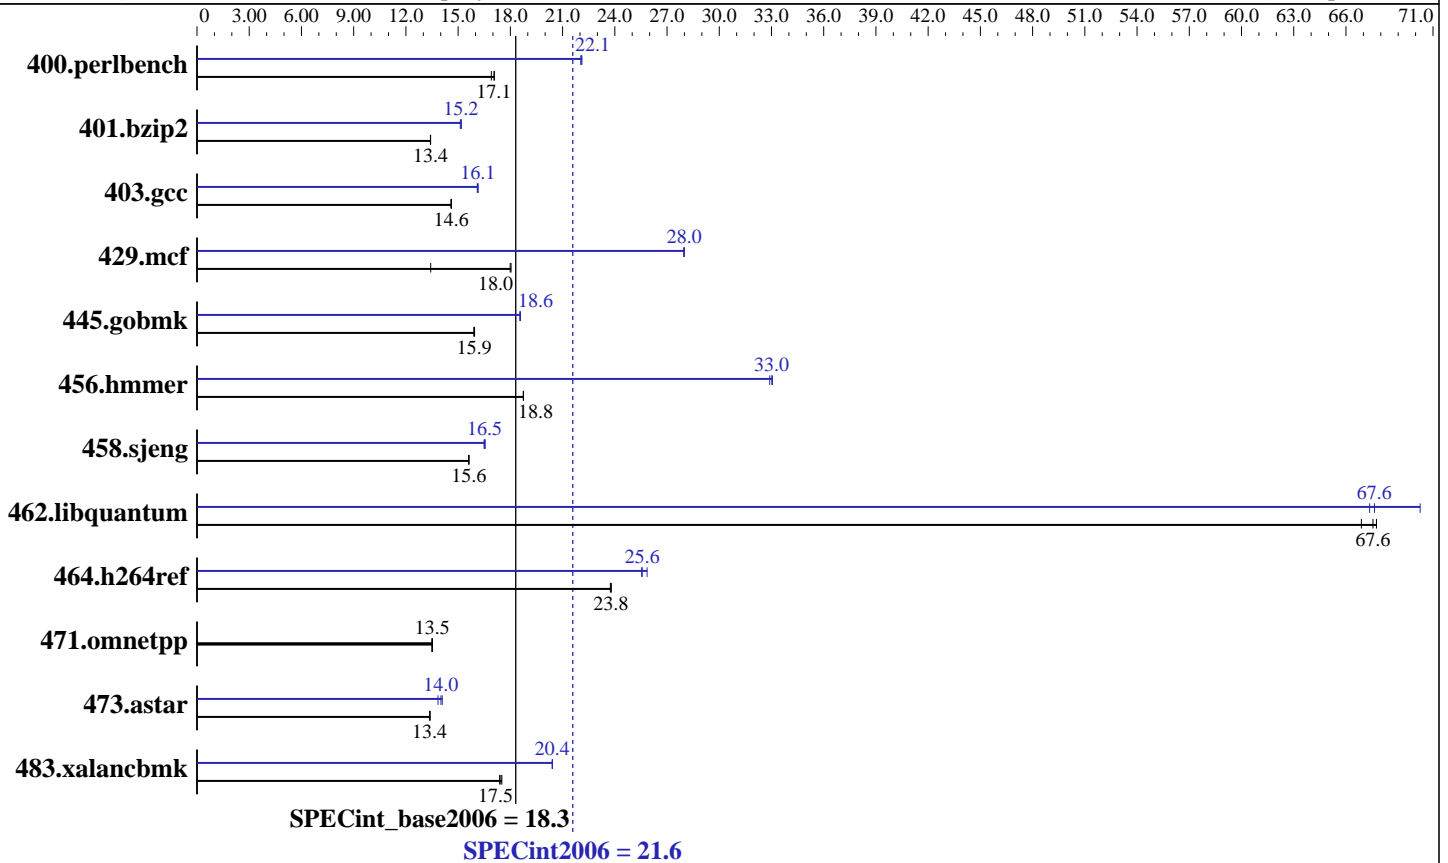

Hardware

CPU Name: AMD Opteron 8439 SE
 CPU Characteristics:
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 6 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (8x4 GB, PC2-6400P CL5)
 Disk Subsystem: 1x146 GB 10 K SAS
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Advanced Platform, Kernel 2.6.18-128.el5
 Compiler: PGI Server Complete Version 8.0 PathScale Compiler Suite Version 3.2
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: binutils 2.18
 32-bit and 64-bit libhugetlbfs libraries
 SmartHeap 8.1 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = **21.6**

ProLiant DL585 G6
(2.8 GHz AMD Opteron 8439 SE)

SPECint_base2006 = **18.3**

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jun-2009
Hardware Availability: Jul-2009
Software Availability: Apr-2009

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	572	17.1	578	16.9	573	17.1	443	22.1	443	22.1	442	22.1
401.bzip2	719	13.4	719	13.4	720	13.4	638	15.1	636	15.2	636	15.2
403.gcc	551	14.6	551	14.6	551	14.6	499	16.1	499	16.1	500	16.1
429.mcf	507	18.0	506	18.0	679	13.4	326	28.0	326	28.0	326	28.0
445.gobmk	659	15.9	658	15.9	660	15.9	565	18.6	566	18.5	564	18.6
456.hammer	498	18.8	498	18.7	498	18.8	284	32.9	283	33.0	282	33.1
458.sjeng	775	15.6	775	15.6	775	15.6	733	16.5	731	16.6	734	16.5
462.libquantum	306	67.8	307	67.6	310	66.9	308	67.4	295	70.3	306	67.6
464.h264ref	930	23.8	930	23.8	932	23.7	865	25.6	856	25.9	866	25.5
471.omnetpp	463	13.5	463	13.5	462	13.5	463	13.5	463	13.5	462	13.5
473.astar	524	13.4	525	13.4	525	13.4	507	13.8	501	14.0	498	14.1
483.xalancbmk	397	17.4	395	17.5	394	17.5	338	20.4	338	20.4	338	20.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Environment stack size set to 'unlimited'
Max locked memory set to 2457600
The libhugetlbfs libraries were installed using the
installation rpms that came with the distribution.
Set vm/nr_hugepages=5400 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
PGI_HUGE_PAGES set to 450.
```

Platform Notes

BIOS configuration:
Power Regulator set to Static High Performance Mode

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_MORECORE = "yes"
NCPUS = "12"
```

Base Compiler Invocation

C benchmarks:
pgcc

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 21.6

ProLiant DL585 G6
(2.8 GHz AMD Opteron 8439 SE)

SPECint_base2006 = 18.3

CPU2006 license: 3

Test date: Jun-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jul-2009

Tested by: Hewlett-Packard Company

Software Availability: Apr-2009

Base Compiler Invocation (Continued)

C++ benchmarks:
pgcpp

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mconcur=innermost
-Mfprelaxed -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
--zc_eh -Mipa=fast -Mipa=inline:6 -tp barcelona-32 -Bstatic_pgi

Base Other Flags

C benchmarks:
-Mipa=jobs:11

C++ benchmarks:
-Mipa=jobs:11

Peak Compiler Invocation

C benchmarks (except as noted below):
pathcc

456.hmmer: pgcc

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 21.6

ProLiant DL585 G6
(2.8 GHz AMD Opteron 8439 SE)

SPECint_base2006 = 18.3

CPU2006 license: 3

Test date: Jun-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jul-2009

Tested by: Hewlett-Packard Company

Software Availability: Apr-2009

Peak Compiler Invocation (Continued)

462.libquantum: pgcc

C++ benchmarks (except as noted below):

pgcpp

483.xalancbmk: pathCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2)
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
 -L/usr/lib64 -lhugetlbfs(pass 2) -Ofast -IPA:plimit=20000
 -IPA:field_reorder=on -LNO:opt=0 -WOPT:if_conv=0
 -CG:local_sched_alg=1

401.bzip2: -march=barcelona -O3 -OPT:alias=disjoint -OPT:Ofast
 -OPT:goto=off -INLINE:aggressive=on -CG:local_sched_alg=1
 -m3dnow
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
 -L/usr/lib64 -lhugetlbfs

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=1
 -LNO:trip_count=256 -LNO:prefetch_ahead=10
 -CG:prefer_lru_reg=off -m32

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
 -CG:gcm=off -GRA:prioritize_by_density=on -m32
 -L/usr/lib -lhugetlbfs

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2)
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 21.6

ProLiant DL585 G6
(2.8 GHz AMD Opteron 8439 SE)

SPECint_base2006 = 18.3

CPU2006 license: 3

Test date: Jun-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jul-2009

Tested by: Hewlett-Packard Company

Software Availability: Apr-2009

Peak Optimization Flags (Continued)

445.gobmk (continued):

-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -OPT:alias=restrict
-LNO:prefetch=1 -LNO:ignore_feedback=off -CG:p2align=on

456.hmmer:

-Mvect=cachesize:6291456 -fastsse -Mvect=partial
-Munroll=n:8 -Msmartalloc=huge -Msafeptr -Mprefetch=t0
-Mfprelaxed -Mipa=const -Mipa=ptr -Mipa=arg -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

458.sjeng:

-march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -ipa
-LNO:ignore_feedback=off -LNO:full_unroll=10 -LNO:fusion=0
-LNO:fission=2 -IPA:pu_reorder=2 -CG:ptr_load_use=0
-OPT:unroll_times_max=8 -INLINE:aggressive=on

462.libquantum:

-Mvect=cachesize:6291456 -fastsse -Munroll=m:8
-Msmartalloc=huge -Mprefetch=distance:8 -Mconcur=innermost
-Mconcur=noaltcode -Mfprelaxed -Mipa=fast -Mipa=inline
-Mipa=noarg -tp barcelona-64 -Bstatic_pgi

464.h264ref:

-march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -IPA:plimit=20000
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
-CG:push_pop_int_saved_regs=off -CG:prefer_lru_reg=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar:

-Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline:6(pass 2) -Mvect=cachesize:6291456 -fastsse
-O4 -Msmartalloc=huge -Msafeptr=global -Mfprelaxed
--zc_eh -tp barcelona-32 -Bstatic_pgi

483.xalancbmk:

-march=barcelona -Ofast -INLINE:aggressive=on -m32
-L/cpu2006/SmartHeap_8.1/lib -lsmartheap

Peak Other Flags

C benchmarks:

456.hmmer: -Mipa=jobs:11

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 21.6

ProLiant DL585 G6
(2.8 GHz AMD Opteron 8439 SE)

SPECint_base2006 = 18.3

CPU2006 license: 3

Test date: Jun-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jul-2009

Tested by: Hewlett-Packard Company

Software Availability: Apr-2009

Peak Other Flags (Continued)

462.libquantum: -Mipa=jobs:11

C++ benchmarks (except as noted below):

-Mipa=jobs:11(pass 2)

483.xalancbmk: No flags used

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/pgi80_linux_flags.html
<http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.html>
http://www.spec.org/cpu2006/flags/CPU2006_flags.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/pgi80_linux_flags.xml
<http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.xml>
http://www.spec.org/cpu2006/flags/CPU2006_flags.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 02:21:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 July 2009.