



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint[®]_rate2006 = 212

PowerEdge M805 (AMD Opteron 2439 SE, 2.80 GHz)

SPECint_rate_base2006 = 166

CPU2006 license: 55


Test date: Jul-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

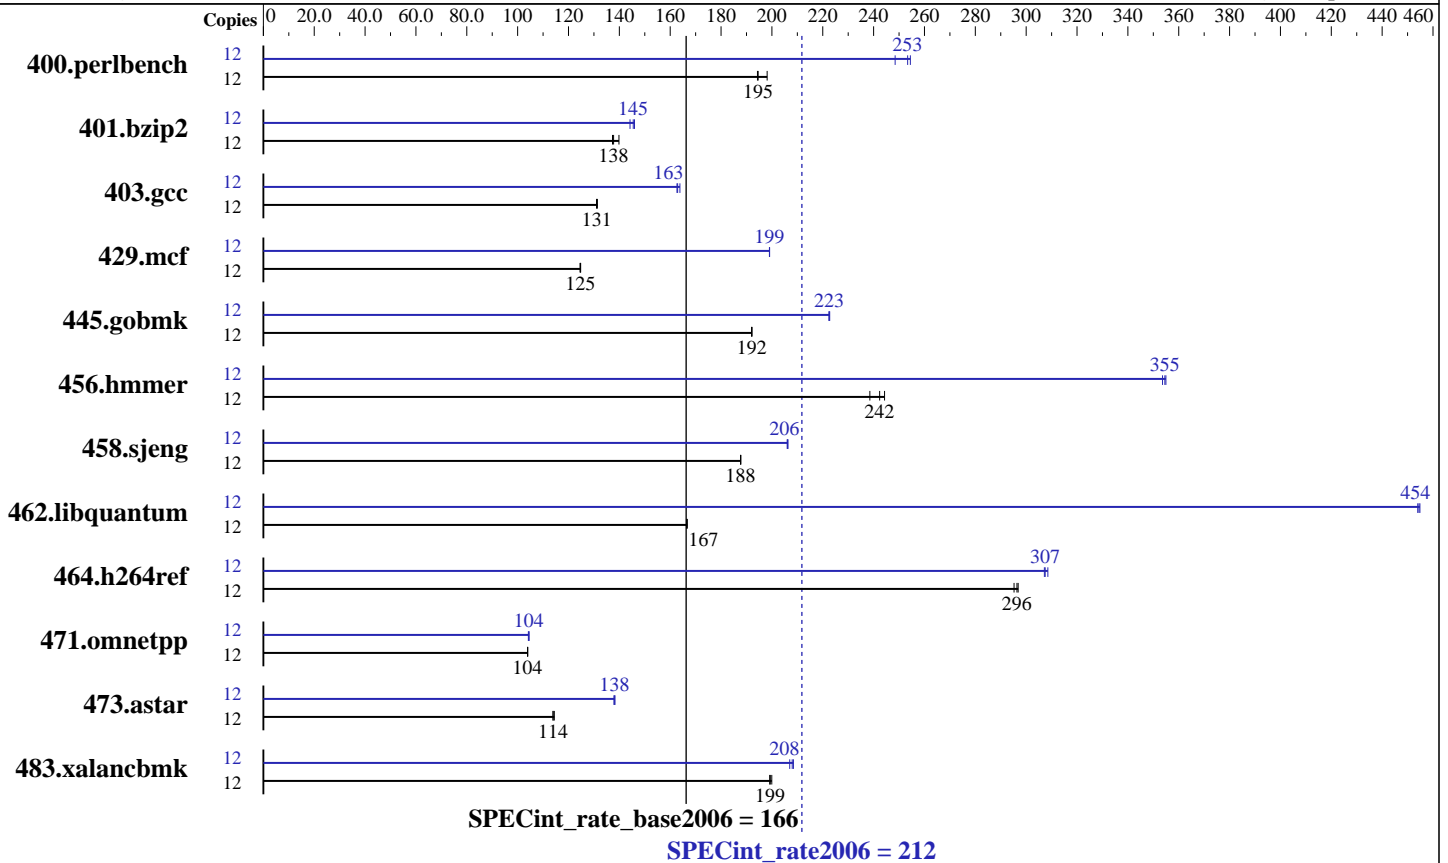

Hardware

CPU Name: AMD Opteron 2439 SE
 CPU Characteristics:
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 6 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (8 x 4 GB DDR2-800)
 Disk Subsystem: 1 x 73 GB 15000 RPM SAS
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5
 Compiler: PGI Server Complete Version 8.0
 x86 Open64 4.2.2 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: binutils 2.18
 SmartHeap 8.1 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 212

PowerEdge M805 (AMD Opteron 2439 SE, 2.80 GHz)

SPECint_rate_base2006 = 166

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jul-2009
Hardware Availability: Aug-2009
Software Availability: Apr-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	592	198	603	194	602	195	12	472	248	461	254	463	253
401.bzip2	12	828	140	841	138	843	137	12	803	144	793	146	796	145
403.gcc	12	736	131	735	131	737	131	12	590	164	593	163	594	163
429.mcf	12	877	125	877	125	879	125	12	550	199	550	199	550	199
445.gobmk	12	656	192	655	192	655	192	12	566	223	565	223	566	222
456.hammer	12	469	239	458	244	462	242	12	316	355	317	354	315	355
458.sjeng	12	773	188	774	188	774	188	12	705	206	705	206	704	206
462.libquantum	12	1493	167	1493	167	1492	167	12	548	454	547	455	547	454
464.h264ref	12	896	296	899	295	895	297	12	864	307	861	309	865	307
471.omnetpp	12	721	104	722	104	722	104	12	719	104	718	104	720	104
473.astar	12	736	114	739	114	739	114	12	611	138	610	138	609	138
483.xalancbmk	12	415	199	416	199	414	200	12	400	207	398	208	397	208

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=5400 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/root/cpu2006-1.1/amd0905is-libs/64:/root/cpu2006-1.1/amd0905is-libs/32"
PGI_HUGE_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 212

PowerEdge M805 (AMD Opteron 2439 SE, 2.80 GHz)

SPECint_rate_base2006 = 166

CPU2006 license: 55

Test date: Jul-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmcr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=barcelona -Ofast -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

C++ benchmarks:
-march=barcelona -Ofast -m32 -INLINE:aggressive=on
-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

Peak Compiler Invocation

C benchmarks (except as noted below):
opencc

456.hmmcr: pgcc

C++ benchmarks (except as noted below):
openCC

473.astar: pgcpp



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 212

PowerEdge M805 (AMD Opteron 2439 SE, 2.80 GHz)

SPECint_rate_base2006 = 166

CPU2006 license: 55

Test date: Jul-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalanbmk: -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
               -OPT:unroll_times_max=8 -OPT:unroll_size=256
               -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
               -CG:local_sched_alg=1 -CG:unroll_fb_req=on
               -HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
            -OPT:unroll_size=0 -OPT:Ofast -OPT:goto=off
            -INLINE:aggressive=on -CG:local_sched_alg=1 -m3dnw
            -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
          -LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
          -HP:bdt=2m:heap=2m -GRA:unspill=on

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
          -CG:gcm=off -GRA:prioritize_by_density=on -m32
          -HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
            -OPT:unroll_times_max=8 -OPT:unroll_size=256
            -OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
            -IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
            -LNO:ignore_feedback=off -CG:p2align=on
            -CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -fastsse -Mvect=partial -Munroll=n:8 -Msmartalloc=huge
            -Msafeptr -Mprefetch=t0 -Mfprelaxed -Mipa=const -Mipa=ptr
            -Mipa=arg -Mipa=inline -tp shanghai-64 -Bstatic_pgi

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 212

PowerEdge M805 (AMD Opteron 2439 SE, 2.80 GHz)

SPECint_rate_base2006 = 166

CPU2006 license: 55

Test date: Jul-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

Peak Optimization Flags (Continued)

458.sjeng: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -ipa -LNO:ignore_feedback=off
 -LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2
 -IPA:pu_reorder=2 -CG:ptr_load_use=0
 -OPT:unroll_times_max=8 -INLINE:aggressive=on
 -HP:bdt=2m:heap=2m

462.libquantum: -march=barcelona -Ofast -LNO:pf2=0 -CG:gcm=off
 -CG:use_prefetchnta=on -CG:cmp_peep=on -WOPT:aggstr=0
 -HP:bdt=2m:heap=2m -OPT:alias=disjoint
 -INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000

464.h264ref: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
 -OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
 -CG:push_pop_int_saved_regs=off -HP:bdt=2m:heap=2m

C++ benchmarks:

471.omnetpp: -march=barcelona -Ofast -CG:gcm=off -INLINE:aggressive=on
 -OPT:alias=disjoint -WOPT:if_conv=0 -m32
 -L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
 -Mipa=inline:6(pass 2) -fastsse -O4 -Msmartalloc=huge
 -Msafeptr=global -Mfprelaxed --zc_eh -tp shanghai-32
 -Bstatic_pgi

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32
 -CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off
 -L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

Peak Other Flags

C benchmarks:

456.hmmmer: -Mipa=jobs:4

C++ benchmarks:

473.astar: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.html
<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revB.html>
<http://www.spec.org/cpu2006/flags/amd-platform.html>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 212

PowerEdge M805 (AMD Opteron 2439 SE, 2.80 GHz)

SPECint_rate_base2006 = 166

CPU2006 license: 55

Test date: Jul-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

You can also download the XML flags sources by saving the following links:

- http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.xml
- <http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revB.xml>
- <http://www.spec.org/cpu2006/flags/amd-platform.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 03:13:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 August 2009.