



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp<sup>®</sup>\_rate2006 = 263

PowerEdge M905 (AMD Opteron 8431, 2.40 GHz)

SPECfp\_rate\_base2006 = 241

CPU2006 license: 55


Test date: Jul-2009

Test sponsor: Dell Inc.

Hardware Availability: Jul-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

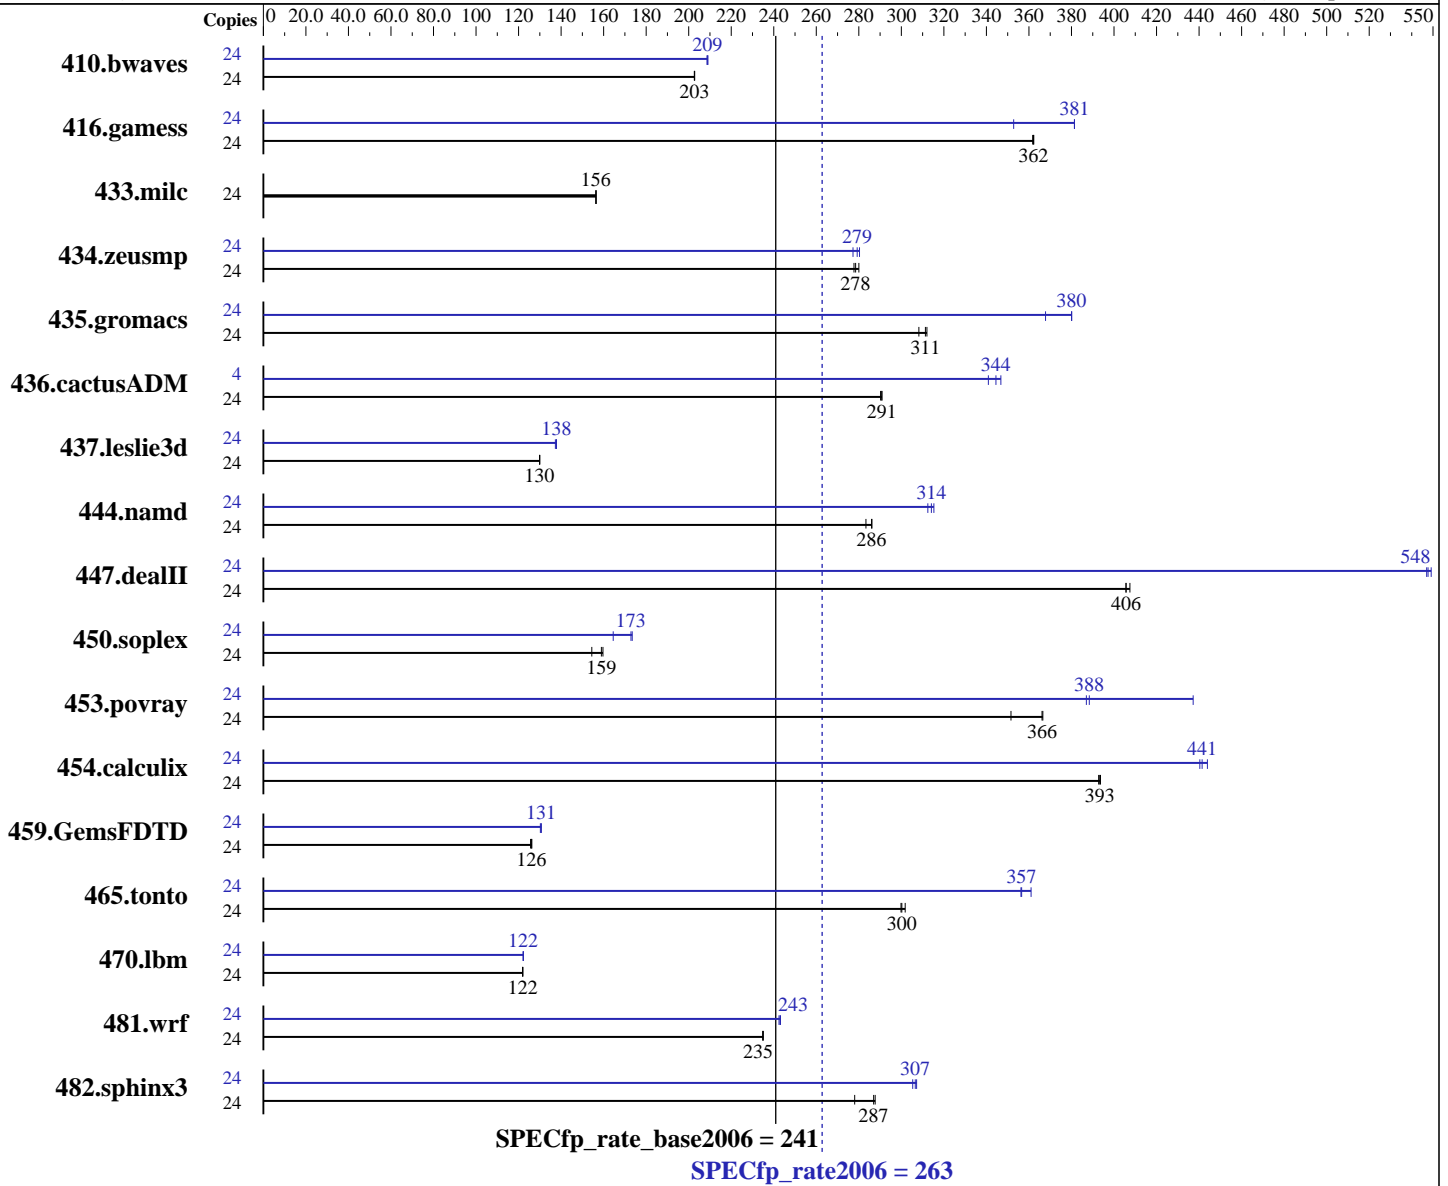

### Hardware

CPU Name: AMD Opteron 8431  
 CPU Characteristics:  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip  
 CPU(s) orderable: 4 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5  
 Compiler: PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite (from AMD)  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 263

PowerEdge M905 (AMD Opteron 8431, 2.40 GHz)

SPECfp\_rate\_base2006 = 241

CPU2006 license: 55

Test date: Jul-2009

Test sponsor: Dell Inc.

Hardware Availability: Jul-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

L3 Cache: 6 MB I+D on chip per chip  
Other Cache: None  
Memory: 64 GB (16 x 4 GB DDR2-800)  
Disk Subsystem: 1 x 73 GB 15000 RPM SAS  
Other Hardware: None

Other Software: binutils 2.18

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	<b>1609</b>	<b>203</b>	1608	203	1610	203	24	1561	209	<b>1561</b>	<b>209</b>	1564	209
416.gamess	24	<b>1298</b>	<b>362</b>	1297	362	1299	362	24	1232	381	<b>1232</b>	<b>381</b>	1332	353
433.milc	24	1408	156	<b>1409</b>	<b>156</b>	1409	156	24	1408	156	<b>1409</b>	<b>156</b>	1409	156
434.zeusmp	24	<b>784</b>	<b>278</b>	786	278	780	280	24	779	280	788	277	<b>782</b>	<b>279</b>
435.gromacs	24	549	312	<b>550</b>	<b>311</b>	556	308	24	466	368	451	380	<b>451</b>	<b>380</b>
436.cactusADM	24	988	290	986	291	<b>986</b>	<b>291</b>	4	140	341	138	347	<b>139</b>	<b>344</b>
437.leslie3d	24	<b>1737</b>	<b>130</b>	1737	130	1736	130	24	1643	137	1637	138	<b>1637</b>	<b>138</b>
444.namd	24	<b>673</b>	<b>286</b>	673	286	679	283	24	616	312	<b>613</b>	<b>314</b>	610	315
447.dealII	24	677	406	674	407	<b>677</b>	<b>406</b>	24	502	547	500	549	<b>501</b>	<b>548</b>
450.soplex	24	1296	154	<b>1259</b>	<b>159</b>	1253	160	24	1217	165	<b>1158</b>	<b>173</b>	1154	173
453.povray	24	363	352	348	367	<b>349</b>	<b>366</b>	24	<b>329</b>	<b>388</b>	292	437	330	387
454.calculix	24	504	393	<b>503</b>	<b>393</b>	503	394	24	446	444	<b>449</b>	<b>441</b>	450	440
459.GemsFDTD	24	<b>2019</b>	<b>126</b>	2027	126	2018	126	24	<b>1950</b>	<b>131</b>	1955	130	1949	131
465.tonto	24	<b>787</b>	<b>300</b>	788	300	782	302	24	663	356	654	361	<b>662</b>	<b>357</b>
470.lbm	24	2703	122	2705	122	<b>2704</b>	<b>122</b>	24	2699	122	<b>2698</b>	<b>122</b>	2697	122
481.wrf	24	<b>1141</b>	<b>235</b>	1141	235	1140	235	24	1106	242	1102	243	<b>1103</b>	<b>243</b>
482.sphinx3	24	<b>1630</b>	<b>287</b>	1626	288	1682	278	24	1532	305	1523	307	<b>1526</b>	<b>307</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=10800 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 263

PowerEdge M905 (AMD Opteron 8431, 2.40 GHz)

SPECfp\_rate\_base2006 = 241

CPU2006 license: 55

Test date: Jul-2009

Test sponsor: Dell Inc.

Hardware Availability: Jul-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_LIMIT = "450"

LD\_LIBRARY\_PATH = "/root/cpu2006-1.1/amd0905is-libs/64:/root/cpu2006-1.1/amd0905is-libs/32"

NCPUS = "6"

PGI\_HUGE\_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

## Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -Mnomain  
 436.cactusADM: -DSPEC\_CPU\_LP64 -Mnomain  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.deallI: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -Mnomain  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 263

PowerEdge M905 (AMD Opteron 8431, 2.40 GHz)

SPECfp\_rate\_base2006 = 241

CPU2006 license: 55

Test date: Jul-2009

Test sponsor: Dell Inc.

Hardware Availability: Jul-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

## Base Optimization Flags

C benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp shanghai-64 -Bstatic\_pgi

C++ benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed --zc\_eh -Mipa=fast  
-Mipa=inline -tp shanghai-64 -Bstatic\_pgi

Fortran benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mvect=short -Mipa=fast  
-Mipa=inline -tp shanghai-64 -Bstatic\_pgi

Benchmarks using both Fortran and C:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp shanghai-64 -Mvect=short -Bstatic\_pgi

## Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Fortran benchmarks:

-Mipa=jobs:4

Benchmarks using both Fortran and C:

-Mipa=jobs:4

## Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks (except as noted below):

openCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):

openf95

410.bwaves: pgf95

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 263

PowerEdge M905 (AMD Opteron 8431, 2.40 GHz)

SPECfp\_rate\_base2006 = 241

CPU2006 license: 55

Test date: Jul-2009

Test sponsor: Dell Inc.

Hardware Availability: Jul-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

## Peak Compiler Invocation (Continued)

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

435.gromacs: opencc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64  
 436.cactusADM: -DSPEC\_CPU\_LP64 -Mnomain  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -Mnomain  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -fastsse -Msmartalloc=huge -Mprefetch=t0 -Mloop32  
-Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64  
-Bstatic\_pgi

482.sphinx3: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse  
-Mfprelaxed -Msmartalloc -tp shanghai-64 -Bstatic\_pgi

C++ benchmarks:

444.namd: -Mphi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)  
-Mipa=inline(pass 2) -fastsse -Munroll=n:4 -Munroll=m:8  
-Msmartalloc=huge -Mnodepchk -Mfprelaxed --zc\_eh  
-tp shanghai-64 -Bstatic\_pgi

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 263

PowerEdge M905 (AMD Opteron 8431, 2.40 GHz)

SPECfp\_rate\_base2006 = 241

CPU2006 license: 55

Test date: Jul-2009

Test sponsor: Dell Inc.

Hardware Availability: Jul-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

## Peak Optimization Flags (Continued)

447.dealll: -march=barcelona -Ofast -static -INLINE:aggressive=on  
-LNO:opt=0 -Wf,-fno-exceptions -m32 -OPT:unroll\_times\_max=8  
-OPT:unroll\_size=256 -OPT:unroll\_level=2 -HP:bdt=2m:heap=2m  
-GRA:unspill=on -CG:cmp\_peep=on -TENV:frame\_pointer=off

450.soplex: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -INLINE:aggressive=on  
-OPT:IEEE\_arith=3 -OPT:IEEE\_NaN\_Inf=off  
-OPT:fold\_unsigned\_relops=on -OPT:malloc\_alg=1  
-CG:load\_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on  
-HP:bdt=2m:heap=2m

### Fortran benchmarks:

410.bwaves: -fastsse -Msmartalloc -Mprefetch=nta -Mfprelaxed  
-Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic\_pgi

416.gamess: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3  
-OPT:unroll\_size=256 -HP:bdt=2m:heap=2m

434.zeusmp: -fastsse -Mfprelaxed -Mprefetch=distance:8 -Mprefetch=t0  
-Msmartalloc=huge -Msmartalloc=hugebss -Mipa=fast  
-Mipa=inline -tp shanghai-64 -Bstatic\_pgi

437.leslie3d: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse  
-Mvect=fuse -Msmartalloc=huge -Mprefetch=distance:8  
-Mprefetch=t0 -Mfprelaxed -tp shanghai-64 -Bstatic\_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2  
-LNO:prefetch\_ahead=1 -CG:load\_exe=0 -HP

465.tonto: -march=barcelona -Ofast -OPT:alias=no\_f90\_pointer\_alias  
-LNO:blocking=off -CG:load\_exe=1 -IPA:plimit=525 -HP

### Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m

436.cactusADM: -fastsse -Mconcur -Msmartalloc=huge -Mfprelaxed -Mipa=fast  
-Mipa=inline -tp shanghai-64 -Bstatic\_pgi

454.calculix: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse  
-Mvect=short -Msmartalloc=huge -Mprefetch=t0 -Mpre

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 263

PowerEdge M905 (AMD Opteron 8431, 2.40 GHz)

SPECfp\_rate\_base2006 = 241

CPU2006 license: 55

Test date: Jul-2009

Test sponsor: Dell Inc.

Hardware Availability: Jul-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

## Peak Optimization Flags (Continued)

454.calculix (continued):

-Mfprelaxed -tp shanghai-64 -Bstatic\_pgi

481.wrf: -fastsse -Mvect=noaltcode -Msmartalloc=huge

-Mprefetch=distance:8 -Mfprelaxed -tp shanghai-64

-Bstatic\_pgi

## Peak Other Flags

C benchmarks:

-Mipa=jobs:4(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks:

410.bwaves: -Mipa=jobs:4

434.zeusmp: -Mipa=jobs:4

437.leslie3d: -Mipa=jobs:4(pass 2)

Benchmarks using both Fortran and C:

436.cactusADM: -Mipa=jobs:4

454.calculix: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.20090710.html](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.html)

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revB.html>

<http://www.spec.org/cpu2006/flags/amd-platform.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.20090710.xml](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.xml)

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revB.xml>

<http://www.spec.org/cpu2006/flags/amd-platform.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 263

PowerEdge M905 (AMD Opteron 8431, 2.40 GHz)

SPECfp\_rate\_base2006 = 241

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jul-2009

Hardware Availability: Jul-2009

Software Availability: Apr-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 03:14:55 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 5 August 2009.