



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

### SPECfp<sup>®</sup>\_rate2006 = 126

### Motherboard H8DA3-2, AMD Opteron 2423 HE

### SPECfp\_rate\_base2006 = 115

CPU2006 license: 001176


Test date: Jul-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

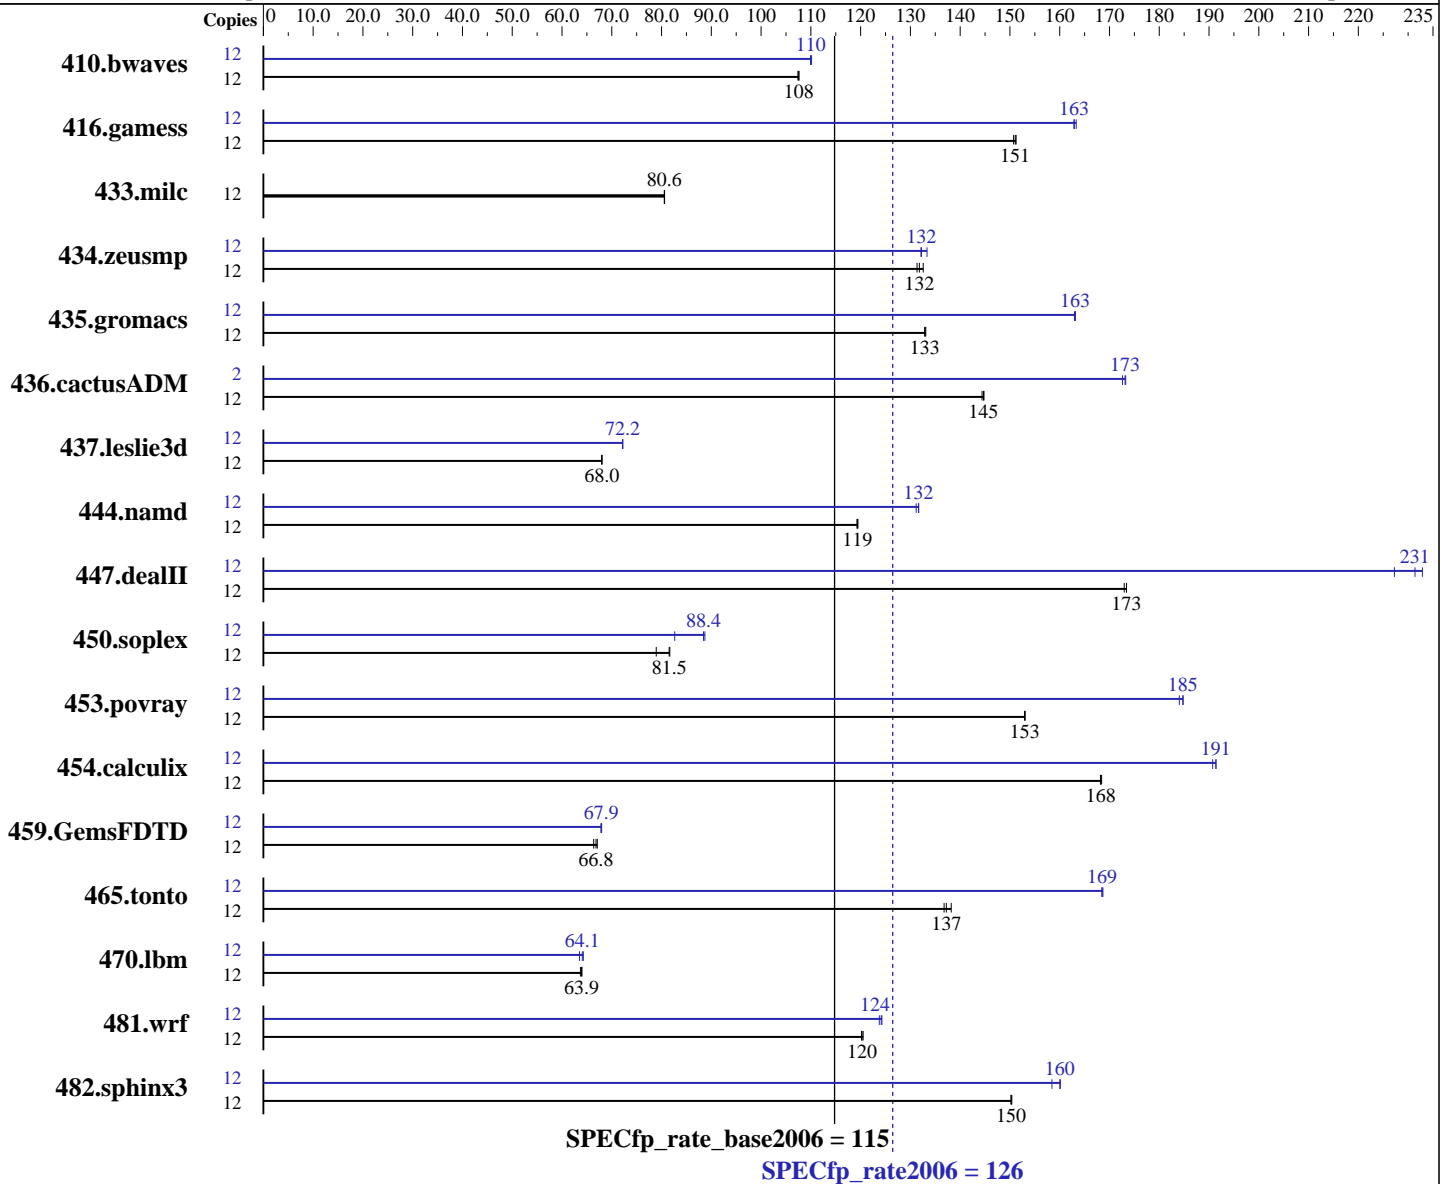

#### Hardware

CPU Name: AMD Opteron 2423 HE  
 CPU Characteristics:  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

#### Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Advanced Platform, Kernel 2.6.18-128.el5  
 Compiler: PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite (from AMD)  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 2 (Local multiuser without remote network)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECfp\_rate2006 = **126**

Motherboard H8DA3-2, AMD Opteron 2423 HE

SPECfp\_rate\_base2006 = **115**

CPU2006 license: 001176

Test date: Jul-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

L3 Cache: 6 MB I+D on chip per chip  
Other Cache: None  
Memory: 32 GB (8x4 GB, DDR2-800, CL5, Reg, Dual Rank)  
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: binutils 2.18

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	1518	107	<b><u>1516</u></b>	<b><u>108</u></b>	1515	108	12	1481	110	1483	110	<b><u>1483</u></b>	<b><u>110</u></b>
416.gamess	12	1554	151	1559	151	<b><u>1555</u></b>	<b><u>151</u></b>	12	1439	163	<b><u>1442</u></b>	<b><u>163</u></b>	1443	163
433.milc	12	1367	80.6	1367	80.6	<b><u>1367</u></b>	<b><u>80.6</u></b>	12	1367	80.6	1367	80.6	<b><u>1367</u></b>	<b><u>80.6</u></b>
434.zeusmp	12	824	133	831	131	<b><u>829</u></b>	<b><u>132</u></b>	12	827	132	819	133	<b><u>826</u></b>	<b><u>132</u></b>
435.gromacs	12	<b><u>645</u></b>	<b><u>133</u></b>	644	133	645	133	12	525	163	<b><u>525</u></b>	<b><u>163</u></b>	526	163
436.cactusADM	12	990	145	993	144	<b><u>991</u></b>	<b><u>145</u></b>	2	<b><u>138</u></b>	<b><u>173</u></b>	138	173	138	173
437.leslie3d	12	1658	68.0	1659	68.0	<b><u>1659</u></b>	<b><u>68.0</u></b>	12	<b><u>1562</u></b>	<b><u>72.2</u></b>	1562	72.2	1564	72.1
444.namd	12	807	119	<b><u>806</u></b>	<b><u>119</u></b>	806	119	12	734	131	731	132	<b><u>731</u></b>	<b><u>132</u></b>
447.dealII	12	794	173	<b><u>792</u></b>	<b><u>173</u></b>	792	173	12	604	227	590	233	<b><u>593</u></b>	<b><u>231</u></b>
450.soplex	12	1268	78.9	<b><u>1228</u></b>	<b><u>81.5</u></b>	1226	81.7	12	1211	82.6	1128	88.7	<b><u>1132</u></b>	<b><u>88.4</u></b>
453.povray	12	417	153	417	153	<b><u>417</u></b>	<b><u>153</u></b>	12	<b><u>346</u></b>	<b><u>185</u></b>	345	185	347	184
454.calculix	12	588	168	589	168	<b><u>588</u></b>	<b><u>168</u></b>	12	519	191	517	191	<b><u>517</u></b>	<b><u>191</u></b>
459.GemsFDTD	12	1918	66.4	<b><u>1905</u></b>	<b><u>66.8</u></b>	1898	67.1	12	<b><u>1875</u></b>	<b><u>67.9</u></b>	1877	67.8	1873	68.0
465.tonto	12	863	137	<b><u>860</u></b>	<b><u>137</u></b>	854	138	12	700	169	<b><u>701</u></b>	<b><u>169</u></b>	701	168
470.lbm	12	2588	63.7	2576	64.0	<b><u>2579</u></b>	<b><u>63.9</u></b>	12	2596	63.5	2565	64.3	<b><u>2573</u></b>	<b><u>64.1</u></b>
481.wrf	12	1115	120	1112	121	<b><u>1114</u></b>	<b><u>120</u></b>	12	<b><u>1080</u></b>	<b><u>124</u></b>	1083	124	1079	124
482.sphinx3	12	<b><u>1556</u></b>	<b><u>150</u></b>	1555	150	1557	150	12	1476	158	1461	160	<b><u>1462</u></b>	<b><u>160</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=5400 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECfp\_rate2006 = 126

Motherboard H8DA3-2, AMD Opteron 2423 HE

SPECfp\_rate\_base2006 = 115

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Jul-2009  
Hardware Availability: Jun-2009  
Software Availability: Apr-2009

### General Notes

Environment variables set by runspec before the start of the run:  
HUGETLB\_LIMIT = "450"  
LD\_LIBRARY\_PATH = "/spec/amd0905is-libs/64:/spec/amd0905is-libs/32"  
NCPUS = "6"  
PGI\_HUGE\_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<a href="http://developer.amd.com/cpu/open64">http://developer.amd.com/cpu/open64</a>.

System was tested in an open environment.  
To ensure system stability, a 550W (minimum) ATX power  
[ 4-pin (+12V), 8-pin (+12V) and 24-pin are required ]

Product description can be obtained at:  
<http://www.supermicro.com/Aplus/motherboard/Opteron2000/MCP55/H8DA3-2.cfm>

### Base Compiler Invocation

C benchmarks:  
pgcc

C++ benchmarks:  
pgcpp

Fortran benchmarks:  
pgf95

Benchmarks using both Fortran and C:  
pgcc pgf95

### Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -Mnomain  
436.cactusADM: -DSPEC\_CPU\_LP64 -Mnomain  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -Mnomain  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

**SPECfp\_rate2006 = 126**

Motherboard H8DA3-2, AMD Opteron 2423 HE

**SPECfp\_rate\_base2006 = 115**

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Jul-2009  
**Hardware Availability:** Jun-2009  
**Software Availability:** Apr-2009

## Base Portability Flags (Continued)

481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp shanghai-64 -Bstatic\_pgi

C++ benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed --zc\_eh -Mipa=fast  
-Mipa=inline -tp shanghai-64 -Bstatic\_pgi

Fortran benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mvect=short -Mipa=fast  
-Mipa=inline -tp shanghai-64 -Bstatic\_pgi

Benchmarks using both Fortran and C:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp shanghai-64 -Mvect=short -Bstatic\_pgi

## Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Fortran benchmarks:

-Mipa=jobs:4

Benchmarks using both Fortran and C:

-Mipa=jobs:4

## Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks (except as noted below):

openCC

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp\_rate2006 = 126

Motherboard H8DA3-2, AMD Opteron 2423 HE

SPECfp\_rate\_base2006 = 115

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Jul-2009  
Hardware Availability: Jun-2009  
Software Availability: Apr-2009

## Peak Compiler Invocation (Continued)

444.namd: pgcpp

Fortran benchmarks (except as noted below):

openf95

410.bwaves: pgf95

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

435.gromacs: opencc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64 -Mnomain  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -Mnomain  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -fastsse -Msmartalloc=huge -Mprefetch=t0 -Mloop32  
-Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64  
-Bstatic\_pgi

482.sphinx3: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse  
-Mfprelaxed -Msmartalloc -tp shanghai-64 -Bstatic\_pgi

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp\_rate2006 = 126

Motherboard H8DA3-2, AMD Opteron 2423 HE

SPECfp\_rate\_base2006 = 115

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Jul-2009  
Hardware Availability: Jun-2009  
Software Availability: Apr-2009

## Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)  
-Mipa=inline(pass 2) -fastsse -Munroll=n:4 -Munroll=m:8  
-Msmartalloc=huge -Mnodepchk -Mfprelaxed --zc\_eh  
-tp shanghai-64 -Bstatic\_pgi

447.dealII: -march=barcelona -Ofast -static -INLINE:aggressive=on  
-LNO:opt=0 -Wf,-fno-exceptions -m32 -OPT:unroll\_times\_max=8  
-OPT:unroll\_size=256 -OPT:unroll\_level=2 -HP:bdt=2m:heap=2m  
-GRA:unspill=on -CG:cmp\_peep=on -TENV:frame\_pointer=off

450.soplex: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -INLINE:aggressive=on  
-OPT:IEEE\_arith=3 -OPT:IEEE\_NaN\_Inf=off  
-OPT:fold\_unsigned\_relops=on -OPT:malloc\_alg=1  
-CG:load\_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on  
-HP:bdt=2m:heap=2m

Fortran benchmarks:

410.bwaves: -fastsse -Msmartalloc -Mprefetch=nta -Mfprelaxed  
-Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic\_pgi

416.gamess: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3  
-OPT:unroll\_size=256 -HP:bdt=2m:heap=2m

434.zeusmp: -fastsse -Mfprelaxed -Mprefetch=distance:8 -Mprefetch=t0  
-Msmartalloc=huge -Msmartalloc=hugebss -Mipa=fast  
-Mipa=inline -tp shanghai-64 -Bstatic\_pgi

437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse  
-Mvect=fuse -Msmartalloc=huge -Mprefetch=distance:8  
-Mprefetch=t0 -Mfprelaxed -tp shanghai-64 -Bstatic\_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2  
-LNO:prefetch\_ahead=1 -CG:load\_exe=0 -HP

465.tonto: -march=barcelona -Ofast -OPT:alias=no\_f90\_pointer\_alias  
-LNO:blocking=off -CG:load\_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp\_rate2006 = 126

Motherboard H8DA3-2, AMD Opteron 2423 HE

SPECfp\_rate\_base2006 = 115

CPU2006 license: 001176

Test date: Jul-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

## Peak Optimization Flags (Continued)

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m

436.cactusADM: -fastsse -Mconcur -Msmartalloc=huge -Mfprelaxed -Mipa=fast  
-Mipa=inline -tp shanghai-64 -Bstatic\_pgi

454.calculix: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse  
-Mvect=short -Msmartalloc=huge -Mprefetch=t0 -Mpre  
-Mfprelaxed -tp shanghai-64 -Bstatic\_pgi

481.wrf: -fastsse -Mvect=noaltcode -Msmartalloc=huge  
-Mprefetch=distance:8 -Mfprelaxed -tp shanghai-64  
-Bstatic\_pgi

## Peak Other Flags

C benchmarks:

-Mipa=jobs:4(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks:

410.bwaves: -Mipa=jobs:4

434.zeusmp: -Mipa=jobs:4

437.leslie3d: -Mipa=jobs:4(pass 2)

Benchmarks using both Fortran and C:

436.cactusADM: -Mipa=jobs:4

454.calculix: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd-platform.20090728.html>

[http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.20090710.html](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.html)

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd-platform.20090728.xml>

[http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.20090710.xml](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.xml)

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revB.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp\_rate2006 = 126

Motherboard H8DA3-2, AMD Opteron 2423 HE

SPECfp\_rate\_base2006 = 115

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jul-2009

Hardware Availability: Jun-2009

Software Availability: Apr-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 03:28:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 18 August 2009.