



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp[®]_rate2006 = 164

PRIMERGY BX920 S1, Intel Xeon E5530, 2.40 GHz

SPECfp_rate_base2006 = 158

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Aug-2009

Hardware Availability: May-2009

Software Availability: Feb-2009

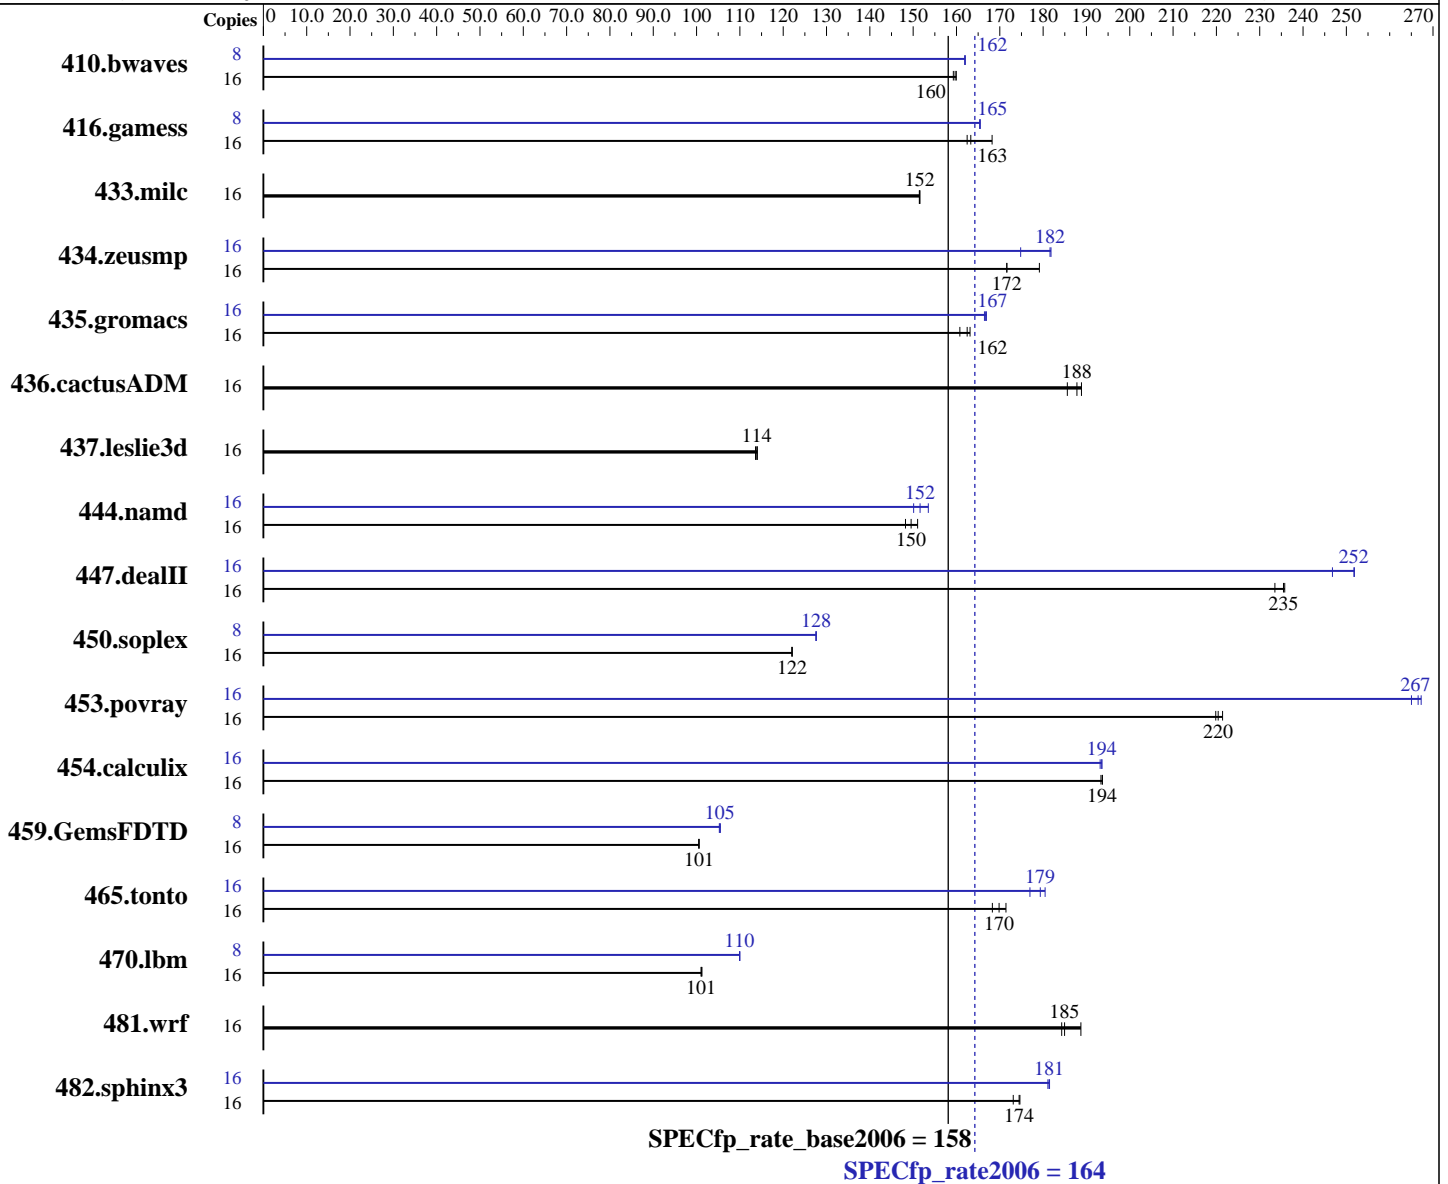

Hardware

CPU Name: Intel Xeon E5530
 CPU Characteristics: Intel Turbo Boost Technology up to 2.67 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smpp
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080, l_cprof_p_11.0.080
 Auto Parallel: No
 File System: ext3
 System State: Multi-User Run Level 3
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = **164**

PRIMERGY BX920 S1, Intel Xeon E5530, 2.40 GHz

SPECfp_rate_base2006 = **158**

CPU2006 license: 19

Test date: Aug-2009

Test sponsor: Fujitsu

Hardware Availability: May-2009

Tested by: Fujitsu

Software Availability: Feb-2009

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (6x4 GB + 3x8 GB PC3-10600R, 2 rank, CL9-9-9, ECC, see add'l detail in notes)
Disk Subsystem: 1 x SATA, 250 GB, 7200 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1365	159	1359	160	1362	160	8	671	162	671	162	672	162
416.gamess	16	1928	162	1918	163	1862	168	8	947	165	947	165	947	165
433.milc	16	969	152	969	152	970	151	16	969	152	969	152	970	151
434.zeusmp	16	848	172	848	172	813	179	16	802	182	801	182	833	175
435.gromacs	16	703	162	700	163	711	161	16	685	167	684	167	686	166
436.cactusADM	16	1018	188	1030	186	1012	189	16	1018	188	1030	186	1012	189
437.leslie3d	16	1319	114	1324	114	1321	114	16	1319	114	1324	114	1321	114
444.namd	16	858	150	850	151	866	148	16	855	150	836	153	846	152
447.dealII	16	777	235	776	236	784	234	16	727	252	742	247	727	252
450.soplex	16	1093	122	1094	122	1093	122	8	523	128	523	128	523	128
453.povray	16	384	221	386	220	387	220	16	318	267	319	267	321	265
454.calculix	16	683	193	682	194	682	194	16	683	193	682	194	682	194
459.GemsFDTD	16	1688	101	1689	101	1688	101	8	806	105	805	105	806	105
465.tonto	16	927	170	936	168	918	171	16	872	180	878	179	890	177
470.lbm	16	2171	101	2175	101	2175	101	8	999	110	1000	110	1000	110
481.wrf	16	947	189	970	184	966	185	16	947	189	970	184	966	185
482.sphinx3	16	1788	174	1801	173	1786	175	16	1718	181	1719	181	1722	181

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind processes to cores and its local memory.
Details may be found in the config file.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 164

PRIMERGY BX920 S1, Intel Xeon E5530, 2.40 GHz

SPECfp_rate_base2006 = 158

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Aug-2009

Hardware Availability: May-2009

Software Availability: Feb-2009

Platform Notes

The system automatically configures the memory to run at 1066 MHz.

General Notes

For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.deallI: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 164

PRIMERGY BX920 S1, Intel Xeon E5530, 2.40 GHz

SPECfp_rate_base2006 = 158

CPU2006 license: 19

Test date: Aug-2009

Test sponsor: Fujitsu

Hardware Availability: May-2009

Tested by: Fujitsu

Software Availability: Feb-2009

Base Optimization Flags (Continued)

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 164

PRIMERGY BX920 S1, Intel Xeon E5530, 2.40 GHz

SPECfp_rate_base2006 = 158

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Aug-2009
Hardware Availability: May-2009
Software Availability: Feb-2009

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -opt-prefetch

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 164

PRIMERGY BX920 S1, Intel Xeon E5530, 2.40 GHz

SPECfp_rate_base2006 = 158

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Aug-2009

Hardware Availability: May-2009

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090901.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090901.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 02:08:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 September 2009.