



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sun Microsystems

## SPECint<sup>®</sup>\_rate2006 = 195

### Sun Fire X4140 (AMD Opteron 2435 2.6GHz)

## SPECint\_rate\_base2006 = 153

CPU2006 license: 6


Test date: Aug-2009

Test sponsor: Sun Microsystems

Hardware Availability: Jul-2009

Tested by: Sun Microsystems

Software Availability: Apr-2009

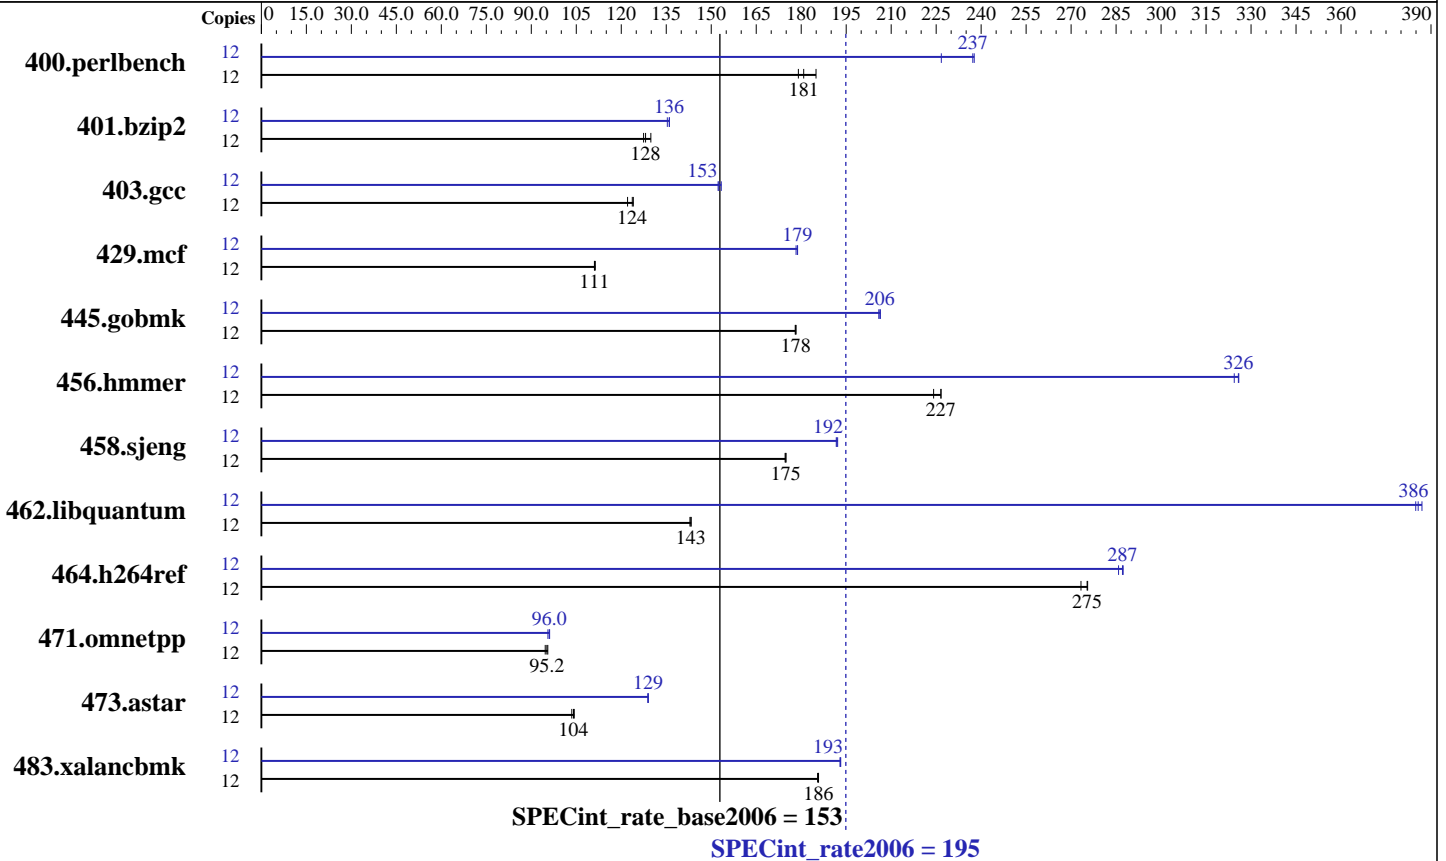

### Hardware

CPU Name: AMD Opteron 2435  
 CPU Characteristics:  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 6 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 32 GB (8x4GB, DDR2-667, CL5, Reg, Dual Rank)  
 Disk Subsystem: 1 x 300 GB SATA 10 K RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5 for x86\_64  
 Compiler: PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: binutils 2.18 SmartHeap 8.1 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sun Microsystems

SPECint\_rate2006 = 195

Sun Fire X4140 (AMD Opteron 2435 2.6GHz)

SPECint\_rate\_base2006 = 153

CPU2006 license: 6

Test date: Aug-2009

Test sponsor: Sun Microsystems

Hardware Availability: Jul-2009

Tested by: Sun Microsystems

Software Availability: Apr-2009

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	634	185	655	179	<b>648</b>	<b>181</b>	12	517	227	<b>494</b>	<b>237</b>	493	238
401.bzip2	12	892	130	909	127	<b>904</b>	<b>128</b>	12	<b>852</b>	<b>136</b>	851	136	855	135
403.gcc	12	<b>781</b>	<b>124</b>	779	124	791	122	12	630	153	634	152	<b>633</b>	<b>153</b>
429.mcf	12	983	111	986	111	<b>985</b>	<b>111</b>	12	<b>612</b>	<b>179</b>	612	179	614	178
445.gobmk	12	<b>707</b>	<b>178</b>	707	178	706	178	12	<b>610</b>	<b>206</b>	611	206	610	206
456.hammer	12	494	227	499	224	<b>494</b>	<b>227</b>	12	<b>344</b>	<b>326</b>	344	326	345	324
458.sjeng	12	<b>830</b>	<b>175</b>	830	175	831	175	12	<b>757</b>	<b>192</b>	757	192	756	192
462.libquantum	12	1740	143	<b>1736</b>	<b>143</b>	1735	143	12	646	385	<b>645</b>	<b>386</b>	643	387
464.h264ref	12	972	273	964	276	<b>964</b>	<b>275</b>	12	929	286	<b>925</b>	<b>287</b>	924	287
471.omnetpp	12	<b>788</b>	<b>95.2</b>	792	94.6	785	95.5	12	<b>781</b>	<b>96.0</b>	785	95.5	780	96.1
473.astar	12	807	104	<b>809</b>	<b>104</b>	814	104	12	654	129	<b>653</b>	<b>129</b>	653	129
483.xalancbmk	12	<b>446</b>	<b>186</b>	446	185	446	186	12	429	193	429	193	<b>429</b>	<b>193</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=5400 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## Platform Notes

Default BIOS settings used except:  
DCT Unganged Mode set to "Always" to enable Unganged Mode

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_LIMIT = "450"

LD\_LIBRARY\_PATH = "/data1/SPECcpu2006v1.1/amd0905is-libs/64:/data1/SPECcpu2006v1.1/amd0905is-libs/32"

PGI\_HUGE\_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<a href="http://developer.amd.com/cpu/open64">http://developer.amd.com/cpu/open64</a>.



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint\_rate2006 = 195

Sun Fire X4140 (AMD Opteron 2435 2.6GHz)

SPECint\_rate\_base2006 = 153

CPU2006 license: 6

Test date: Aug-2009

Test sponsor: Sun Microsystems

Hardware Availability: Jul-2009

Tested by: Sun Microsystems

Software Availability: Apr-2009

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmcr: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalanbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-march=barcelona -Ofast -CG:local\_sched\_alg=1 -HP:bdt=2m:heap=2m

C++ benchmarks:  
-march=barcelona -Ofast -m32 -INLINE:aggressive=on  
-L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

## Peak Compiler Invocation

C benchmarks (except as noted below):  
opencc

456.hmmcr: pgcc

C++ benchmarks (except as noted below):  
openCC

473.astar: pgcpp



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint\_rate2006 = 195

Sun Fire X4140 (AMD Opteron 2435 2.6GHz)

SPECint\_rate\_base2006 = 153

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Aug-2009

Hardware Availability: Jul-2009

Software Availability: Apr-2009

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalanbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
               -OPT:unroll_times_max=8 -OPT:unroll_size=256
               -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
               -CG:local_sched_alg=1 -CG:unroll_fb_req=on
               -HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
            -OPT:unroll_size=0 -OPT:Ofast -OPT:goto=off
            -INLINE:aggressive=on -CG:local_sched_alg=1 -m3dnw
            -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
          -LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
          -HP:bdt=2m:heap=2m -GRA:unspill=on

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
          -CG:gcm=off -GRA:prioritize_by_density=on -m32
          -HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
            -OPT:unroll_times_max=8 -OPT:unroll_size=256
            -OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
            -IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
            -LNO:ignore_feedback=off -CG:p2align=on
            -CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -fastsse -Mvect=partial -Munroll=n:8 -Msmartalloc=huge
            -Msafeptr -Mprefetch=t0 -Mfprelaxed -Mipa=const -Mipa=ptr
            -Mipa=arg -Mipa=inline -tp shanghai-64 -Bstatic_pgi

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint\_rate2006 = 195

Sun Fire X4140 (AMD Opteron 2435 2.6GHz)

SPECint\_rate\_base2006 = 153

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Aug-2009

Hardware Availability: Jul-2009

Software Availability: Apr-2009

## Peak Optimization Flags (Continued)

458.sjeng: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -ipa -LNO:ignore\_feedback=off  
 -LNO:full\_unroll=10 -LNO:fusion=0 -LNO:fission=2  
 -IPA:pu\_reorder=2 -CG:ptr\_load\_use=0  
 -OPT:unroll\_times\_max=8 -INLINE:aggressive=on  
 -HP:bdt=2m:heap=2m

462.libquantum: -march=barcelona -Ofast -LNO:pf2=0 -CG:gcm=off  
 -CG:use\_prefetchnta=on -CG:cmp\_peep=on -WOPT:aggstr=0  
 -HP:bdt=2m:heap=2m -OPT:alias=disjoint  
 -INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000

464.h264ref: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -IPA:plimit=20000  
 -OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr\_load\_use=0  
 -CG:push\_pop\_int\_saved\_regs=off -HP:bdt=2m:heap=2m

C++ benchmarks:

471.omnetpp: -march=barcelona -Ofast -CG:gcm=off -INLINE:aggressive=on  
 -OPT:alias=disjoint -WOPT:if\_conv=0 -m32  
 -L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)  
 -Mipa=inline:6(pass 2) -fastsse -O4 -Msmartalloc=huge  
 -Msafeptr=global -Mfp relaxed --zc\_eh -tp shanghai-32  
 -Bstatic\_pgi

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32  
 -CG:cmp\_peep=on -GRA:unspill=on -TENV:frame\_pointer=off  
 -L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

## Peak Other Flags

C benchmarks:

456.hmmmer: -Mipa=jobs:4

C++ benchmarks:

473.astar: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.html>

[http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.20090710.html](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.html)

<http://www.spec.org/cpu2006/flags/amd-platform.20090710.html>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint\_rate2006 = 195

Sun Fire X4140 (AMD Opteron 2435 2.6GHz)

SPECint\_rate\_base2006 = 153

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Aug-2009

Hardware Availability: Jul-2009

Software Availability: Apr-2009

You can also download the XML flags sources by saving the following links:

- <http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.xml>
- [http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.20090710.xml](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.xml)
- <http://www.spec.org/cpu2006/flags/amd-platform.20090710.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 02:12:27 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 1 September 2009.