



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®\_rate2006 = 345

PowerEdge M905 (AMD Opteron 8425 HE, 2.10 GHz)

SPECint\_rate\_base2006 = 268

CPU2006 license: 55


Test date: Aug-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

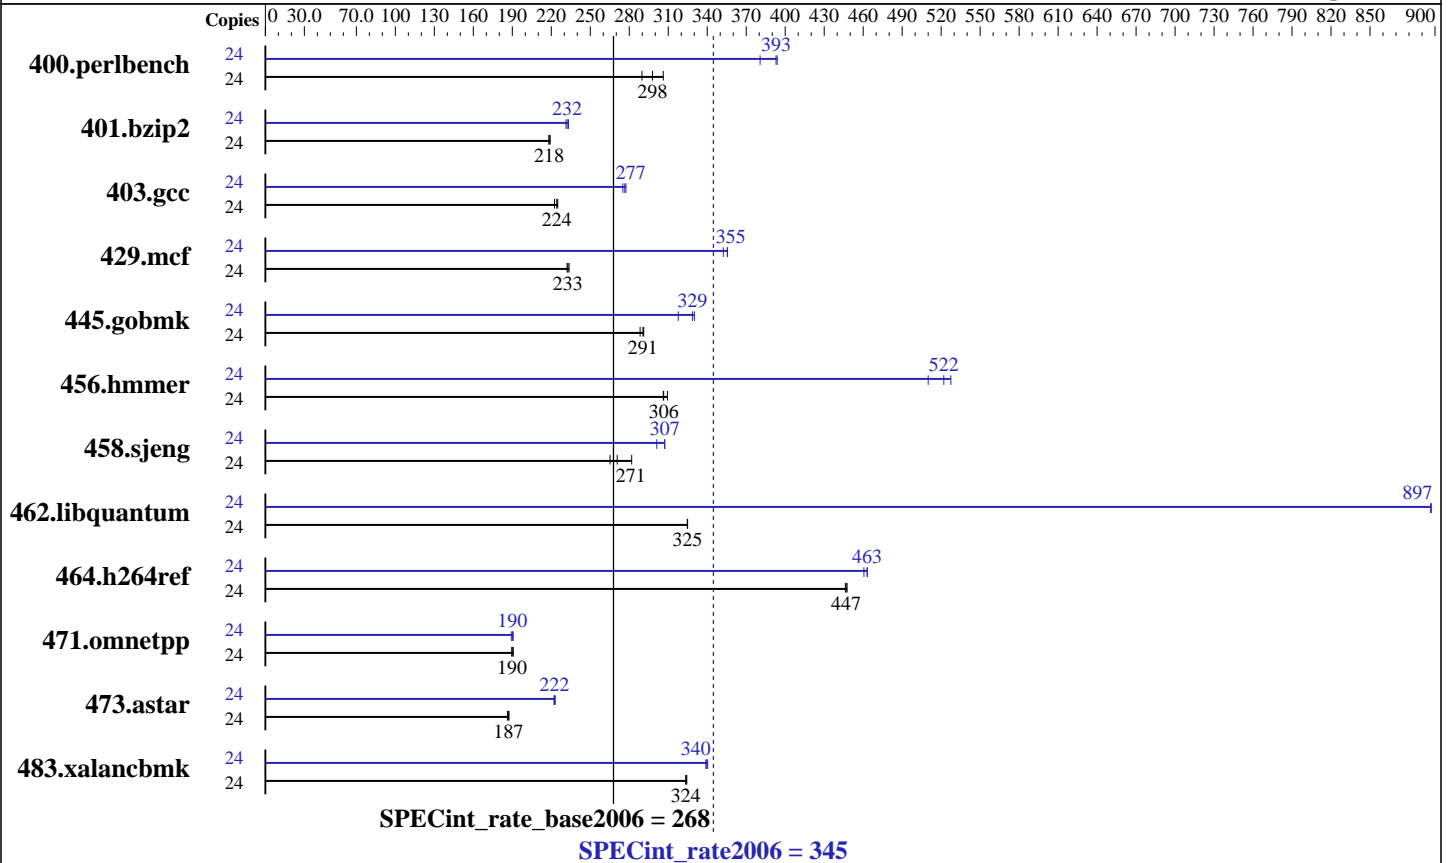

### Hardware

CPU Name: AMD Opteron 8425 HE  
 CPU Characteristics: 2100  
 CPU MHz: 2100  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip  
 CPU(s) orderable: 4 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 6 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 64 GB (16 x 4 GB DDR2-800)  
 Disk Subsystem: 1 x 73 GB 15000 RPM SAS  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5  
 Compiler: PGI Server Complete Version 8.0  
 x86 Open64 4.2.2 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: binutils 2.18  
 SmartHeap 8.1 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 345

PowerEdge M905 (AMD Opteron 8425 HE, 2.10 GHz)

SPECint\_rate\_base2006 = 268

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Aug-2009  
Hardware Availability: Aug-2009  
Software Availability: Apr-2009

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	24	766	306	809	290	<b>787</b>	<b>298</b>	24	616	381	595	394	<b>597</b>	<b>393</b>		
401.bzip2	24	1057	219	<b>1061</b>	<b>218</b>	1061	218	24	1001	231	993	233	<b>997</b>	<b>232</b>		
403.gcc	24	859	225	868	222	<b>862</b>	<b>224</b>	24	696	277	<b>699</b>	<b>277</b>	702	275		
429.mcf	24	943	232	<b>940</b>	<b>233</b>	937	234	24	<b>616</b>	<b>355</b>	621	352	616	356		
445.gobmk	24	873	288	<b>867</b>	<b>291</b>	865	291	24	<b>766</b>	<b>329</b>	763	330	793	318		
456.hammer	24	<b>731</b>	<b>306</b>	724	309	731	306	24	425	527	<b>429</b>	<b>522</b>	439	510		
458.sjeng	24	<b>1073</b>	<b>271</b>	1030	282	1095	265	24	<b>945</b>	<b>307</b>	945	307	964	301		
462.libquantum	24	1532	325	<b>1531</b>	<b>325</b>	1531	325	24	554	897	554	897	<b>554</b>	<b>897</b>		
464.h264ref	24	1187	448	<b>1189</b>	<b>447</b>	1190	446	24	1147	463	1153	461	<b>1147</b>	<b>463</b>		
471.omnetpp	24	791	190	<b>790</b>	<b>190</b>	786	191	24	793	189	787	191	<b>788</b>	<b>190</b>		
473.astar	24	899	187	<b>901</b>	<b>187</b>	905	186	24	759	222	755	223	<b>757</b>	<b>222</b>		
483.xalancbmk	24	511	324	512	324	<b>512</b>	<b>324</b>	24	<b>488</b>	<b>340</b>	487	340	489	339		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=10800 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## Platform Notes

HyperTransport Technology = HT 1 (Default = HT 3)

## General Notes

Environment variables set by runspec before the start of the run:  
HUGETLB\_LIMIT = "450"  
LD\_LIBRARY\_PATH = "/root/cpu2006-1.1/amd0905is-libs/64:/root/cpu2006-1.1/amd0905is-libs/32"  
PGI\_HUGE\_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 345

PowerEdge M905 (AMD Opteron 8425 HE, 2.10 GHz)

SPECint\_rate\_base2006 = 268

CPU2006 license: 55

Test date: Aug-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmcr: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-march=barcelona -Ofast -CG:local\_sched\_alg=1 -HP:bdt=2m:heap=2m

C++ benchmarks:  
-march=barcelona -Ofast -m32 -INLINE:aggressive=on  
-L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

## Peak Compiler Invocation

C benchmarks (except as noted below):  
opencc

456.hmmcr: pgcc

C++ benchmarks (except as noted below):  
openCC

473.astar: pgcpp



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 345

PowerEdge M905 (AMD Opteron 8425 HE, 2.10 GHz)

SPECint\_rate\_base2006 = 268

CPU2006 license: 55

Test date: Aug-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalanbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
               -OPT:unroll_times_max=8 -OPT:unroll_size=256
               -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
               -CG:local_sched_alg=1 -CG:unroll_fb_req=on
               -HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
            -OPT:unroll_size=0 -OPT:Ofast -OPT:goto=off
            -INLINE:aggressive=on -CG:local_sched_alg=1 -m3dnw
            -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
          -LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
          -HP:bdt=2m:heap=2m -GRA:unspill=on

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
          -CG:gcm=off -GRA:prioritize_by_density=on -m32
          -HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
            -OPT:unroll_times_max=8 -OPT:unroll_size=256
            -OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
            -IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
            -LNO:ignore_feedback=off -CG:p2align=on
            -CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -fastsse -Mvect=partial -Munroll=n:8 -Msmartalloc=huge
            -Msafeptr -Mprefetch=t0 -Mfprelaxed -Mipa=const -Mipa=ptr
            -Mipa=arg -Mipa=inline -tp shanghai-64 -Bstatic_pgi

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 345

PowerEdge M905 (AMD Opteron 8425 HE, 2.10 GHz)

SPECint\_rate\_base2006 = 268

CPU2006 license: 55

Test date: Aug-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

## Peak Optimization Flags (Continued)

458.sjeng: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -ipa -LNO:ignore\_feedback=off  
 -LNO:full\_unroll=10 -LNO:fusion=0 -LNO:fission=2  
 -IPA:pu\_reorder=2 -CG:ptr\_load\_use=0  
 -OPT:unroll\_times\_max=8 -INLINE:aggressive=on  
 -HP:bdt=2m:heap=2m

462.libquantum: -march=barcelona -Ofast -LNO:pf2=0 -CG:gcm=off  
 -CG:use\_prefetchnta=on -CG:cmp\_peep=on -WOPT:aggstr=0  
 -HP:bdt=2m:heap=2m -OPT:alias=disjoint  
 -INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000

464.h264ref: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -IPA:plimit=20000  
 -OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr\_load\_use=0  
 -CG:push\_pop\_int\_saved\_regs=off -HP:bdt=2m:heap=2m

C++ benchmarks:

471.omnetpp: -march=barcelona -Ofast -CG:gcm=off -INLINE:aggressive=on  
 -OPT:alias=disjoint -WOPT:if\_conv=0 -m32  
 -L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)  
 -Mipa=inline:6(pass 2) -fastsse -O4 -Msmartalloc=huge  
 -Msafeptr=global -Mfprelaxed --zc\_eh -tp shanghai-32  
 -Bstatic\_pgi

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32  
 -CG:cmp\_peep=on -GRA:unspill=on -TENV:frame\_pointer=off  
 -L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

## Peak Other Flags

C benchmarks:

456.hmmmer: -Mipa=jobs:4

C++ benchmarks:

473.astar: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.20090914.html](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090914.html)

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.html>

<http://www.spec.org/cpu2006/flags/amd-platform.20090914.html>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 345

PowerEdge M905 (AMD Opteron 8425 HE, 2.10 GHz)

SPECint\_rate\_base2006 = 268

CPU2006 license: 55

Test date: Aug-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

You can also download the XML flags sources by saving the following links:

- [http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.20090914.xml](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090914.xml)
- <http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.xml>
- <http://www.spec.org/cpu2006/flags/amd-platform.20090914.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 03:41:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 14 September 2009.