



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

### SPECfp<sup>®</sup>\_rate2006 = 147

### Motherboard H8DA3-2, AMD Opteron 2439 SE

### SPECfp\_rate\_base2006 = 133

CPU2006 license: 001176


Test date: Aug-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

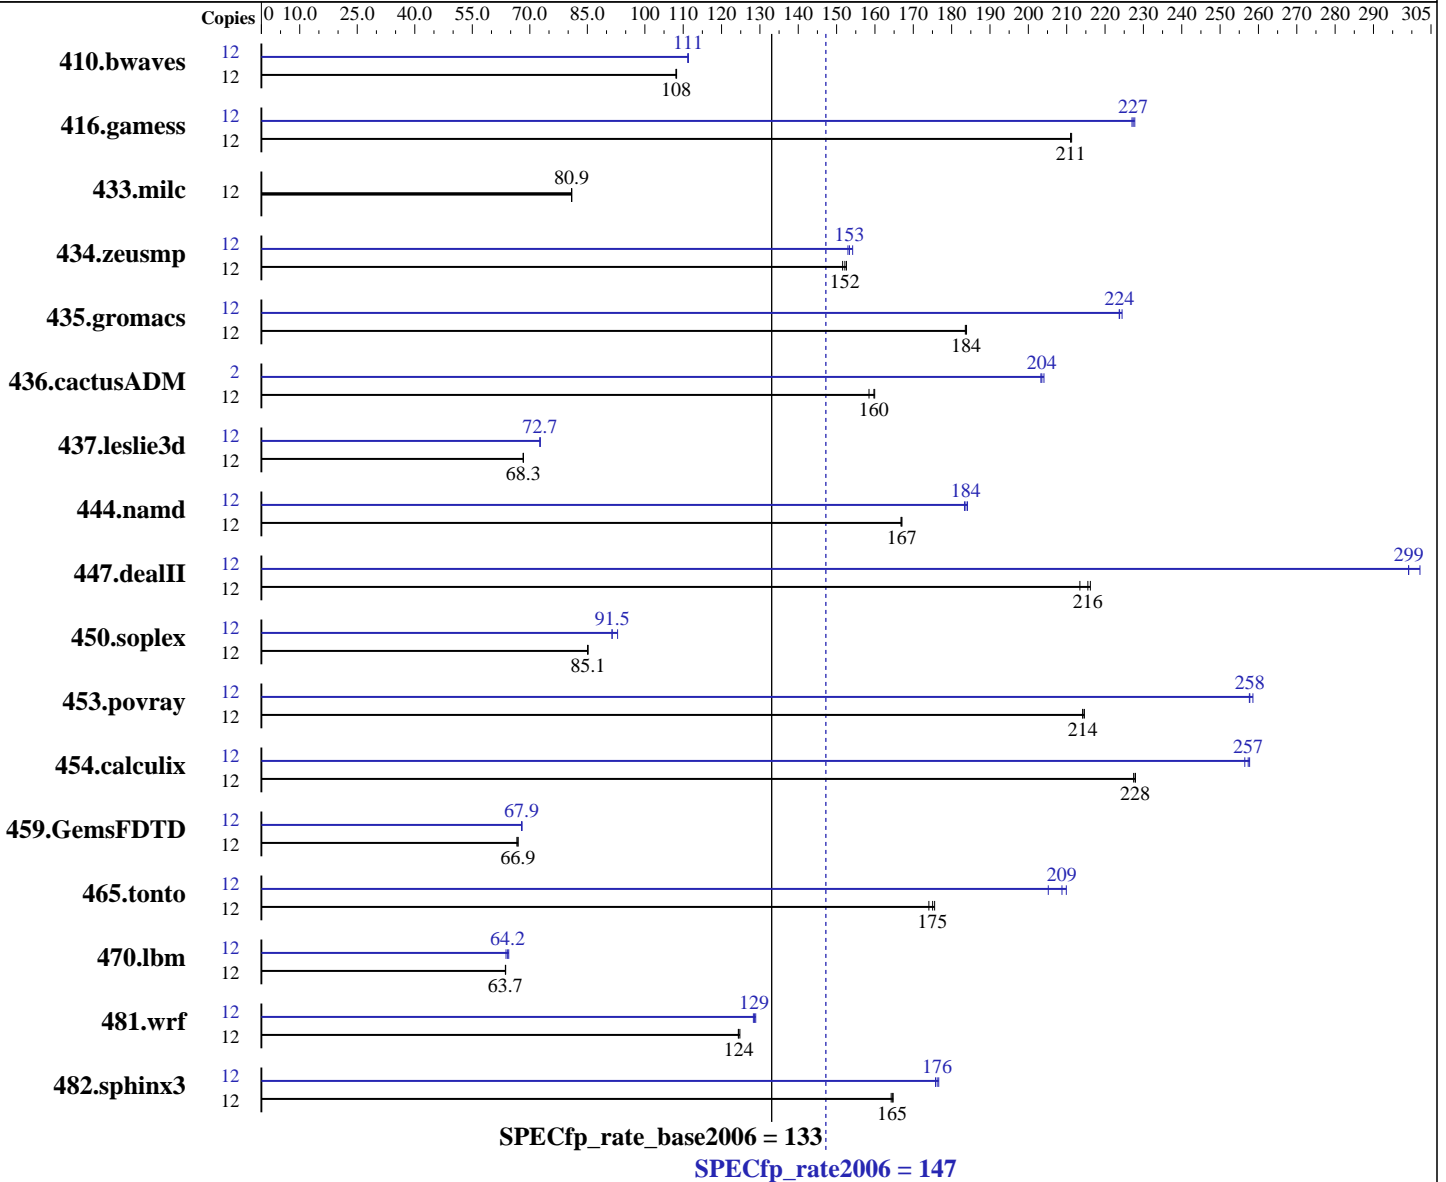

### Hardware

CPU Name: AMD Opteron 2439 SE  
 CPU Characteristics:  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Advanced Platform, Kernel 2.6.18-128.el5  
 Compiler: PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite (from AMD)  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 2 (Local multiuser without remote network)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECfp\_rate2006 = 147

Motherboard H8DA3-2, AMD Opteron 2439 SE

SPECfp\_rate\_base2006 = 133

CPU2006 license: 001176

Test date: Aug-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

L3 Cache: 6 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 32 GB (8x4 GB, DDR2-800, CL5, Reg, Dual Rank)  
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
 Other Hardware: None

Peak Pointers: 32/64-bit  
 Other Software: binutils 2.18

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	1506	108	1508	108	<u>1507</u>	<u>108</u>	12	<u>1465</u>	<u>111</u>	1465	111	1467	111
416.gamess	12	1113	211	<u>1113</u>	<u>211</u>	1112	211	12	1035	227	1032	228	<u>1034</u>	<u>227</u>
433.milc	12	<u>1362</u>	<u>80.9</u>	1362	80.9	1361	80.9	12	<u>1362</u>	<u>80.9</u>	1362	80.9	1361	80.9
434.zeusmp	12	720	152	716	153	<u>718</u>	<u>152</u>	12	708	154	714	153	<u>712</u>	<u>153</u>
435.gromacs	12	467	184	466	184	<u>466</u>	<u>184</u>	12	382	224	383	224	<u>383</u>	<u>224</u>
436.cactusADM	12	905	158	897	160	<u>898</u>	<u>160</u>	2	118	203	117	204	<u>117</u>	<u>204</u>
437.leslie3d	12	<u>1651</u>	<u>68.3</u>	1652	68.3	1651	68.3	12	1552	72.7	1552	72.7	<u>1552</u>	<u>72.7</u>
444.namd	12	577	167	<u>576</u>	<u>167</u>	576	167	12	525	183	<u>524</u>	<u>184</u>	523	184
447.dealII	12	635	216	643	213	<u>637</u>	<u>216</u>	12	459	299	454	302	<u>459</u>	<u>299</u>
450.soplex	12	1175	85.2	1177	85.0	<u>1176</u>	<u>85.1</u>	12	<u>1094</u>	<u>91.5</u>	1095	91.4	1077	92.9
453.povray	12	297	215	<u>298</u>	<u>214</u>	298	214	12	248	258	<u>248</u>	<u>258</u>	247	259
454.calculix	12	434	228	435	227	<u>435</u>	<u>228</u>	12	384	258	386	256	<u>385</u>	<u>257</u>
459.GemsFDTD	12	<u>1903</u>	<u>66.9</u>	1902	66.9	1911	66.6	12	1873	68.0	1877	67.8	<u>1875</u>	<u>67.9</u>
465.tonto	12	<u>675</u>	<u>175</u>	678	174	673	176	12	563	210	575	205	<u>566</u>	<u>209</u>
470.lbm	12	<u>2590</u>	<u>63.7</u>	2588	63.7	2591	63.6	12	2556	64.5	2585	63.8	<u>2568</u>	<u>64.2</u>
481.wrf	12	<u>1077</u>	<u>124</u>	1078	124	1074	125	12	1045	128	1040	129	<u>1042</u>	<u>129</u>
482.sphinx3	12	1420	165	<u>1421</u>	<u>165</u>	1424	164	12	<u>1327</u>	<u>176</u>	1324	177	1330	176

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
 'numactl' was used to bind copies to the cores.  
 See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=5400 in /etc/sysctl.conf  
 mount -t hugetlbfs nodev /mnt/hugepages



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp\_rate2006 = 147

Motherboard H8DA3-2, AMD Opteron 2439 SE

SPECfp\_rate\_base2006 = 133

CPU2006 license: 001176

Test date: Aug-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_LIMIT = "450"

LD\_LIBRARY\_PATH = "/spec/amd0905is-libs/64:/spec/amd0905is-libs/32"

NCPUS = "6"

PGI\_HUGE\_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

System was tested in an open environment.

To ensure system stability, a 550W (minimum) ATX power supply [ 4-pin (+12V), 8-pin (+12V) and 24-pin are required ]

Product description can be obtained at:

<http://www.supermicro.com/Aplus/motherboard/Opteron2000/MCP55/H8DA3-2.cfm>

## Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -Mnomain  
 436.cactusADM: -DSPEC\_CPU\_LP64 -Mnomain  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -Mnomain  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

**SPECfp\_rate2006 = 147**

Motherboard H8DA3-2, AMD Opteron 2439 SE

**SPECfp\_rate\_base2006 = 133**

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Aug-2009  
**Hardware Availability:** Jun-2009  
**Software Availability:** Apr-2009

## Base Portability Flags (Continued)

481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp shanghai-64 -Bstatic\_pgi

C++ benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed --zc\_eh -Mipa=fast  
-Mipa=inline -tp shanghai-64 -Bstatic\_pgi

Fortran benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mvect=short -Mipa=fast  
-Mipa=inline -tp shanghai-64 -Bstatic\_pgi

Benchmarks using both Fortran and C:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp shanghai-64 -Mvect=short -Bstatic\_pgi

## Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Fortran benchmarks:

-Mipa=jobs:4

Benchmarks using both Fortran and C:

-Mipa=jobs:4

## Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks (except as noted below):

openCC

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp\_rate2006 = 147

Motherboard H8DA3-2, AMD Opteron 2439 SE

SPECfp\_rate\_base2006 = 133

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Aug-2009  
Hardware Availability: Jun-2009  
Software Availability: Apr-2009

## Peak Compiler Invocation (Continued)

444.namd: pgcpp

Fortran benchmarks (except as noted below):

openf95

410.bwaves: pgf95

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

435.gromacs: opencc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64 -Mnomain  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -Mnomain  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -fastsse -Msmartalloc=huge -Mprefetch=t0 -Mloop32  
-Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64  
-Bstatic\_pgi

482.sphinx3: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse  
-Mfprelaxed -Msmartalloc -tp shanghai-64 -Bstatic\_pgi

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp\_rate2006 = 147

Motherboard H8DA3-2, AMD Opteron 2439 SE

SPECfp\_rate\_base2006 = 133

CPU2006 license: 001176

Test date: Aug-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

## Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)  
 -Mipa=inline(pass 2) -fastsse -Munroll=n:4 -Munroll=m:8  
 -Msmartalloc=huge -Mnodepchk -Mfprelaxed --zc\_eh  
 -tp shanghai-64 -Bstatic\_pgi

447.dealIII: -march=barcelona -Ofast -static -INLINE:aggressive=on  
 -LNO:opt=0 -Wf,-fno-exceptions -m32 -OPT:unroll\_times\_max=8  
 -OPT:unroll\_size=256 -OPT:unroll\_level=2 -HP:bdt=2m:heap=2m  
 -GRA:unspill=on -CG:cmp\_peep=on -TENV:frame\_pointer=off

450.soplex: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -INLINE:aggressive=on  
 -OPT:IEEE\_arith=3 -OPT:IEEE\_NaN\_Inf=off  
 -OPT:fold\_unsigned\_relops=on -OPT:malloc\_alg=1  
 -CG:load\_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on  
 -HP:bdt=2m:heap=2m

Fortran benchmarks:

410.bwaves: -fastsse -Msmartalloc -Mprefetch=nta -Mfprelaxed  
 -Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic\_pgi

416.gamess: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3  
 -OPT:unroll\_size=256 -HP:bdt=2m:heap=2m

434.zeusmp: -fastsse -Mfprelaxed -Mprefetch=distance:8 -Mprefetch=t0  
 -Msmartalloc=huge -Msmartalloc=hugebss -Mipa=fast  
 -Mipa=inline -tp shanghai-64 -Bstatic\_pgi

437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)  
 -Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse  
 -Mvect=fuse -Msmartalloc=huge -Mprefetch=distance:8  
 -Mprefetch=t0 -Mfprelaxed -tp shanghai-64 -Bstatic\_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2  
 -LNO:prefetch\_ahead=1 -CG:load\_exe=0 -HP

465.tonto: -march=barcelona -Ofast -OPT:alias=no\_f90\_pointer\_alias  
 -LNO:blocking=off -CG:load\_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp\_rate2006 = 147

Motherboard H8DA3-2, AMD Opteron 2439 SE

SPECfp\_rate\_base2006 = 133

CPU2006 license: 001176

Test date: Aug-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

## Peak Optimization Flags (Continued)

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m

436.cactusADM: -fastsse -Mconcur -Msmartalloc=huge -Mfprelaxed -Mipa=fast  
-Mipa=inline -tp shanghai-64 -Bstatic\_pgi

454.calculix: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse  
-Mvect=short -Msmartalloc=huge -Mprefetch=t0 -Mpre  
-Mfprelaxed -tp shanghai-64 -Bstatic\_pgi

481.wrf: -fastsse -Mvect=noaltcode -Msmartalloc=huge  
-Mprefetch=distance:8 -Mfprelaxed -tp shanghai-64  
-Bstatic\_pgi

## Peak Other Flags

C benchmarks:

-Mipa=jobs:4(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks:

410.bwaves: -Mipa=jobs:4

434.zeusmp: -Mipa=jobs:4

437.leslie3d: -Mipa=jobs:4(pass 2)

Benchmarks using both Fortran and C:

436.cactusADM: -Mipa=jobs:4

454.calculix: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd-platform.20090710.html>

[http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.20090914.html](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090914.html)

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd-platform.20090710.xml>

[http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.20090914.xml](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090914.xml)

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp\_rate2006 = 147

Motherboard H8DA3-2, AMD Opteron 2439 SE

SPECfp\_rate\_base2006 = 133

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Aug-2009

Hardware Availability: Jun-2009

Software Availability: Apr-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 02:43:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 15 September 2009.