



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint®_rate2006 = 33.5

Sun SPARC Enterprise M3000

SPECint_rate_base2006 = 31.2

CPU2006 license: 6


Test date: Nov-2009

Test sponsor: Sun Microsystems

Hardware Availability: Jan-2010

Tested by: Fujitsu

Software Availability: Oct-2009

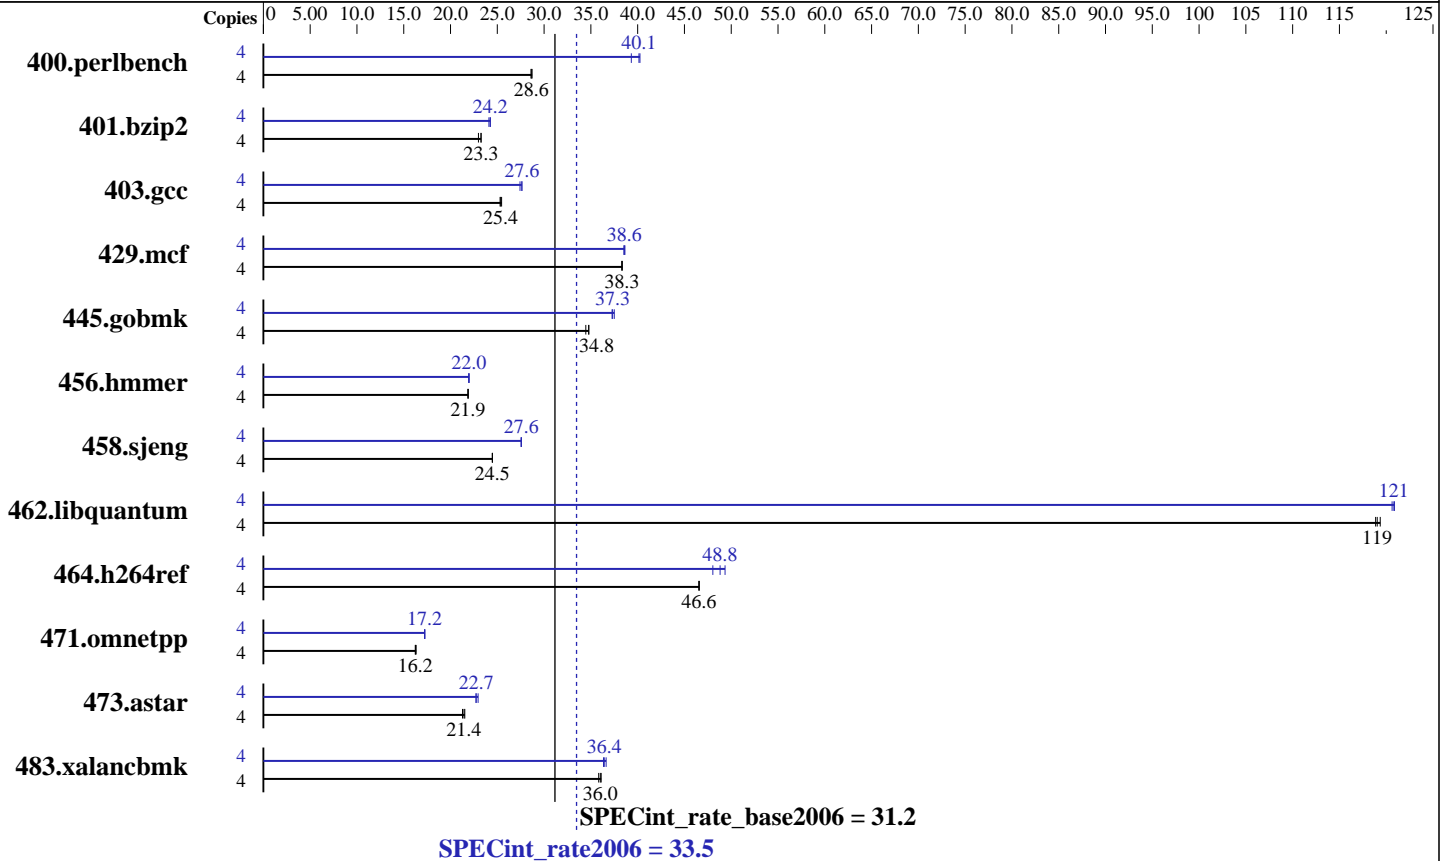

Hardware

CPU Name: SPARC64 VII
 CPU Characteristics: 2 cores
 CPU MHz: 2750
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 5 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8 x 2 GB), 2-way interleaved
 Disk Subsystem: 1 x Seagate Savvio 10K.2 (146 GB 10,000 RPM SAS)
 Other Hardware: None

Software

Operating System: Solaris 10 10/09 with patch 119963-18
 Compiler: Sun Studio 12 Update 1
 Auto Parallel: No
 File System: ufs
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: None



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint_rate2006 = 33.5

Sun SPARC Enterprise M3000

SPECint_rate_base2006 = 31.2

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Fujitsu

Test date: Nov-2009

Hardware Availability: Jan-2010

Software Availability: Oct-2009

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	1361	28.7	<u>1365</u>	<u>28.6</u>	1366	28.6	4	994	39.3	971	40.2	<u>974</u>	<u>40.1</u>
401.bzip2	4	1659	23.3	<u>1659</u>	<u>23.3</u>	1679	23.0	4	1591	24.3	1601	24.1	<u>1592</u>	<u>24.2</u>
403.gcc	4	<u>1270</u>	<u>25.4</u>	1273	25.3	1265	25.5	4	1174	27.4	1165	27.6	<u>1166</u>	<u>27.6</u>
429.mcf	4	<u>952</u>	<u>38.3</u>	952	38.3	951	38.4	4	947	38.5	<u>946</u>	<u>38.6</u>	944	38.6
445.gobmk	4	<u>1207</u>	<u>34.8</u>	1206	34.8	1218	34.5	4	<u>1124</u>	<u>37.3</u>	1119	37.5	1126	37.3
456.hammer	4	1706	21.9	1706	21.9	<u>1706</u>	<u>21.9</u>	4	1698	22.0	<u>1698</u>	<u>22.0</u>	1701	21.9
458.sjeng	4	1978	24.5	<u>1977</u>	<u>24.5</u>	1977	24.5	4	<u>1756</u>	<u>27.6</u>	1756	27.6	1756	27.6
462.libquantum	4	<u>696</u>	<u>119</u>	697	119	694	119	4	<u>686</u>	<u>121</u>	686	121	687	121
464.h264ref	4	<u>1901</u>	<u>46.6</u>	1901	46.6	1901	46.6	4	<u>1814</u>	<u>48.8</u>	1794	49.3	1843	48.0
471.omnetpp	4	1531	16.3	<u>1539</u>	<u>16.2</u>	1539	16.2	4	<u>1450</u>	<u>17.2</u>	1449	17.2	1450	17.2
473.astar	4	<u>1310</u>	<u>21.4</u>	1320	21.3	1304	21.5	4	<u>1235</u>	<u>22.7</u>	1224	22.9	1236	22.7
483.xalancbmk	4	<u>766</u>	<u>36.0</u>	770	35.8	765	36.1	4	<u>758</u>	<u>36.4</u>	753	36.6	759	36.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

Sun Studio compiler patches are available at http://developers.sun.com/sunstudio/downloads/patches/ss12u1_patches.jsp

Submit Notes

The config file option 'submit' was used. Processes were assigned to specific processors using 'pbind' commands. The list of processors to use was provided in the 'BIND' variable, to generate the pbind commands. (For details, please see the config file.)

Operating System Notes

Shell Environments:

`ulimit -s 131072` was used to limit the space consumed by the stack.(making more space available for the heap)

System Tunables:

(/etc/system parameters)

`tune_t_fsflushr=10`

Controls how many seconds elapse between runs of the page flush daemon, fsflush.

`autoup=600`

Causes pages older than the listed number of seconds to be written by fsflush.

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint_rate2006 = 33.5

Sun SPARC Enterprise M3000

SPECint_rate_base2006 = 31.2

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Fujitsu

Test date: Nov-2009

Hardware Availability: Jan-2010

Software Availability: Oct-2009

Operating System Notes (Continued)

bufhwm=3000

Memory byte limit for caching I/O buffers.

segmap_percent=1

Set maximum percent memory for file system cache.

Other System Settings:

The webconsole service was turned off using svcadm disable webconsole.

Platform Notes

Memory is 2-way interleaved by filling all slots with the same capacity DIMMs.

This result is measured on a Fujitsu SPARC Enterprise M3000 Server. Note that the Fujitsu SPARC Enterprise M3000 and Sun SPARC Enterprise M3000 are electrically equivalent.

Base Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

Base Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC

403.gcc: -DSPEC_CPU_SOLARIS

462.libquantum: -DSPEC_CPU_SOLARIS

483.xalancbmk: -DSPEC_CPU_SOLARIS

Base Optimization Flags

C benchmarks:

-fast -fma=fused -xipo=2 -xpagesize=4M -xarch=sparcfmaf

-xalias_level=std -M /usr/lib/ld/map.bssalign -l12amm

C++ benchmarks:

-library=stlport4 -fast -fma=fused -xipo=2 -xpagesize=4M

-xarch=sparcfmaf -xdepend -xalias_level=compatible

-M /usr/lib/ld/map.bssalign -lfast



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint_rate2006 = 33.5

Sun SPARC Enterprise M3000

SPECint_rate_base2006 = 31.2

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Fujitsu

Test date: Nov-2009

Hardware Availability: Jan-2010

Software Availability: Oct-2009

Base Other Flags

C benchmarks:

-xjobs=2 -V -#

C++ benchmarks:

-xjobs=2 -verbose=diags,version

Peak Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC

403.gcc: -DSPEC_CPU_SOLARIS

462.libquantum: -DSPEC_CPU_SOLARIS

483.xalancbmk: -DSPEC_CPU_SOLARIS

Peak Optimization Flags

C benchmarks:

400.perlbench: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-M /usr/lib/ld/map.bssalign -fma=fused -xipo=1
-xalias_level=std -xrestrict -xprefetch=no%auto -Xc
-lfast

401.bzip2: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-fma=fused -xalias_level=strong -xunroll=2

403.gcc: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xipo=2 -xalias_level=std -xprefetch=no -xunroll=2
-l12amm

429.mcf: -fast -xpagesize=4M -fma=fused -xipo=2 -xalias_level=std
-xunroll=4 -l12amm

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint_rate2006 = 33.5

Sun SPARC Enterprise M3000

SPECint_rate_base2006 = 31.2

CPU2006 license: 6

Test date: Nov-2009

Test sponsor: Sun Microsystems

Hardware Availability: Jan-2010

Tested by: Fujitsu

Software Availability: Oct-2009

Peak Optimization Flags (Continued)

445.gobmk: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-fma=fused -xalias_level=std -xrestrict -xunroll=3

456.hmmer: -fast -xpagesize=4M -fma=fused -xipo=1 -xalias_level=std
-l12amm

458.sjeng: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-fma=fused -xipo=2 -xprefetch=latx:0.5 -xunroll=2 -l12amm

462.libquantum: -fast -xpagesize=4M -fma=fused -xipo=2 -xprefetch=no
-xalias_level=std -xunroll=5 -lbsdmalloc

464.h264ref: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-M /usr/lib/ld/map.bssalign -fma=fused -xipo=1 -xO4
-xalias_level=std -xprefetch=no -xunroll=5 -l12amm

C++ benchmarks:

471.omnetpp: -library=stlport4 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xalias_level=compatible -fma=fused -xipo=2
-xprefetch_level=2 -Qoption cg -Qlp-av=0 -xunroll=3 -lfast

473.astar: -library=stlport4 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xalias_level=compatible -M /usr/lib/ld/map.bssalign
-fma=fused -xipo=2 -xprefetch=no%auto -xdepend -xunroll=2
-lfast -lbsdmalloc

483.xalancbmk: -library=stlport4 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xalias_level=compatible -fma=fused -xipo=2
-xprefetch_level=2 -xunroll=2 -lfast

Peak Other Flags

C benchmarks:
-xjobs=2 -V -#

C++ benchmarks:
-xjobs=2 -verbose=diags,version



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint_rate2006 = 33.5

Sun SPARC Enterprise M3000

SPECint_rate_base2006 = 31.2

CPU2006 license: 6

Test date: Nov-2009

Test sponsor: Sun Microsystems

Hardware Availability: Jan-2010

Tested by: Fujitsu

Software Availability: Oct-2009

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-12u1-and-gccfss4.2.r4.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-12u1-and-gccfss4.2.r4.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 06:09:31 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 January 2010.