



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECfp®\_rate2006 = 865

IBM Power 750 Express (3.55 GHz, 32 core, SLES)

SPECfp\_rate\_base2006 = 761

CPU2006 license: 11


Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Feb-2010

Tested by: IBM Corporation

Software Availability: Dec-2009

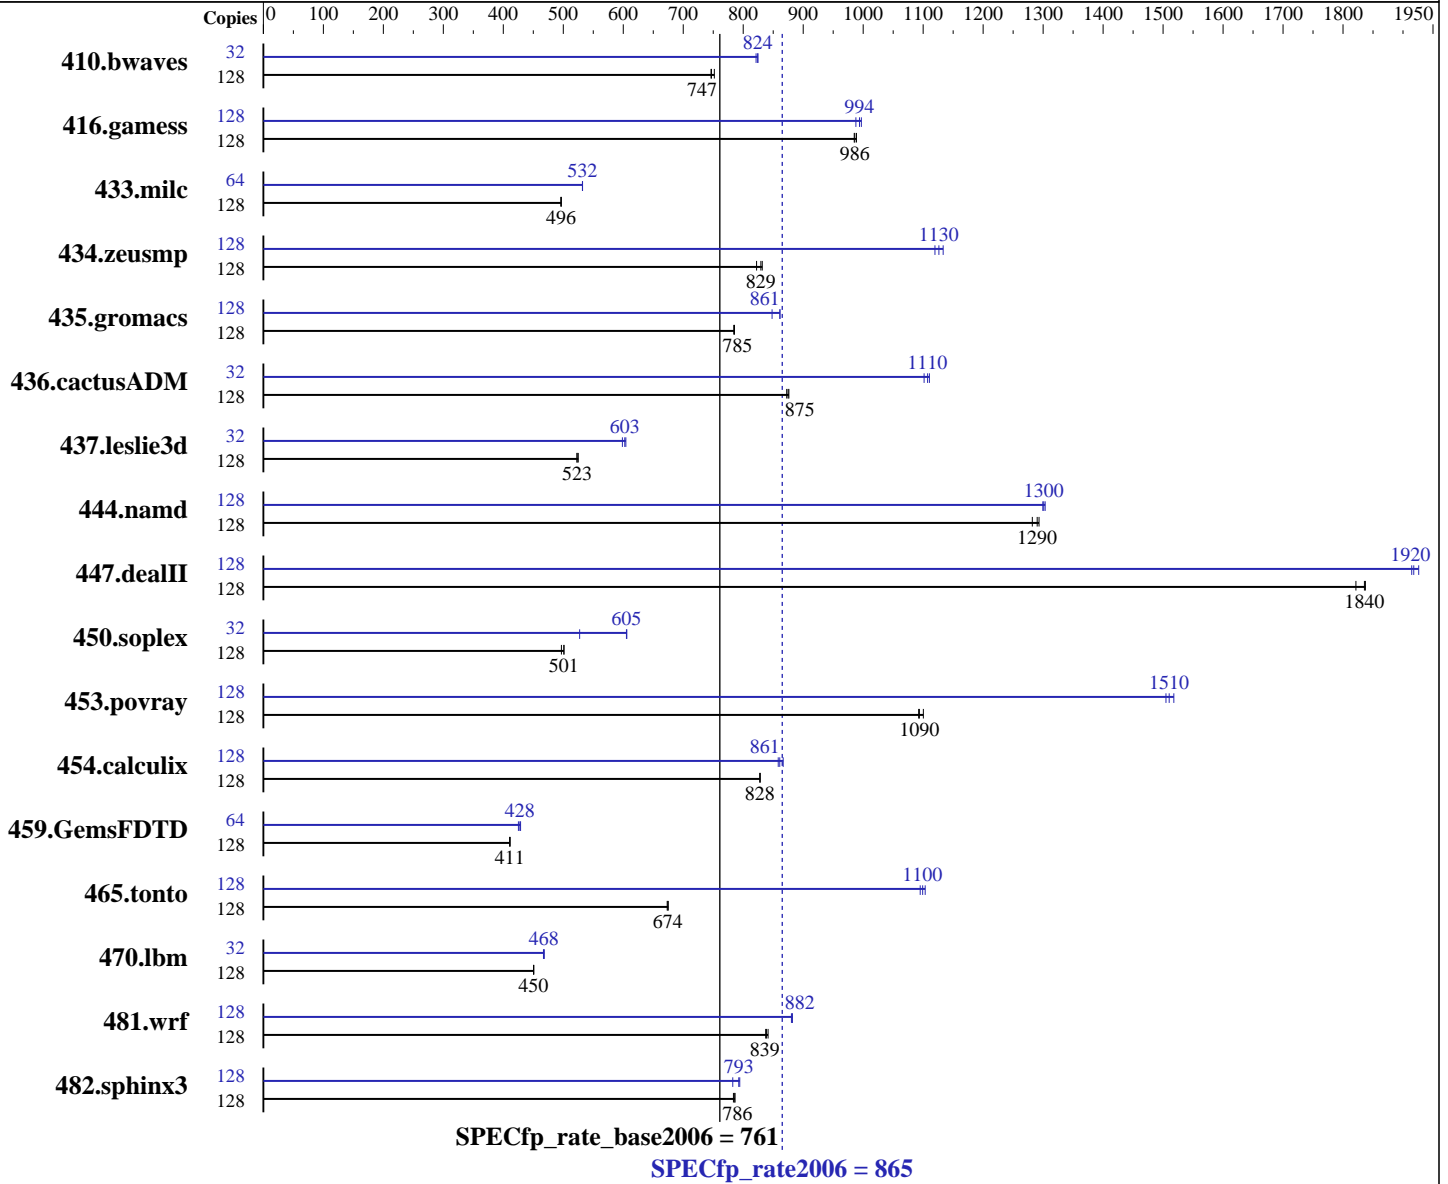

### Hardware

CPU Name: POWER7  
 CPU Characteristics: Intelligent Energy Optimization enabled, up to 3.86 GHz  
 CPU MHz: 3550  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 4 threads/core  
 CPU(s) orderable: 8,16,24,32 cores  
 Primary Cache: 32 KB I + 32 KB D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (ppc64), Kernel 2.6.27.19-5-ppc64  
 Compiler: IBM XL C/C++ for Linux, V10.1 Updated with the Oct2009 PTF  
 IBM XL Fortran for Linux, V12.1 Updated with the Oct2009 PTF  
 Auto Parallel: No  
 File System: ext3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECfp\_rate2006 = **865**

IBM Power 750 Express (3.55 GHz, 32 core, SLES)

SPECfp\_rate\_base2006 = **761**

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Feb-2010

Tested by: IBM Corporation

Software Availability: Dec-2009

Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 4 MB I+D on chip per core  
 Other Cache: None  
 Memory: 256 GB (32x8 GB) DDR3 1066 MHz  
 Disk Subsystem: 8x146.8 GB SAS SFF 15K RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: -Post-Link Optimization for Linux on POWER, Version 5.5.0-1  
 -MicroQuill SmartHeap 9

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	128	<b>2328</b>	<b>747</b>	2314	752	2331	746	32	527	825	529	821	<b>528</b>	<b>824</b>		
416.gamess	128	2535	989	2544	985	<b>2542</b>	<b>986</b>	128	2514	997	2537	988	<b>2522</b>	<b>994</b>		
433.milc	128	2369	496	<b>2367</b>	<b>496</b>	2366	497	64	1104	532	1104	532	<b>1104</b>	<b>532</b>		
434.zeusmp	128	<b>1404</b>	<b>829</b>	1400	832	1417	822	128	<b>1034</b>	<b>1130</b>	1028	1130	1040	1120		
435.gromacs	128	1165	785	<b>1165</b>	<b>785</b>	1164	785	128	<b>1061</b>	<b>861</b>	1078	848	1061	861		
436.cactusADM	128	1753	872	1746	876	<b>1749</b>	<b>875</b>	32	347	1100	<b>345</b>	<b>1110</b>	344	1110		
437.leslie3d	128	2292	525	2301	523	<b>2301</b>	<b>523</b>	32	498	604	503	599	<b>499</b>	<b>603</b>		
444.namd	128	801	1280	<b>796</b>	<b>1290</b>	794	1290	128	790	1300	788	1300	<b>789</b>	<b>1300</b>		
447.dealII	128	797	1840	<b>798</b>	<b>1840</b>	804	1820	128	760	1930	765	1910	<b>764</b>	<b>1920</b>		
450.soplex	128	2148	497	2130	501	<b>2131</b>	<b>501</b>	32	506	527	<b>441</b>	<b>605</b>	440	606		
453.povray	128	623	1090	619	1100	<b>623</b>	<b>1090</b>	128	453	1500	449	1520	<b>451</b>	<b>1510</b>		
454.calculix	128	<b>1275</b>	<b>828</b>	1276	828	1275	828	128	<b>1227</b>	<b>861</b>	1219	867	1230	858		
459.GemsFDTD	128	3307	411	3303	411	<b>3304</b>	<b>411</b>	64	<b>1588</b>	<b>428</b>	1597	425	1584	429		
465.tonto	128	<b>1868</b>	<b>674</b>	1866	675	1871	673	128	1150	1100	1141	1100	<b>1146</b>	<b>1100</b>		
470.lbm	128	3901	451	3904	450	<b>3904</b>	<b>450</b>	32	942	467	939	468	<b>940</b>	<b>468</b>		
481.wrf	128	1699	841	1707	837	<b>1705</b>	<b>839</b>	128	<b>1621</b>	<b>882</b>	1624	880	1621	882		
482.sphinx3	128	3183	784	3173	786	<b>3174</b>	<b>786</b>	128	3188	783	<b>3148</b>	<b>793</b>	3141	794		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

```
ulimit -s (stack) set to 1048576.
Large pages reserved as follows by root user:
echo 8448 > /proc/sys/vm/nr_hugepages
System configured with libhugetlbfs library for application access to large pages
Environment variables set before executing benchmarks.
export HUGETLB_VERBOSE=0
export HUGETLB_MORECORE=yes
export XLFRTLOPTS=intrinths=1
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 865

IBM Power 750 Express (3.55 GHz, 32 core, SLES)

SPECfp\_rate\_base2006 = 761

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Feb-2010

Tested by: IBM Corporation

Software Availability: Dec-2009

## General Notes

IBM Post-Link optimization tool with  
 options "-O4 -omullX -see 0 -m power6" used for  
 433.milc 435.gromacs 436.cactusADM 482.sphinx3  
 options "-O4 -omullX -see 1" used for  
 436.cactusADM  
 options "-O4 -omullX -see 1 -ihf -1" used for  
 453.povray  
 options "-O4" used for  
 465.tonto  
 Whenever option "-omullX" was used during the optimization phase,  
 option "-imullX" was also used during the instrumentation phase.

Benchmarks bound to a processor using numactl on the submit command.  
 See flags file for details on settings.

## Base Compiler Invocation

C benchmarks:  
 xlc -qlanglvl=extc99

C++ benchmarks:  
 x1C

Fortran benchmarks:  
 xlf95

Benchmarks using both Fortran and C:  
 xlc -qlanglvl=extc99 xlf95

## Base Portability Flags

410.bwaves: -qfixed  
 416.gamess: -qfixed  
 434.zeusmp: -qfixed  
 435.gromacs: -qfixed -qextname  
 436.cactusADM: -qfixed -qextname  
 437.leslie3d: -qfixed  
 454.calculix: -qfixed -qextname  
 481.wrf: -DNOUNDERSCORE  
 482.sphinx3: -qchars=signed

## Base Optimization Flags

C benchmarks:  
 -O5 -qnoenablevmx -lhugetlbfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 865

IBM Power 750 Express (3.55 GHz, 32 core, SLES)

SPECfp\_rate\_base2006 = 761

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Feb-2010

Tested by: IBM Corporation

Software Availability: Dec-2009

## Base Optimization Flags (Continued)

C++ benchmarks:

-O5 -qrtti -qnoenablevmx -qstaticlink  
-Wl,--whole-archive /usr/lib/libhugetlbfs.a -Wl,--no-whole-archive

Fortran benchmarks:

-O5 -qsmallstack=dynlenonheap -qalias=nostd -qnoenablevmx  
-B/usr/share/libhugetlbfs/ -t1 -Wl,--hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

-O5 -qnoenablevmx -qsmallstack=dynlenonheap -qalias=nostd  
-B/usr/share/libhugetlbfs/ -t1 -Wl,--hugetlbfs-link=BDT

## Base Other Flags

C benchmarks:

-qipa=noobject -qipa=threads

C++ benchmarks:

-qipa=noobject -qipa=threads

Fortran benchmarks:

-qipa=noobject -qipa=threads

Benchmarks using both Fortran and C:

-qipa=noobject -qipa=threads

## Peak Compiler Invocation

C benchmarks:

xlc -qlanglvl=extc99

C++ benchmarks:

x1C

Fortran benchmarks:

x1f95

Benchmarks using both Fortran and C:

xlc -qlanglvl=extc99 x1f95

## Peak Portability Flags

410.bwaves: -qfixed

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 865

IBM Power 750 Express (3.55 GHz, 32 core, SLES)

SPECfp\_rate\_base2006 = 761

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Feb-2010

Tested by: IBM Corporation

Software Availability: Dec-2009

## Peak Portability Flags (Continued)

416.gamess: -qfixed  
 434.zeusmp: -qfixed  
 435.gromacs: -qfixed -qextname  
 436.cactusADM: -qfixed -qextname  
 437.leslie3d: -qfixed  
 454.calculix: -qfixed -qextname  
 481.wrf: -DNOUNDERSCORE  
 482.sphinx3: -qchars=signed

## Peak Optimization Flags

C benchmarks:

433.milc: -Wl,-q -O5 -qnoenablevmx -lhugetlbfs

470.lbm: -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=auto -qtune=auto  
-B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT  
-q64

482.sphinx3: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -lhugetlbfs

C++ benchmarks:

444.namd: -qpdf1(pass 1) -qpdf2(pass 2) -O5

447.dealIII: -O5 -qrtti -qnoenablevmx -qstaticlink -Wl,-z,muldefs  
-Wl,--whole-archive /usr/lib/libsmartheap.a  
-Wl,--no-whole-archive

450.soplex: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qstrict -lhugetlbfs

453.povray: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -lsmartheap

Fortran benchmarks:

410.bwaves: -O5 -qsmallstack=dynlenonheap -lhugetlbfs

416.gamess: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qalias=nostd  
-qnoenablevmx

434.zeusmp: -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=auto -qtune=auto  
-qxlf90=nosignedzero -B/usr/share/libhugetlbfs/ -tl  
-Wl,--hugetlbfs-link=BDT

437.leslie3d: -O5 -qsmallstack=dynlenonheap -qnoenablevmx  
-B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 865

IBM Power 750 Express (3.55 GHz, 32 core, SLES)

SPECfp\_rate\_base2006 = 761

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Feb-2010

Tested by: IBM Corporation

Software Availability: Dec-2009

## Peak Optimization Flags (Continued)

459.GemsFDTD: -O5 -B/usr/share/libhugetlbfs/ -t1 -Wl,--hugetlbfs-link=BDT -q64

465.tonto: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -q64 -lsmartheap64

Benchmarks using both Fortran and C:

435.gromacs: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -lhugetlbfs

436.cactusADM: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O2 -qarch=auto -qtune=auto -qnostrict -lhugetlbfs

454.calculix: -O4 -B/usr/share/libhugetlbfs/ -t1 -Wl,--hugetlbfs-link=BDT

481.wrf: -O5 -qnoenablevmx -q64 -lhugetlbfs

## Peak Other Flags

C benchmarks:

-qipa=noobject -qipa=threads

C++ benchmarks:

-qipa=noobject -qipa=threads

Fortran benchmarks:

-qipa=noobject -qipa=threads

Benchmarks using both Fortran and C:

-qipa=noobject -qipa=threads

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20100302.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20100302.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 865

IBM Power 750 Express (3.55 GHz, 32 core, SLES)

SPECfp\_rate\_base2006 = 761

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jan-2010

Hardware Availability: Feb-2010

Software Availability: Dec-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 06:48:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 March 2010.