



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®_rate2006 = 1030

IBM Power 755 (3.3 GHz, 32 core, SLES)

SPECint_rate_base2006 = 924

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jan-2010

Hardware Availability: Feb-2010

Software Availability: Dec-2009

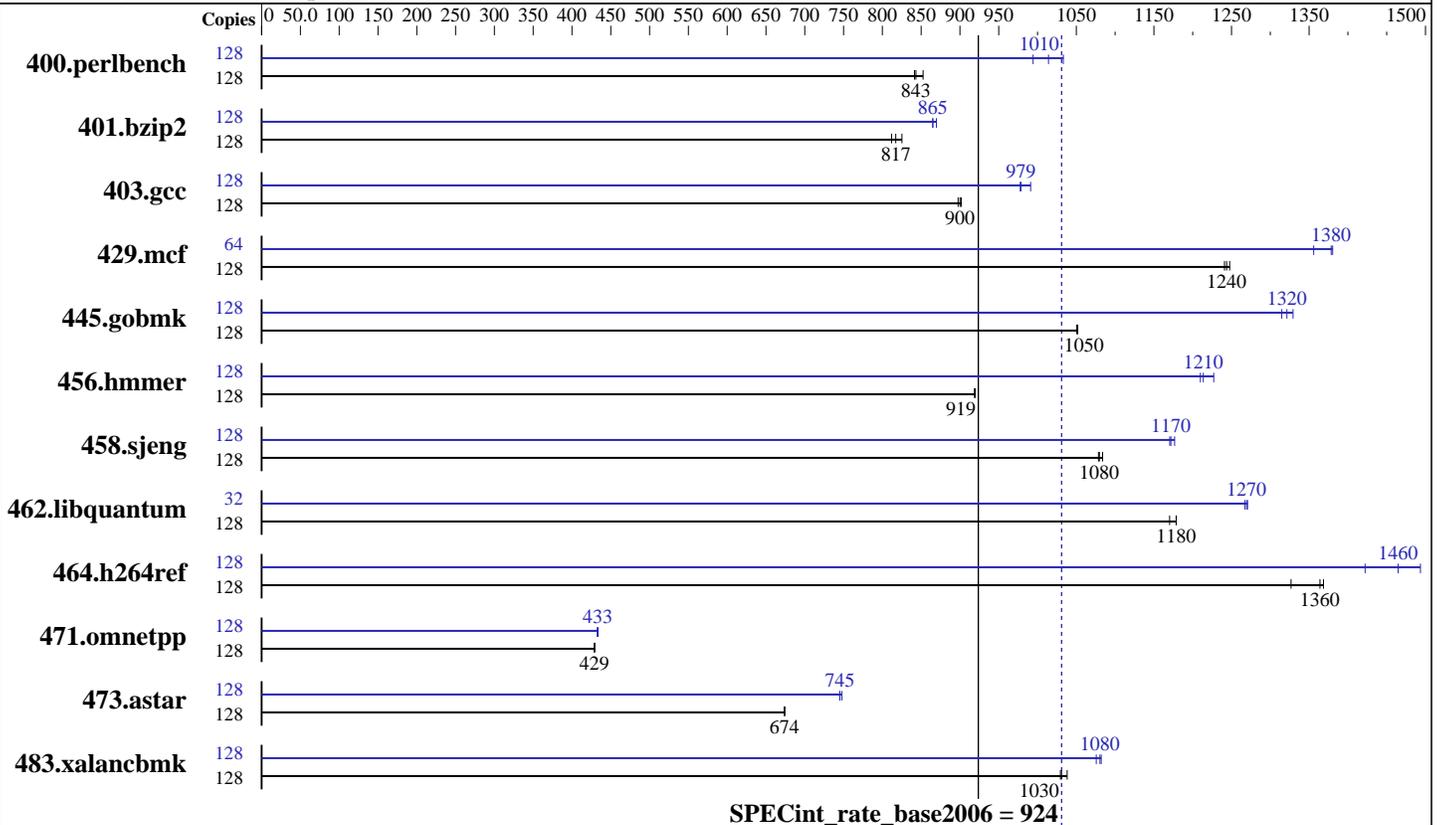

SPECint_rate_base2006 = 924

SPECint_rate2006 = 1030

Hardware

CPU Name: POWER7
 CPU Characteristics: Intelligent Energy Optimization enabled, up to 3.64 GHz
 CPU MHz: 3300
 FPU: Integrated
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 4 threads/core
 CPU(s) orderable: 32 cores
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 4 MB I+D on chip per core
 Other Cache: None
 Memory: 256 GB (32x8 GB) DDR3 1066 MHz
 Disk Subsystem: 8x146.8 GB SAS SFF 15K RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (ppc64), Kernel 2.6.27.19-5-ppc64
 Compiler: IBM XL C/C++ for Linux, V10.1 Updated with the Oct2009 PTF
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: -Post-Link Optimization for Linux on POWER, Version 5.5.0-1
 -MicroQuill SmartHeap 9



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 1030

IBM Power 755 (3.3 GHz, 32 core, SLES)

SPECint_rate_base2006 = 924

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Feb-2010

Tested by: IBM Corporation

Software Availability: Dec-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	128	1486	841	1483	843	1467	853	128	1258	994	1210	1030	1233	1010
401.bzip2	128	1497	825	1521	812	1511	817	128	1428	865	1428	865	1420	870
403.gcc	128	1148	898	1143	902	1145	900	128	1054	978	1040	991	1053	979
429.mcf	128	939	1240	936	1250	941	1240	64	430	1360	423	1380	423	1380
445.gobmk	128	1278	1050	1277	1050	1277	1050	128	1010	1330	1021	1310	1016	1320
456.hammer	128	1300	919	1299	920	1300	919	128	973	1230	984	1210	987	1210
458.sjeng	128	1436	1080	1429	1080	1434	1080	128	1322	1170	1323	1170	1316	1180
462.libquantum	128	2250	1180	2250	1180	2266	1170	32	522	1270	523	1270	522	1270
464.h264ref	128	2135	1330	2077	1360	2070	1370	128	1897	1490	1934	1460	1992	1420
471.omnetpp	128	1865	429	1865	429	1863	429	128	1849	433	1845	434	1847	433
473.astar	128	1333	674	1334	674	1333	674	128	1201	748	1206	745	1206	745
483.xalanbmk	128	857	1030	851	1040	858	1030	128	821	1080	817	1080	816	1080

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

```

ulimit -s (stack) set to 1048576.
Large pages reserved as follows by root user:
  echo 7040 > /proc/sys/vm/nr_hugepages
System configured with libhugetlbfs library for application access to large pages
Environment variables set before executing benchmarks.
  export HUGETLB_VERBOSE=0
  export HUGETLB_MORECORE=yes
  export XLFRTEOPTS=intrinths=1

```

General Notes

The "IBM Power 750 Express (3.3 GHz)" and "IBM Power 755 (3.3 GHz)" are electronically equivalent. The results have been measured on the "IBM Power 755 (3.3 GHz)"

```

IBM Post-Link Optimization tool with
options "-O4 -omullX -see 0 -m power6" used for
  400.perlbench 401.bzip2 403.gcc 456.hammer 458.sjeng
  483.xalanbmk
options "-bf -dp -hr -las -pca -RC -RD -rmte -si -tlo -A 64 -isf 104 -lu 8 -rt 0.16
  -hrf 0.18 -ihf 40 -sdp 6 -sdps 128 -shci 65 -si -sidf 45 -omullX" used for
  429.mcf
options "-q -O3 -A 32 -omullX" used for

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 1030

IBM Power 755 (3.3 GHz, 32 core, SLES)

SPECint_rate_base2006 = 924

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Feb-2010

Tested by: IBM Corporation

Software Availability: Dec-2009

General Notes (Continued)

445.gobmk
 options "-bf -dp -lro -nop -RC -RD -tb -tlo -vro -A 4
 -isf 88 -lu 8 -hrf 0.10 -sdp 4 -lun 27 -omullX" used for

462.libquantum
 options "-O4 -omullX -see 1" used for

473.astar
 options "-O4" used for

464.h264ref
 Whenever option "-omullX" was used during the optimization phase,
 option "-imullX" was also used during the instrumentation phase.

Benchmarks bound to a processor using numactl on the submit command.
 See flags file for details on settings.

Base Compiler Invocation

C benchmarks:
 xlc -qlanglvl=extc99

C++ benchmarks:
 xlc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_PPC
 462.libquantum: -DSPEC_CPU_LINUX
 464.h264ref: -qchars=signed
 483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
 -O5 -qalias=noansi -qalloca -lhugetlbfs

C++ benchmarks:
 -O5 -qrtti -lsmartheap

Base Other Flags

C benchmarks:
 -qipa=noobject -qipa=threads

C++ benchmarks:
 -qipa=noobject -qipa=threads



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 1030

IBM Power 755 (3.3 GHz, 32 core, SLES)

SPECint_rate_base2006 = 924

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Feb-2010

Tested by: IBM Corporation

Software Availability: Dec-2009

Peak Compiler Invocation

C benchmarks:

xlc -qlanglvl=extc99

C++ benchmarks:

xlC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_PPC
462.libquantum: -DSPEC_CPU_LINUX
464.h264ref: -qchars=signed
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qalias=noansi
-lsmartheap

401.bzip2: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=auto
-qtune=auto -lhugetlbfs

403.gcc: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qalloca
-lhugetlbfs

429.mcf: -Wl,-q -O5 -qnoenablevmx -lhugetlbfs

445.gobmk: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qnoenablevmx
-lhugetlbfs

456.hmmer: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -lhugetlbfs

458.sjeng: -Wl,-q -O5 -lhugetlbfs

462.libquantum: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qnoenablevmx
-q64 -lhugetlbfs

464.h264ref: Same as 456.hmmer

C++ benchmarks:

471.omnetpp: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qrtti -lsmartheap

473.atar: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qnoenablevmx
-lsmartheap

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 1030

IBM Power 755 (3.3 GHz, 32 core, SLES)

SPECint_rate_base2006 = 924

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Feb-2010

Tested by: IBM Corporation

Software Availability: Dec-2009

Peak Optimization Flags (Continued)

483.xalanbmk: -Wl,-q -O5 -lsmartheap

Peak Other Flags

C benchmarks:

-qipa=noobject -qipa=threads

C++ benchmarks:

-qipa=noobject -qipa=threads

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20100302.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20100302.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 06:46:35 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 March 2010.