



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint[®]_rate2006 = 1930

IBM Power 770 (3.5 GHz, 48 core)

SPECint_rate_base2006 = 1740

CPU2006 license: 11


Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Mar-2010

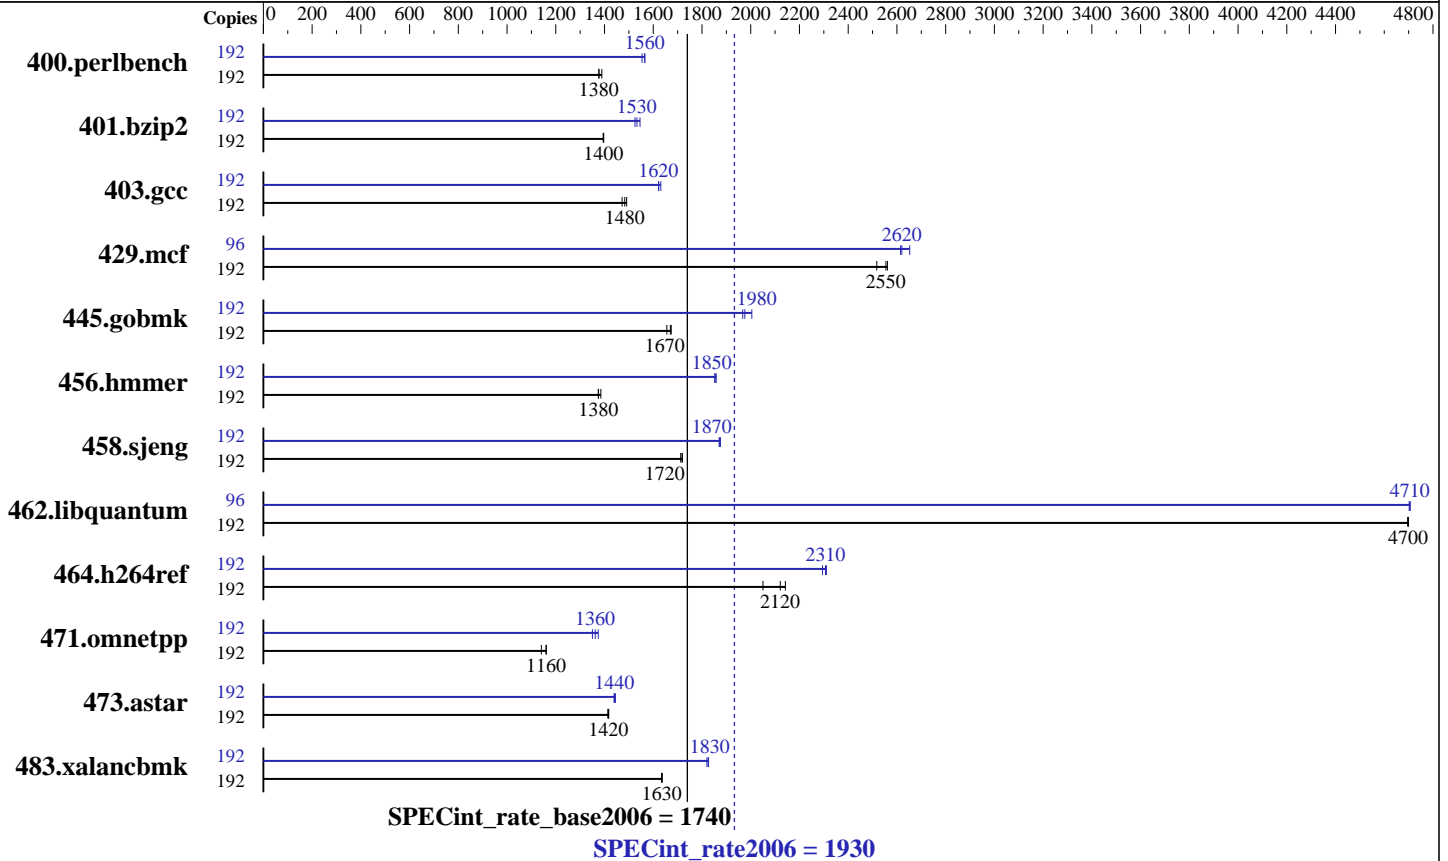

Hardware

CPU Name: POWER7
 CPU Characteristics: Intelligent Energy Optimization enabled, up to 3.75 GHz
 CPU MHz: 3500
 FPU: Integrated
 CPU(s) enabled: 48 cores, 8 chips, 6 cores/chip, 4 threads/core
 CPU(s) orderable: 12,16,24,32,36,48,64 cores
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 4 MB I+D on chip per core
 Other Cache: None
 Memory: 512 GB (64x8 GB) DDR3 1066 MHz
 Disk Subsystem: 12x146.8 GB SAS SFF 15K RPM
 Other Hardware: None

Software

Operating System: IBM AIX V6.1 with the 6100-04 Technology Level and Service Pack 3
 Compiler: XL C/C++ Enterprise Edition V10.1.0.5 for AIX
 Auto Parallel: No
 File System: AIX/JFS2
 System State: Multi-user
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: None



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 1930

IBM Power 770 (3.5 GHz, 48 core)

SPECint_rate_base2006 = 1740

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jan-2010
Hardware Availability: Mar-2010
Software Availability: Mar-2010

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	192	<u>1362</u>	<u>1380</u>	1350	1390	1363	1380	192	1198	1570	1207	1550	<u>1199</u>	<u>1560</u>
401.bzip2	192	1326	1400	1328	1390	<u>1328</u>	<u>1400</u>	192	<u>1209</u>	<u>1530</u>	1199	1550	1215	1520
403.gcc	192	1050	1470	1037	1490	<u>1042</u>	<u>1480</u>	192	953	1620	948	1630	<u>953</u>	<u>1620</u>
429.mcf	192	696	2520	684	2560	<u>685</u>	<u>2550</u>	96	330	2650	335	2610	<u>334</u>	<u>2620</u>
445.gobmk	192	<u>1206</u>	<u>1670</u>	1203	1670	1216	1660	192	1005	2000	1024	1970	<u>1019</u>	<u>1980</u>
456.hmmer	192	1303	1370	1293	1380	<u>1302</u>	<u>1380</u>	192	<u>966</u>	<u>1850</u>	967	1850	964	1860
458.sjeng	192	1357	1710	1351	1720	<u>1352</u>	<u>1720</u>	192	1239	1880	1242	1870	<u>1241</u>	<u>1870</u>
462.libquantum	192	<u>847</u>	<u>4700</u>	847	4700	847	4700	96	<u>423</u>	<u>4710</u>	423	4700	423	4710
464.h264ref	192	<u>2003</u>	<u>2120</u>	1983	2140	2072	2050	192	1852	2290	<u>1842</u>	<u>2310</u>	1839	2310
471.omnetpp	192	1034	1160	1052	1140	<u>1035</u>	<u>1160</u>	192	873	1370	889	1350	<u>881</u>	<u>1360</u>
473.astar	192	951	1420	954	1410	<u>951</u>	<u>1420</u>	192	937	1440	933	1440	<u>935</u>	<u>1440</u>
483.xalancbmk	192	810	1630	809	1640	<u>810</u>	<u>1630</u>	192	728	1820	725	1830	<u>726</u>	<u>1830</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Peak Tuning Notes

```

fdpr binary optimization tool used for 400.perlbench
with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 401.bzip2
with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 403.gcc
with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 429.mcf
with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 445.gobmk
with options -O3 -vrox -sdp 9
fdpr binary optimization tool used for 456.hmmer
with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 458.sjeng
with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 462.libquantum
with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 464.h264ref
with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 471.omnetpp
with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 473.astar
with options -O4 -vrox -pbsi

```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 1930

IBM Power 770 (3.5 GHz, 48 core)

SPECint_rate_base2006 = 1740

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jan-2010

Hardware Availability: Mar-2010

Software Availability: Mar-2010

Submit Notes

The config file option 'submit' was used to assign benchmark copy to specific kernel thread using the "bindprocessor" command (see flags file for details).

Operating System Notes

all ulimits set to unlimited.
19200 16M large pages defined with vmo command

General Notes

Environment variables set by runspec before the start of the run:

MALLOCOPTIONS = "pool"

MEMORY_AFFINITY = "MCM"

XLFRTEOPTS = "intrinthds=1"

See the flags file for details on settings.

Base Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

Base Portability Flags

400.perlbench: -DSPEC_CPU_AIX

462.libquantum: -DSPEC_CPU_AIX

464.h264ref: -DSPEC_CPU_AIX -qchars=signed

483.xalancbmk: -DSPEC_CPU_AIX

Base Optimization Flags

C benchmarks:

-bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qalias=noansi

-qalloca -blpdata

C++ benchmarks:

-bmaxdata:0x20000000 -O5 -qlargepage -D_ILS_MACROS -qrtti=all

-D__IBM_FAST_SET_MAP_ITERATOR -blpdata



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 1930

IBM Power 770 (3.5 GHz, 48 core)

SPECint_rate_base2006 = 1740

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jan-2010

Hardware Availability: Mar-2010

Software Availability: Mar-2010

Base Other Flags

C benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036

C++ benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036

Peak Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_AIX
462.libquantum: -DSPEC_CPU_AIX
464.h264ref: -DSPEC_CPU_AIX -qchars=signed
483.xalancbmk: -DSPEC_CPU_AIX

Peak Optimization Flags

C benchmarks:

400.perlbench: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-D_ILS_MACROS -qalias=noansi -qfdpr -blpdata
-btextpsize:64K

401.bzp2: -bmaxdata:0x4ffffffc -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -D_ILS_MACROS -qfdpr -blpdata

403.gcc: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O4
-qlargepage -D_ILS_MACROS -qalloca -qfdpr -blpdata

429.mcf: -bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qfdpr
-blpdata

445.gobmk: -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=auto -qtune=auto
-qlargepage -D_ILS_MACROS -qfdpr -blpdata

456.hmmer: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qenablevmx -qvecnv01
-D_ILS_MACROS -qfdpr -blpdata -btextpsize:64K

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 1930

IBM Power 770 (3.5 GHz, 48 core)

SPECint_rate_base2006 = 1740

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Mar-2010

Peak Optimization Flags (Continued)

458.sjeng: -O5 -qlargepage -qenablevmx -qvecnvml -D_ILS_MACROS
-qfdpr -blpdata

462.libquantum: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -q64
-D_ILS_MACROS -qfdpr -blpdata

464.h264ref: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -D_ILS_MACROS -qfdpr
-blpdata -btextpsize:64K

C++ benchmarks:

471.omnetpp: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -D_ILS_MACROS -qfdpr -qalign=natural
-qrtti=all -qinlglue -D__IBM_FAST_SET_MAP_ITERATOR
-blpdata -btextpsize:64K

473.astar: -bmaxdata:0x20000000 -O5 -qlargepage -D_ILS_MACROS -qfdpr
-qenablevmx -qvecnvml -qinlglue -qalign=natural -blpdata

483.xalancbmk: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -D_ILS_MACROS -qfdpr -qinlglue
-D__IBM_FAST_VECTOR -blpdata -btextpsize:64K

Peak Other Flags

C benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036

C++ benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-XL.20100303.html>

<http://www.spec.org/cpu2006/flags/IBM-AIX.20100303.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-XL.20100303.xml>

<http://www.spec.org/cpu2006/flags/IBM-AIX.20100303.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 1930

IBM Power 770 (3.5 GHz, 48 core)

SPECint_rate_base2006 = 1740

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jan-2010

Hardware Availability: Mar-2010

Software Availability: Mar-2010

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 06:06:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 March 2010.