



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®_rate2006 = 2240

IBM Power 780 (3.86 GHz, 64 core)

SPECfp_rate_base2006 = 2030

CPU2006 license: 11


Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Mar-2010

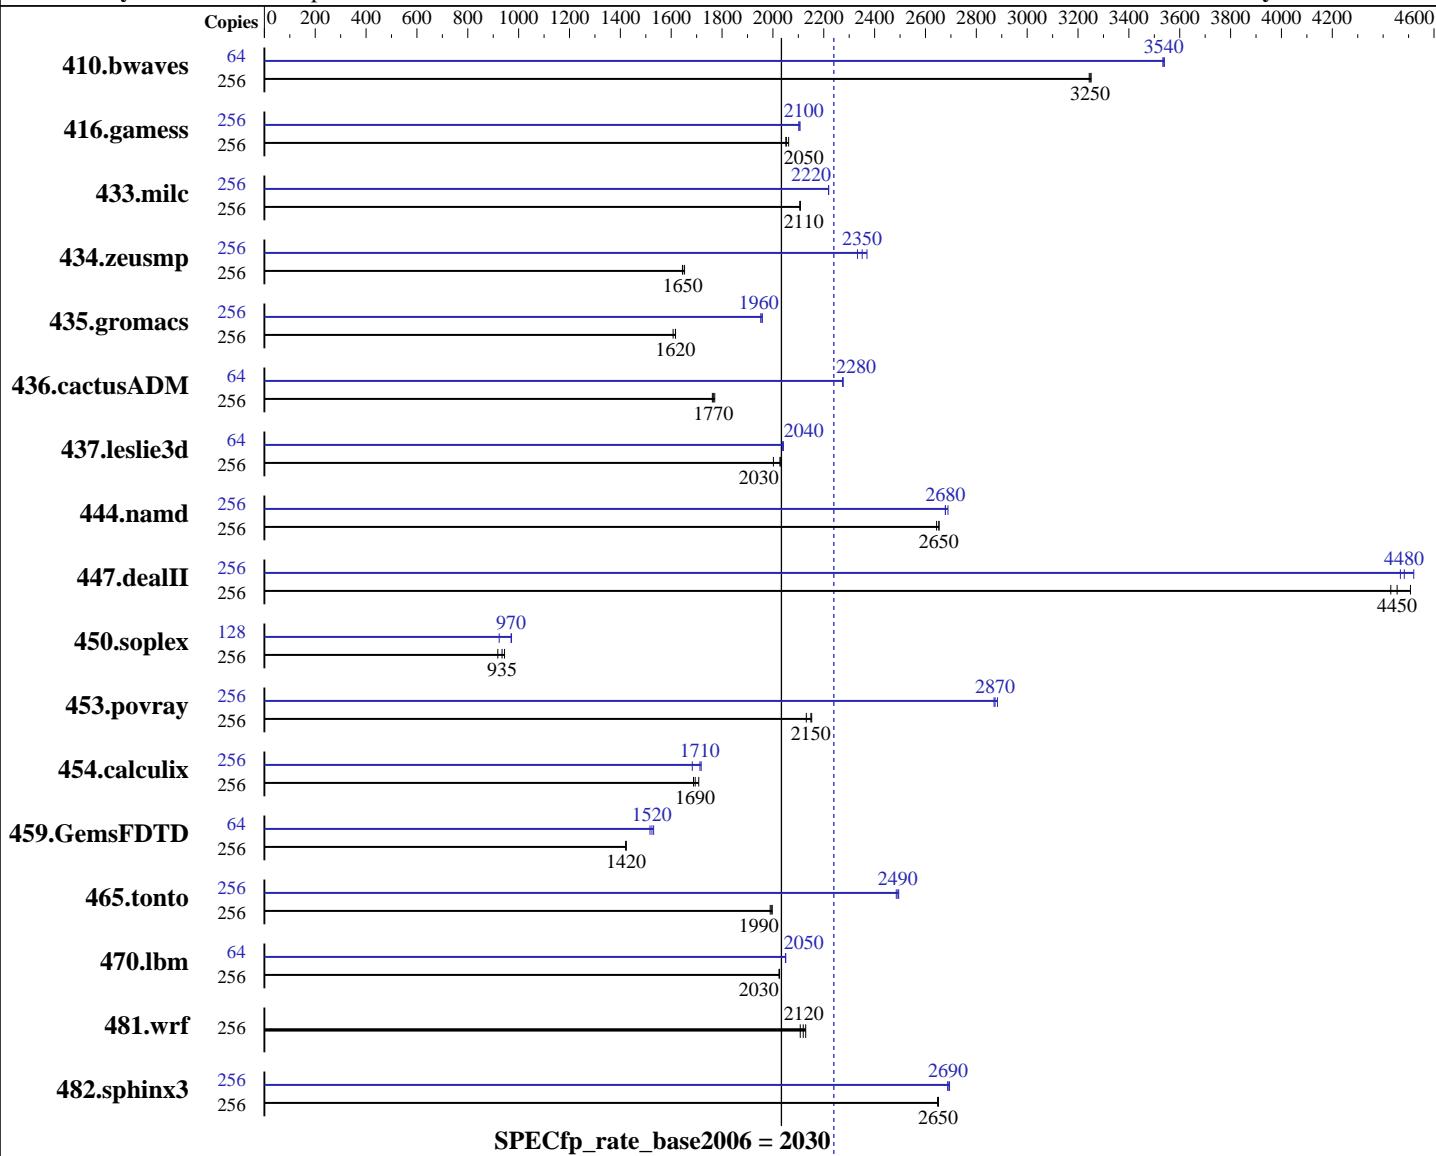

Hardware

CPU Name: POWER7
CPU Characteristics: Intelligent Energy Optimization enabled, up to 3.94 GHz
CPU MHz: 3860
FPU: Integrated
CPU(s) enabled: 64 cores, 8 chips, 8 cores/chip, 4 threads/core
CPU(s) orderable: 8,16,24,32,48,64 cores
Primary Cache: 32 KB I + 32 KB D on chip per core

Software

Operating System: IBM AIX V6.1 with the 6100-04 Technology Level and Service Pack 3
Compiler: XL C/C++ Enterprise Edition V10.1.0.5 for AIX
XL Fortran Enterprise Edition V12.1.0.6 for AIX
Auto Parallel: No
File System: AIX/JFS2
System State: Multi-user
Base Pointers: 32-bit
Peak Pointers: 32/64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 2240

IBM Power 780 (3.86 GHz, 64 core)

SPECfp_rate_base2006 = 2030

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Mar-2010

Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 4 MB I+D on chip per core
 Other Cache: None
 Memory: 512 GB (64x8 GB) DDR3 1066 MHz
 Disk Subsystem: 12x146.8 GB SAS SFF 15K RPM
 Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	256	1070	3250	<u>1071</u>	<u>3250</u>	1072	3240	64	246	3530	<u>246</u>	<u>3540</u>	246	3540
416.gamess	256	2442	2050	2431	2060	2444	2050	256	2379	2110	2383	2100	2385	2100
433.milc	256	1116	2110	1115	2110	<u>1115</u>	<u>2110</u>	256	1059	2220	<u>1059</u>	<u>2220</u>	1059	2220
434.zeusmp	256	<u>1416</u>	<u>1650</u>	1410	1650	1417	1640	256	999	2330	983	2370	<u>991</u>	<u>2350</u>
435.gromacs	256	<u>1131</u>	<u>1620</u>	1130	1620	1137	1610	256	936	1950	934	1960	<u>934</u>	<u>1960</u>
436.cactusADM	256	<u>1733</u>	<u>1770</u>	1727	1770	1736	1760	64	336	2270	336	2280	<u>336</u>	<u>2280</u>
437.leslie3d	256	1202	2000	<u>1186</u>	<u>2030</u>	1186	2030	64	295	2040	295	2040	<u>295</u>	<u>2040</u>
444.namd	256	774	2650	777	2640	774	2650	256	767	2680	764	2690	767	2680
447.dealII	256	661	4430	650	4510	<u>657</u>	<u>4450</u>	256	656	4470	648	4520	<u>653</u>	<u>4480</u>
450.soplex	256	2260	945	2325	918	<u>2284</u>	<u>935</u>	128	1098	972	<u>1100</u>	<u>970</u>	1156	924
453.povray	256	639	2130	<u>634</u>	<u>2150</u>	633	2150	256	472	2880	475	2870	<u>474</u>	<u>2870</u>
454.calculix	256	1251	1690	<u>1247</u>	<u>1690</u>	1236	1710	256	<u>1233</u>	<u>1710</u>	1229	1720	1255	1680
459.GemsFDTD	256	<u>1909</u>	<u>1420</u>	1909	1420	1911	1420	64	<u>445</u>	<u>1520</u>	448	1520	444	1530
465.tonto	256	1261	2000	1266	1990	<u>1264</u>	<u>1990</u>	256	1010	2490	1014	2490	<u>1011</u>	<u>2490</u>
470.lbm	256	1738	2020	<u>1736</u>	<u>2030</u>	1736	2030	64	429	2050	429	2050	<u>429</u>	<u>2050</u>
481.wrf	256	<u>1349</u>	<u>2120</u>	1343	2130	1357	2110	256	<u>1349</u>	<u>2120</u>	1343	2130	1357	2110
482.sphinx3	256	1882	2650	<u>1883</u>	<u>2650</u>	1884	2650	256	<u>1855</u>	<u>2690</u>	1857	2690	1852	2690

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Peak Tuning Notes

fdpr binary optimization tool used for 410.bwaves
 with options -O3 -vrox -pbsi -A 64
 fdpr binary optimization tool used for 433.milc
 with options -O4 -vrox -pbsi
 fdpr binary optimization tool used for 434.zeusmp
 with options -O3 -vrox -sdp 9
 fdpr binary optimization tool used for 435.gromacs
 with options -O4 -vrox -pbsi
 fdpr binary optimization tool used for 437.leslie3d
 with options -O4 -vrox -pbsi
 fdpr binary optimization tool used for 450.soplex
 with options -O3 -vrox -sdp 9
 fdpr binary optimization tool used for 453.povray

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 2240

IBM Power 780 (3.86 GHz, 64 core)

SPECfp_rate_base2006 = 2030

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Mar-2010

Peak Tuning Notes (Continued)

```
with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 454.calculix
with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 459.GemsFDTD
with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 470.lbm
with options -O3 -vrox -sdp 9
fdpr binary optimization tool used for 481.wrf
with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 482.sphinx3
with options -O4 -vrox -pbsi
```

Submit Notes

The config file option 'submit' was used
to assign benchmark copy to specific kernel thread using
the "bindprocessor" command (see flags file for details).

Operating System Notes

all ulimits set to unlimited.
25600 16M large pages defined with vmo command

General Notes

Environment variables set by runspec before the start of the run:
MALLOCOPTIONS = "pool"
MEMORY_AFFINITY = "MCM"
XLF RTEOPTS = "intrinthds=1"

See the flags file for details on settings.

Base Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlc

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 2240

IBM Power 780 (3.86 GHz, 64 core)

SPECfp_rate_base2006 = 2030

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Mar-2010

Base Portability Flags

```
410.bwaves: -qfixed  
416.gamess: -qfixed  
434.zeusmp: -qfixed  
435.gromacs: -qfixed -qextname  
436.cactusADM: -qfixed -qextname  
437.leslie3d: -qfixed  
454.calculix: -qfixed -qextname  
481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE  
482.sphinx3: -qchars=signed
```

Base Optimization Flags

C benchmarks:

```
-bmaxdata:0x40000000 -O5 -qlargepage -D_ILS_MACROS -blpdata
```

C++ benchmarks:

```
-bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qrtti=all  
-D__IBM_FAST_VECTOR -D__IBM_FAST_SET_MAP_ITERATOR -blpdata
```

Fortran benchmarks:

```
-bmaxdata:0x60000000 -O5 -qlargepage -qsmallstack=dynlenonheap  
-qalias=nostd -blpdata
```

Benchmarks using both Fortran and C:

```
-bmaxdata:0x60000000 -O5 -qlargepage -D_ILS_MACROS  
-qsmallstack=dynlenonheap -qalias=nostd -blpdata
```

Base Other Flags

C benchmarks:

```
-qipa=threads -qipa=noobject -qsuppress=1500-036
```

C++ benchmarks:

```
-qipa=threads -qipa=noobject -qsuppress=1500-036
```

Fortran benchmarks:

```
-qipa=threads -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg  
-qsuppress=1500-036
```

Benchmarks using both Fortran and C:

```
-qipa=threads -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg  
-qsuppress=1500-036
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 2240

IBM Power 780 (3.86 GHz, 64 core)

SPECfp_rate_base2006 = 2030

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Mar-2010

Peak Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlc

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95

Peak Portability Flags

410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE
482.sphinx3: -qchars=signed

Peak Optimization Flags

C benchmarks:

433.milc: -bmaxdata:0x40000000 -O5 -qlargepage -D_ILS_MACROS
-qalign=natural -qfdpr -blpdata

470.lbm: -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=auto -qtune=auto
-qlargepage -q64 -D_ILS_MACROS -qfdpr -blpdata

482.sphinx3: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qlargepage
-D_ILS_MACROS -qfdpr -blpdata

C++ benchmarks:

444.namd: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage
-D_ILS_MACROS -blpdata

447.dealII: -bmaxdata:0x50000000 -O5 -D_ILS_MACROS -qrtti=all
-D__IBM_FAST_VECTOR -D__IBM_FAST_SET_MAP_ITERATOR -blpdata
-btextpsize:64K

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 2240

IBM Power 780 (3.86 GHz, 64 core)

SPECfp_rate_base2006 = 2030

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Mar-2010

Peak Optimization Flags (Continued)

450.soplex: -O3 -qarch=auto -qtune=auto -qlargepage -q64
-D_ILS_MACROS -qfdpr -blpdata

453.povray: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -D_ILS_MACROS
-qalign=natural -qfdpr -btextpsize:64K

Fortran benchmarks:

410.bwaves: -bmaxdata:0x50000000 -O5 -qlargepage -qenablevmx -qvecnvol
-qfdpr -qsmallstack=dynlenonheap -blpdata

416.gamess: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -qalias=nostd -blpdata

434.zeusmp: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O3
-qarch=auto -qtune=auto -qlargepage -qenablevmx -qvecnvol
-qxl90=nosignedzero -qfdpr -blpdata

437.leslie3d: -O5 -qlargepage -qenablevmx -qvecnvol -qfdpr -blpdata

459.GemsFDTD: -O4 -qlargepage -q64 -qfdpr -blpdata

465.tonto: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-blpdata -btextpsize:64K

Benchmarks using both Fortran and C:

435.gromacs: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -D_ILS_MACROS -qfdpr

436.cactusADM: -bmaxdata:0x60000000 -qpdf1(pass 1) -qpdf2(pass 2) -O2
-qarch=auto -qtune=auto -qenablevmx -qvecnvol
-D_ILS_MACROS -qfdpr -qnostrict -blpdata -btextpsize:64K

454.calculix: -O4 -qlargepage -q64 -D_ILS_MACROS -qfdpr -blpdata

481.wrf: basepeak = yes

Peak Other Flags

C benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036

C++ benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036

Fortran benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 2240

IBM Power 780 (3.86 GHz, 64 core)

SPECfp_rate_base2006 = 2030

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Mar-2010

Peak Other Flags (Continued)

Benchmarks using both Fortran and C:

```
-qipa=threads -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg  
-qsuppress=1500-036
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-XL.20100303.html>
<http://www.spec.org/cpu2006/flags/IBM-AIX.20100303.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-XL.20100303.xml>
<http://www.spec.org/cpu2006/flags/IBM-AIX.20100303.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 06:05:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 March 2010.