



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®_rate2006 = 652

IBM Power 780 (3.86 GHz, 16 core)

SPECint_rate_base2006 = 586

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jan-2010

Hardware Availability: Mar-2010

Software Availability: Mar-2010

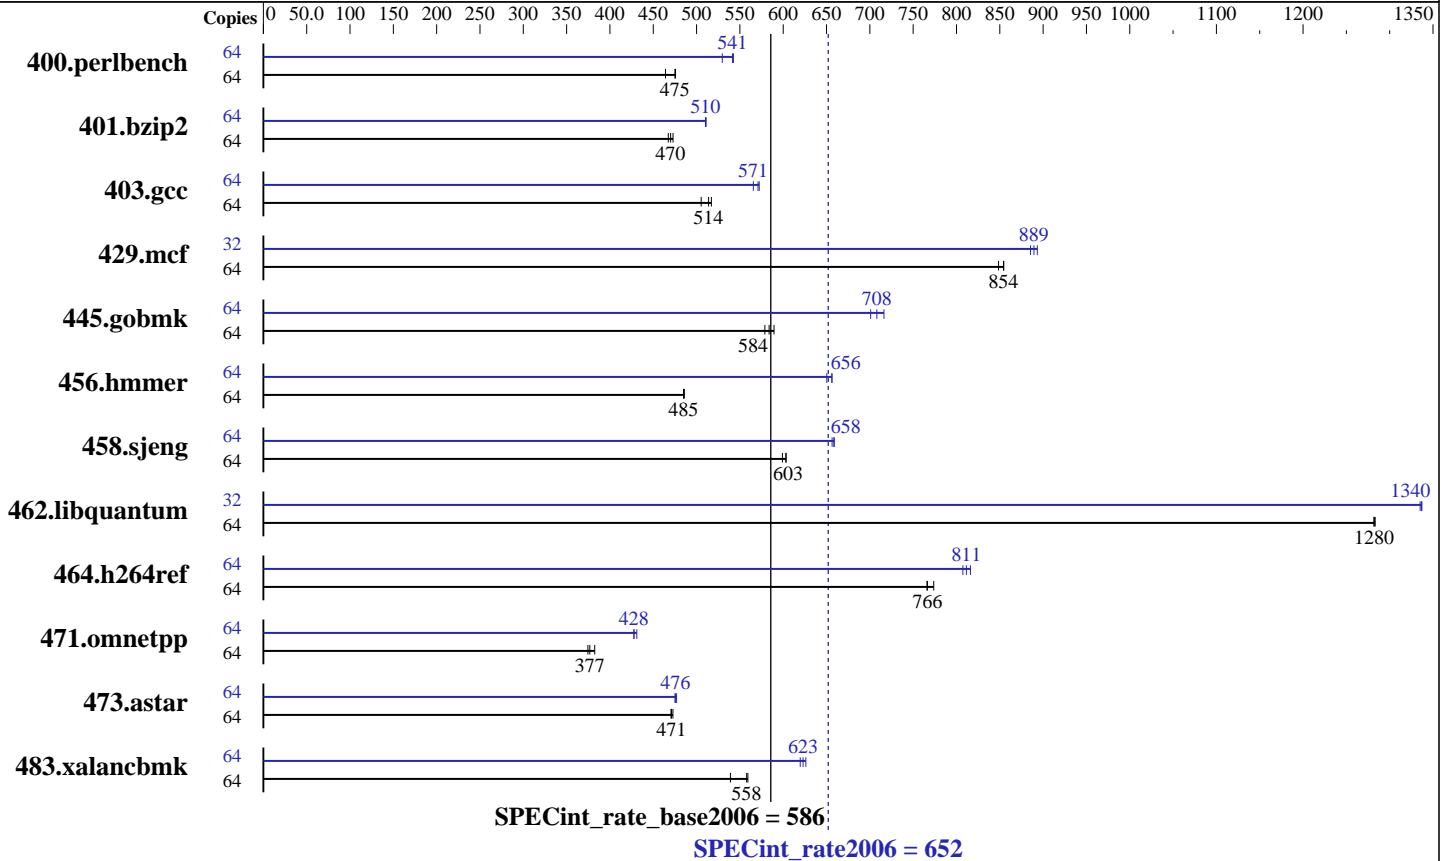

Hardware

CPU Name: POWER7
 CPU Characteristics: Intelligent Energy Optimization enabled, up to 3.94 GHz
 CPU MHz: 3860
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 4 threads/core
 CPU(s) orderable: 8,16,24,32,48,64 cores
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 4 MB I+D on chip per core
 Other Cache: None
 Memory: 128 GB (16x8 GB) DDR3 1066 MHz
 Disk Subsystem: 6x146.8 GB SAS SFF 15K RPM
 Other Hardware: None

Software

Operating System: IBM AIX V6.1 with the 6100-04 Technology Level and Service Pack 3
 Compiler: XL C/C++ Enterprise Edition V10.1.0.5 for AIX
 Auto Parallel: No
 File System: AIX/JFS2
 System State: Multi-user
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: None



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 652

IBM Power 780 (3.86 GHz, 16 core)

SPECint_rate_base2006 = 586

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Mar-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	1314	476	<u>1316</u>	<u>475</u>	1347	464	64	1180	530	<u>1155</u>	<u>541</u>	1153	543
401.bzip2	64	<u>1314</u>	<u>470</u>	1306	473	1322	467	64	1209	511	1210	510	<u>1210</u>	<u>510</u>
403.gcc	64	996	517	<u>1003</u>	<u>514</u>	1020	505	64	<u>902</u>	<u>571</u>	911	566	900	572
429.mcf	64	<u>683</u>	<u>854</u>	683	854	688	849	32	327	893	<u>328</u>	<u>889</u>	330	885
445.gobmk	64	1160	579	<u>1150</u>	<u>584</u>	1139	589	64	958	701	<u>948</u>	<u>708</u>	937	716
456.hmmer	64	<u>1231</u>	<u>485</u>	1231	485	1229	486	64	918	650	910	656	<u>910</u>	<u>656</u>
458.sjeng	64	1283	603	<u>1284</u>	<u>603</u>	1293	599	64	<u>1176</u>	<u>658</u>	1175	659	1180	656
462.libquantum	64	<u>1034</u>	<u>1280</u>	1035	1280	1033	1280	32	496	1340	497	1340	<u>496</u>	<u>1340</u>
464.h264ref	64	<u>1848</u>	<u>766</u>	1831	774	1849	766	64	1754	807	1735	816	<u>1745</u>	<u>811</u>
471.omnetpp	64	<u>1062</u>	<u>377</u>	1046	382	1068	375	64	<u>935</u>	<u>428</u>	935	428	928	431
473.astar	64	<u>954</u>	<u>471</u>	955	470	950	473	64	946	475	942	477	<u>945</u>	<u>476</u>
483.xalancbmk	64	<u>792</u>	<u>558</u>	790	559	819	539	64	705	626	713	620	<u>709</u>	<u>623</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Peak Tuning Notes

```

fdpr binary optimization tool used for 400.perlbench
  with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 401.bzip2
  with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 403.gcc
  with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 429.mcf
  with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 445.gobmk
  with options -O3 -vrox -sdp 9
fdpr binary optimization tool used for 456.hmmer
  with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 458.sjeng
  with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 462.libquantum
  with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 464.h264ref
  with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 471.omnetpp
  with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 473.astar
  with options -O4 -vrox -pbsi

```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 652

IBM Power 780 (3.86 GHz, 16 core)

SPECint_rate_base2006 = 586

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jan-2010

Hardware Availability: Mar-2010

Software Availability: Mar-2010

Submit Notes

The config file option 'submit' was used to assign benchmark copy to specific kernel thread using the "bindprocessor" command (see flags file for details).

Operating System Notes

all ulimits set to unlimited.
6400 16M large pages defined with vmo command

General Notes

Environment variables set by runspec before the start of the run:

MALLOCOPTIONS = "pool"

MEMORY_AFFINITY = "MCM"

XLFRTEOPTS = "intrinthds=1"

See the flags file for details on settings.

Base Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

Base Portability Flags

400.perlbench: -DSPEC_CPU_AIX
462.libquantum: -DSPEC_CPU_AIX
464.h264ref: -DSPEC_CPU_AIX -qchars=signed
483.xalancbmk: -DSPEC_CPU_AIX

Base Optimization Flags

C benchmarks:

-bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qalias=noansi
-qalloca -blpdata

C++ benchmarks:

-bmaxdata:0x20000000 -O5 -qlargepage -D_ILS_MACROS -qrtti=all
-D__IBM_FAST_SET_MAP_ITERATOR -blpdata



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 652

IBM Power 780 (3.86 GHz, 16 core)

SPECint_rate_base2006 = 586

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jan-2010

Hardware Availability: Mar-2010

Software Availability: Mar-2010

Base Other Flags

C benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036

C++ benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036

Peak Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_AIX
462.libquantum: -DSPEC_CPU_AIX
464.h264ref: -DSPEC_CPU_AIX -qchars=signed
483.xalancbmk: -DSPEC_CPU_AIX

Peak Optimization Flags

C benchmarks:

400.perlbench: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-D_ILS_MACROS -qalias=noansi -qfdpr -blpdata
-btextpsize:64K

401.bzp2: -bmaxdata:0x4ffffffc -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -D_ILS_MACROS -qfdpr -blpdata

403.gcc: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O4
-qlargepage -D_ILS_MACROS -qalloca -qfdpr -blpdata

429.mcf: -bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qfdpr
-blpdata

445.gobmk: -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=auto -qtune=auto
-qlargepage -D_ILS_MACROS -qfdpr -blpdata

456.hmmer: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qenablevmx -qvecnv01
-D_ILS_MACROS -qfdpr -blpdata -btextpsize:64K

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 652

IBM Power 780 (3.86 GHz, 16 core)

SPECint_rate_base2006 = 586

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Mar-2010

Peak Optimization Flags (Continued)

458.sjeng: -O5 -qlargepage -qenablevmx -qvecnvml -D_ILS_MACROS
-qfdpr -blpdata

462.libquantum: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -q64
-D_ILS_MACROS -qfdpr -blpdata

464.h264ref: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -D_ILS_MACROS -qfdpr
-blpdata -btextpsize:64K

C++ benchmarks:

471.omnetpp: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -D_ILS_MACROS -qfdpr -qalign=natural
-qrtti=all -qinlglue -D__IBM_FAST_SET_MAP_ITERATOR
-blpdata -btextpsize:64K

473.astar: -bmaxdata:0x20000000 -O5 -qlargepage -D_ILS_MACROS -qfdpr
-qenablevmx -qvecnvml -qinlglue -qalign=natural -blpdata

483.xalancbmk: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -D_ILS_MACROS -qfdpr -qinlglue
-D__IBM_FAST_VECTOR -blpdata -btextpsize:64K

Peak Other Flags

C benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036

C++ benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-XL.20100303.html>

<http://www.spec.org/cpu2006/flags/IBM-AIX.20100303.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-XL.20100303.xml>

<http://www.spec.org/cpu2006/flags/IBM-AIX.20100303.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 652

IBM Power 780 (3.86 GHz, 16 core)

SPECint_rate_base2006 = 586

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jan-2010

Hardware Availability: Mar-2010

Software Availability: Mar-2010

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 06:06:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 March 2010.