



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint<sup>®</sup>\_rate2006 = 134

HP Integrity BL860c i2 (1.73 GHz/24MB Quad-Core Intel Itanium 9350)

SPECint\_rate\_base2006 = 128

CPU2006 license: 03


Test date: Jan-2010

Test sponsor: Hewlett-Packard Company

Hardware Availability: May-2010

Tested by: Hewlett-Packard Company

Software Availability: Mar-2010

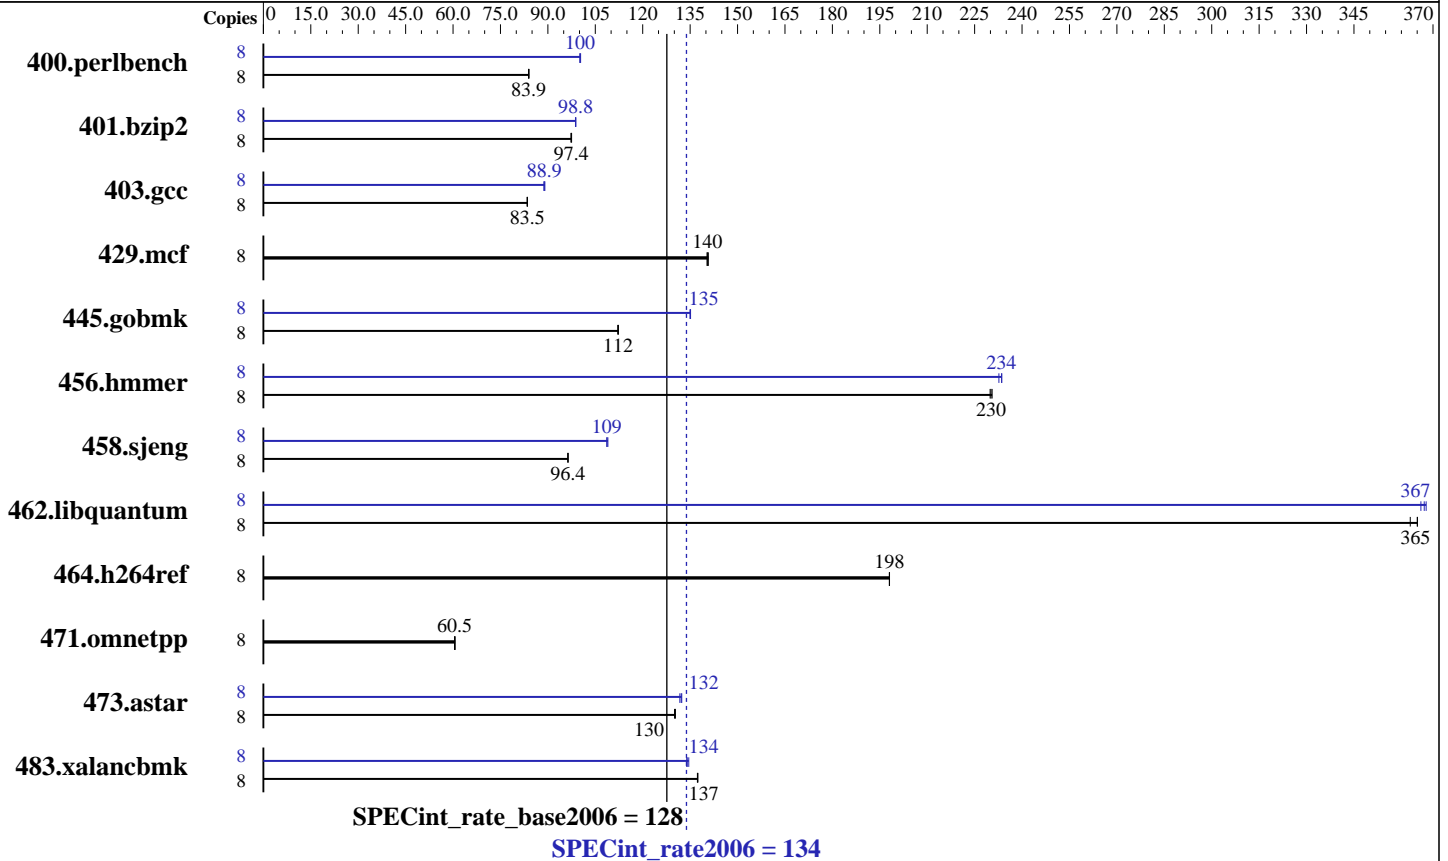

### Hardware

CPU Name: Intel Itanium 9350  
 CPU Characteristics: Intel Turbo Boost Technology up to 1.86 GHz  
 CPU MHz: 1730  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1-2 chips  
 Primary Cache: 16 KB I + 16 KB D on chip per core  
 Secondary Cache: 512 KB I + 256 KB D on chip per core  
 L3 Cache: 6 MB I+D on chip per core  
 Other Cache: None  
 Memory: 32 GB (16 x 2GB 2Rx8 PC3-10600R)  
 Disk Subsystem: 1 x 73 GB 15K RPM SAS  
 Other Hardware: None

### Software

Operating System: HP-UX 11i v3 Data Center Operating Environment B.11.31.1003  
 Compiler: HP C/aC++ Developer's Bundle C.11.31.05  
 Auto Parallel: No  
 File System: vxfs  
 System State: Multi-user  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other Software: MallocNextGen B.11.31.0903.02



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint\_rate2006 = 134

HP Integrity BL860c i2 (1.73 GHz/24MB Quad-Core Intel Itanium 9350)

SPECint\_rate\_base2006 = 128

CPU2006 license: 03

Test date: Jan-2010

Test sponsor: Hewlett-Packard Company

Hardware Availability: May-2010

Tested by: Hewlett-Packard Company

Software Availability: Mar-2010

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	932	83.9	930	84.1	<u>932</u>	<u>83.9</u>	8	<u>780</u>	<u>100</u>	779	100	781	100
401.bzip2	8	<u>793</u>	<u>97.4</u>	793	97.3	792	97.5	8	<u>782</u>	<u>98.8</u>	781	98.9	782	98.7
403.gcc	8	771	83.5	772	83.5	<u>771</u>	<u>83.5</u>	8	<u>725</u>	<u>88.9</u>	723	89.1	726	88.7
429.mcf	8	520	140	518	141	<u>519</u>	<u>140</u>	8	520	140	518	141	<u>519</u>	<u>140</u>
445.gobmk	8	<u>748</u>	<u>112</u>	747	112	749	112	8	622	135	621	135	<u>621</u>	<u>135</u>
456.hammer	8	324	231	<u>324</u>	<u>230</u>	325	230	8	321	233	320	234	<u>320</u>	<u>234</u>
458.sjeng	8	1004	96.4	1005	96.3	<u>1004</u>	<u>96.4</u>	8	<u>891</u>	<u>109</u>	891	109	888	109
462.libquantum	8	<u>454</u>	<u>365</u>	457	363	454	365	8	<u>451</u>	<u>367</u>	453	366	451	368
464.h264ref	8	894	198	<u>894</u>	<u>198</u>	894	198	8	894	198	<u>894</u>	<u>198</u>	894	198
471.omnetpp	8	827	60.5	<u>826</u>	<u>60.5</u>	824	60.7	8	827	60.5	<u>826</u>	<u>60.5</u>	824	60.7
473.astar	8	431	130	<u>431</u>	<u>130</u>	432	130	8	<u>425</u>	<u>132</u>	426	132	424	132
483.xalancbmk	8	<u>402</u>	<u>137</u>	402	137	402	137	8	412	134	<u>412</u>	<u>134</u>	410	135

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

The following kernel tunables were set, in addition to the defaults set by the Base Operating Environment:

```

filecache_max=25%
filecache_min=25%
maxdsiz=3221225472
fcache_fb_policy=1
base_pagesize=64
pagezero_daemon_enabled=0
vxfs_ifree_timelag=-1
maxssiz=0x17f00000
lcpu_attr=0

```

## Platform Notes

Use of Hardware Threading by the OS was disabled via kctune  
The following config file entry was used to bind processes to cores using the HP-UX "mpsched" utility:  
submit = let "MYCPU=\\$SPEC COP YNUM\*2" ;mpsched -c \\$MYCPU \$command



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 134**

HP Integrity BL860c i2 (1.73 GHz/24MB  
Quad-Core Intel Itanium 9350)

**SPECint\_rate\_base2006 = 128**

**CPU2006 license:** 03

**Test date:** Jan-2010

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** May-2010

**Tested by:** Hewlett-Packard Company

**Software Availability:** Mar-2010

## Base Compiler Invocation

C benchmarks:

`/opt/ansic/bin/cc -AC99`

C++ benchmarks:

`/opt/aCC/bin/aCC -Aa`

## Base Portability Flags

400.perlbench: `-DSPEC_CPU_HPUX_IA64`

403.gcc: `-DSPEC_CPU_HPUX`

462.libquantum: `-DSPEC_CPU_HPUX`

483.xalancbmk: `-DSPEC_CPU_HPUX_IA64`

## Base Optimization Flags

C benchmarks:

`+Ofaster +Otype_safety=ansi -Wl,-aarchive_shared -Wl,+pd,64M`

`-Wl,+pi,64K -Wl,-N`

C++ benchmarks:

`+Ofaster +Otype_safety=ansi -Wl,-aarchive_shared -Wl,+pd,64M`

`-Wl,+pi,64K -Wl,-N -lmallocng`

## Peak Compiler Invocation

C benchmarks:

`/opt/ansic/bin/cc -AC99`

C++ benchmarks:

`/opt/aCC/bin/aCC -Aa`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_HPUX_IA64`

403.gcc: `-DSPEC_CPU_HPUX`

462.libquantum: `-DSPEC_CPU_HPUX`

483.xalancbmk: `-DSPEC_CPU_HPUX_IA64`



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint\_rate2006 = 134

HP Integrity BL860c i2 (1.73 GHz/24MB  
Quad-Core Intel Itanium 9350)

SPECint\_rate\_base2006 = 128

CPU2006 license: 03

Test date: Jan-2010

Test sponsor: Hewlett-Packard Company

Hardware Availability: May-2010

Tested by: Hewlett-Packard Company

Software Availability: Mar-2010

## Peak Optimization Flags

C benchmarks:

400.perlbench: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)  
+Ofaster +Otype\_safety=ansi -Wl,-a,archive\_shared  
-Wl,+pd,64M -Wl,+pi,64M -Wl,-N

401.bzip2: Same as 400.perlbench

403.gcc: Same as 400.perlbench

429.mcf: basepeak = yes

445.gobmk: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)  
+Ofaster +Otype\_safety=ansi -Wl,-a,archive\_shared  
-Wl,+pd,64M -Wl,+pi,64M +Odataprefetch=direct -Wl,-N

456.hmmmer: Same as 400.perlbench

458.sjeng: Same as 445.gobmk

462.libquantum: Same as 400.perlbench

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: +Ofaster +Otype\_safety=ansi -Wl,-a,archive\_shared  
-Wl,+pd,64M -Wl,+pi,64M +Onoparmsoverlap -Wl,-N  
-lmallocng

483.xalancbmk: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)  
+Ofaster +Otype\_safety=ansi -Wl,-a,archive\_shared  
-Wl,+pd,64M -Wl,+pi,64M +Onoparmsoverlap -Wl,-N  
-lmallocng

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Itanium-HPUX-1003-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Itanium-HPUX-1003-flags.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

HP Integrity BL860c i2 (1.73 GHz/24MB  
Quad-Core Intel Itanium 9350)

**SPECint\_rate2006 = 134**

**SPECint\_rate\_base2006 = 128**

**CPU2006 license:** 03

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Jan-2010

**Hardware Availability:** May-2010

**Software Availability:** Mar-2010

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 06:46:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 March 2010.