



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint[®]2006 = **32.6**

CELSIUS W380, Intel Core i5-660

SPECint_base2006 = **29.7**

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jan-2010

Hardware Availability: Jan-2010

Software Availability: Oct-2009

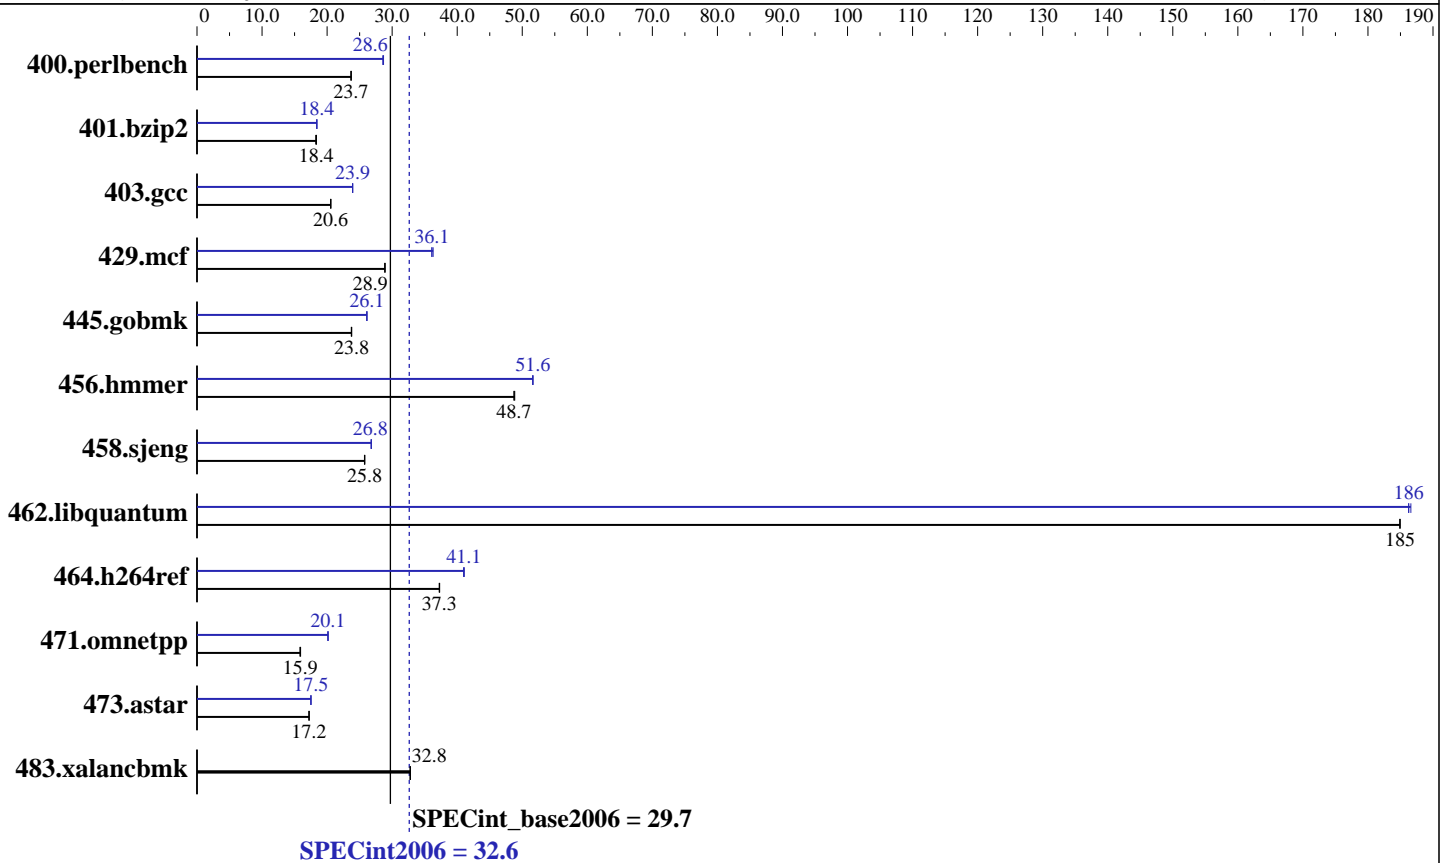

Hardware

CPU Name: Intel Core i5-660
 CPU Characteristics: Intel Turbo Boost Technology up to 3.6 GHz
 CPU MHz: 3333
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 4 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB (2x4 GB PC3-10600U, 2 rank, CL9)
 Disk Subsystem: 1 x SATA II, 400 GB, 7200 rpm
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64), kernel 2.6.27.19-5-default
 Compiler: Intel C++ Compiler for IA32 and Intel 64, Version 11.1 Build 20091012 Package ID: 1_cproc_p_11.1.059
 Auto Parallel: Yes
 File System: ext3
 System State: Multi-User Run Level 3
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 32.6

CELSIUS W380, Intel Core i5-660

SPECint_base2006 = 29.7

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Jan-2010
Hardware Availability: Jan-2010
Software Availability: Oct-2009

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	413	23.7	412	23.7	413	23.7	342	28.6	341	28.7	341	28.6
401.bzip2	526	18.4	526	18.4	529	18.2	524	18.4	524	18.4	524	18.4
403.gcc	391	20.6	391	20.6	392	20.5	336	23.9	336	23.9	337	23.9
429.mcf	316	28.9	315	28.9	316	28.9	253	36.1	253	36.1	251	36.3
445.gobmk	441	23.8	442	23.7	441	23.8	402	26.1	401	26.1	402	26.1
456.hammer	191	48.8	191	48.7	191	48.7	181	51.6	181	51.7	181	51.6
458.sjeng	469	25.8	469	25.8	470	25.7	452	26.8	452	26.8	452	26.8
462.libquantum	112	185	112	185	112	185	111	186	111	187	111	186
464.h264ref	594	37.3	593	37.3	594	37.2	539	41.1	539	41.1	540	41.0
471.omnetpp	392	15.9	394	15.9	395	15.8	310	20.2	311	20.1	310	20.1
473.astar	407	17.2	408	17.2	408	17.2	401	17.5	401	17.5	401	17.5
483.xalancbmk	210	32.8	211	32.7	210	32.8	210	32.8	211	32.7	210	32.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

General Notes

OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 32.6

CELSIUS W380, Intel Core i5-660

SPECint_base2006 = 29.7

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Jan-2010
Hardware Availability: Jan-2010
Software Availability: Oct-2009

Base Portability Flags (Continued)

456.hmmcr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel
-par-runtime-control -opt-prefetch

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

400.perlbench: icc -m32
429.mcf: icc -m32
445.gobmk: icc -m32
464.h264ref: icc -m32

C++ benchmarks (except as noted below):
icpc -m64

471.omnetpp: icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 32.6

CELSIUS W380, Intel Core i5-660

SPECint_base2006 = 29.7

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Jan-2010
Hardware Availability: Jan-2010
Software Availability: Oct-2009

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias -opt-prefetch
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div -static(pass 2) -prof-use(pass 2)
-auto-ilp32 -opt-prefetch -ansi-alias
403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-alloc
-opt-malloc-options=3 -auto-ilp32
429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias
456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4
462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel
-par-runtime-control -opt-prefetch
-par-schedule-static=32768 -ansi-alias
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 32.6

CELSIUS W380, Intel Core i5-660

SPECint_base2006 = 29.7

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jan-2010

Hardware Availability: Jan-2010

Software Availability: Oct-2009

Peak Optimization Flags (Continued)

471.omnetpp (continued):

-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)

-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)

-ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs

-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revD.20100119.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revD.20100119.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 06:07:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 March 2010.