



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

## SPECfp<sup>®</sup>\_rate2006 = 199

## Gateway GR380 F1 (Intel Xeon X5570)

## SPECfp\_rate\_base2006 = 194

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Jan-2010

Hardware Availability: Jan-2010

Software Availability: Sep-2009

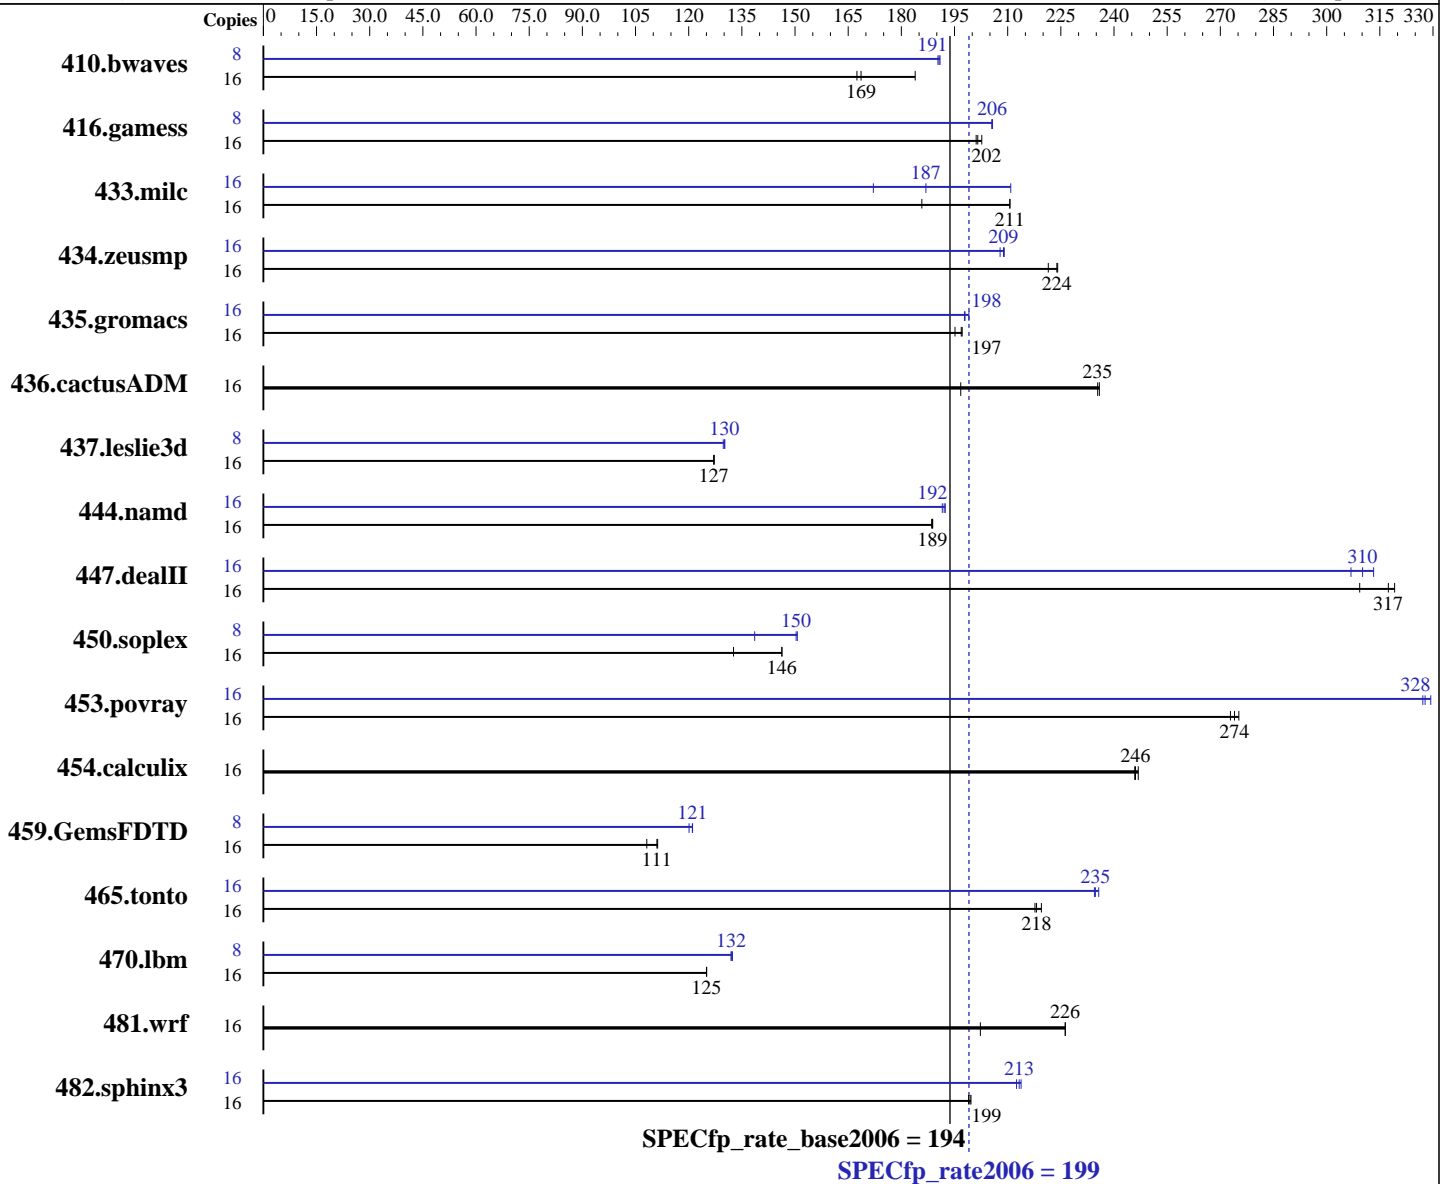

### Hardware

CPU Name: Intel Xeon X5570  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz  
 CPU MHz: 2933  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64)  
 Kernel 2.6.27.19-5  
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1  
 Build 20091012 Package ID: l\_cproc\_p\_11.1.059, l\_cprof\_p\_11.1.059  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp\_rate2006 = 199

Gateway GR380 F1 (Intel Xeon X5570)

SPECfp\_rate\_base2006 = 194

CPU2006 license: 97

Test date: Jan-2010

Test sponsor: Acer Incorporated

Hardware Availability: Jan-2010

Tested by: Acer Incorporated

Software Availability: Sep-2009

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 24 GB (6 x 4GB DDR3-1333 RDIMM)  
Disk Subsystem: 1 x 500 GB SATA II, 7200 RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	<b><u>1289</u></b>	<b><u>169</u></b>	1182	184	1298	167	8	<b><u>570</u></b>	<b><u>191</u></b>	569	191	571	190
416.gamess	16	1558	201	<b><u>1554</u></b>	<b><u>202</u></b>	1546	203	8	761	206	762	206	<b><u>762</u></b>	<b><u>206</u></b>
433.milc	16	791	186	<b><u>697</u></b>	<b><u>211</u></b>	697	211	16	697	211	<b><u>786</u></b>	<b><u>187</u></b>	853	172
434.zeusmp	16	<b><u>650</u></b>	<b><u>224</u></b>	657	221	650	224	16	<b><u>697</u></b>	<b><u>209</u></b>	697	209	700	208
435.gromacs	16	<b><u>580</u></b>	<b><u>197</u></b>	585	195	579	197	16	<b><u>577</u></b>	<b><u>198</u></b>	578	198	574	199
436.cactusADM	16	972	197	811	236	<b><u>812</u></b>	<b><u>235</u></b>	16	972	197	811	236	<b><u>812</u></b>	<b><u>235</u></b>
437.leslie3d	16	1183	127	<b><u>1183</u></b>	<b><u>127</u></b>	1184	127	8	<b><u>578</u></b>	<b><u>130</u></b>	580	130	578	130
444.namd	16	679	189	<b><u>680</u></b>	<b><u>189</u></b>	681	189	16	670	192	667	192	<b><u>668</u></b>	<b><u>192</u></b>
447.dealII	16	592	309	573	319	<b><u>577</u></b>	<b><u>317</u></b>	16	<b><u>590</u></b>	<b><u>310</u></b>	596	307	584	313
450.soplex	16	1006	133	912	146	<b><u>912</u></b>	<b><u>146</u></b>	8	481	139	<b><u>444</u></b>	<b><u>150</u></b>	443	151
453.povray	16	312	273	309	275	<b><u>311</u></b>	<b><u>274</u></b>	16	<b><u>260</u></b>	<b><u>328</u></b>	258	329	260	327
454.calculix	16	535	247	<b><u>536</u></b>	<b><u>246</u></b>	537	246	16	535	247	<b><u>536</u></b>	<b><u>246</u></b>	537	246
459.GemsFDTD	16	1569	108	<b><u>1529</u></b>	<b><u>111</u></b>	1526	111	8	701	121	<b><u>701</u></b>	<b><u>121</u></b>	707	120
465.tonto	16	723	218	717	220	<b><u>722</u></b>	<b><u>218</u></b>	16	668	236	671	234	<b><u>671</u></b>	<b><u>235</u></b>
470.lbm	16	1758	125	<b><u>1758</u></b>	<b><u>125</u></b>	1759	125	8	830	132	833	132	<b><u>833</u></b>	<b><u>132</u></b>
481.wrf	16	883	202	<b><u>790</u></b>	<b><u>226</u></b>	790	226	16	883	202	<b><u>790</u></b>	<b><u>226</u></b>	790	226
482.sphinx3	16	1567	199	<b><u>1564</u></b>	<b><u>199</u></b>	1562	200	16	1468	212	1459	214	<b><u>1462</u></b>	<b><u>213</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was set for stacksize unlimited

## General Notes

This result was measured on the Gateway GR380 F1.  
The Acer AR380 F1 and Gateway GR380 F1 are electronically equivalent.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp\_rate2006 = 199

Gateway GR380 F1 (Intel Xeon X5570)

SPECfp\_rate\_base2006 = 194

CPU2006 license: 97

Test date: Jan-2010

Test sponsor: Acer Incorporated

Hardware Availability: Jan-2010

Tested by: Acer Incorporated

Software Availability: Sep-2009

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.lelie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp\_rate2006 = 199

Gateway GR380 F1 (Intel Xeon X5570)

SPECfp\_rate\_base2006 = 194

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Jan-2010

Hardware Availability: Jan-2010

Software Availability: Sep-2009

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -opt-malloc-options=3 -ansi-alias -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp\_rate2006 = 199

Gateway GR380 F1 (Intel Xeon X5570)

SPECfp\_rate\_base2006 = 194

CPU2006 license: 97

Test date: Jan-2010

Test sponsor: Acer Incorporated

Hardware Availability: Jan-2010

Tested by: Acer Incorporated

Software Availability: Sep-2009

## Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

### C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)

437.leslie3d: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -auto -inline-calloc -opt-malloc-options=3

### Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp\_rate2006 = 199

Gateway GR380 F1 (Intel Xeon X5570)

SPECfp\_rate\_base2006 = 194

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Jan-2010

Hardware Availability: Jan-2010

Software Availability: Sep-2009

## Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-fp-linux64-revH.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-fp-linux64-revH.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 05:49:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 16 March 2010.