



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Incom S.A.

SPECint®\_rate2006 = 184

ADAX NetOfficePro X5530R500

SPECint\_rate\_base2006 = 175

CPU2006 license: 9025


Test date: Feb-2010

Test sponsor: Incom S.A.

Hardware Availability: Apr-2009

Tested by: Incom S.A.

Software Availability: Feb-2009

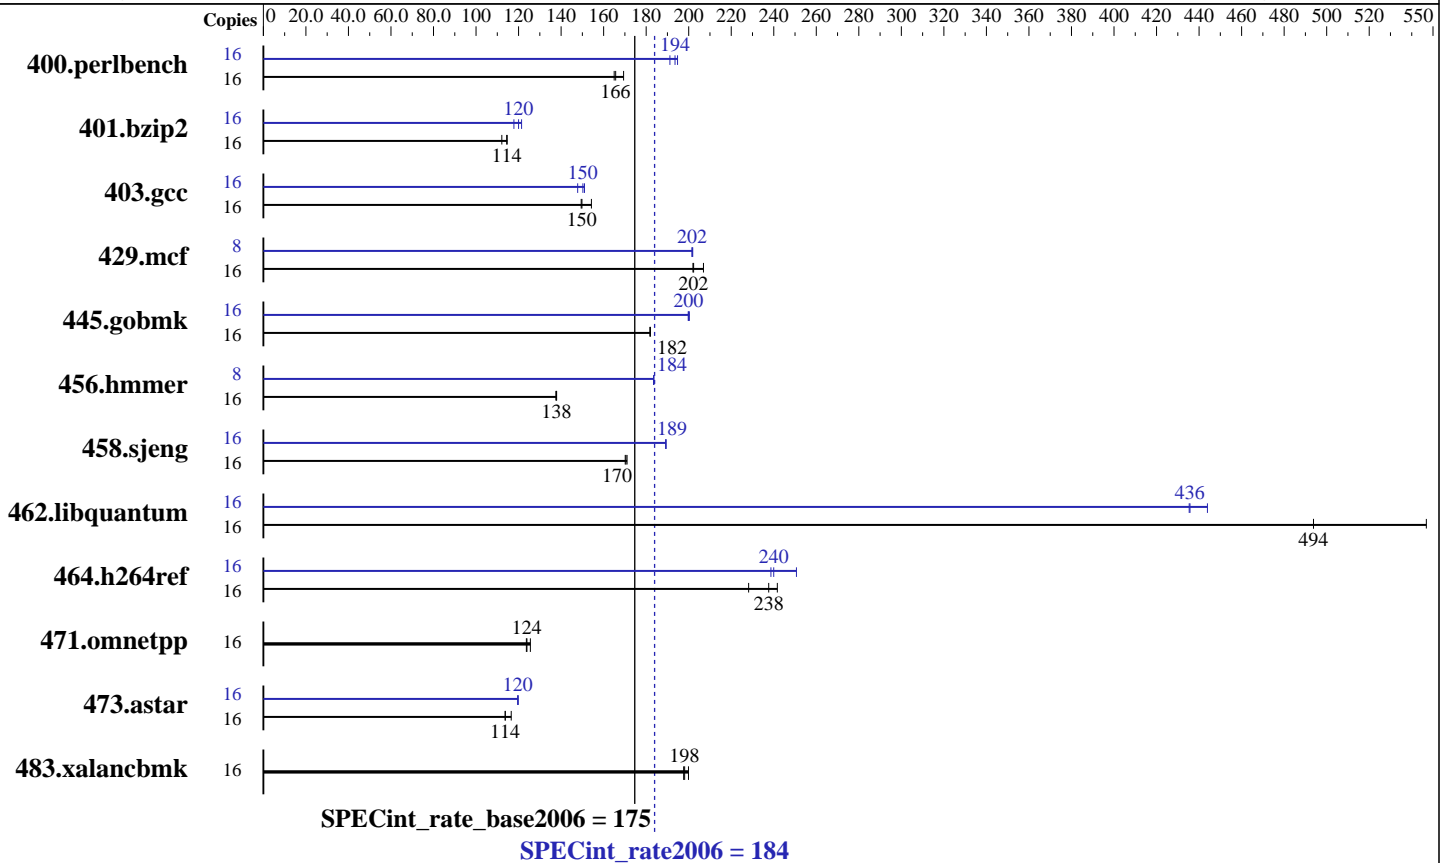

## Hardware

CPU Name: Intel Xeon E5530  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.67 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 32 GB (8x4 GB PC3 10600R, 2 rank, ECC, running at 1066 MHz)  
 Disk Subsystem: 500 GB SATA, 7200RPM  
 Other Hardware: None

## Software

Operating System: SuSe Linux Enterprise Server 10 (x86\_64) SP2, kernel 2.6.16.60-0.21-smp  
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20090131 Package ID: l\_cproc\_p\_11.0.080  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Incom S.A.

SPECint\_rate2006 = 184

ADAX NetOfficePro X5530R500

SPECint\_rate\_base2006 = 175

CPU2006 license: 9025

Test date: Feb-2010

Test sponsor: Incom S.A.

Hardware Availability: Apr-2009

Tested by: Incom S.A.

Software Availability: Feb-2009

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	<b>944</b>	<b>166</b>	923	169	948	165	16	803	195	<b>808</b>	<b>194</b>	818	191
401.bzip2	16	1347	115	1377	112	<b>1350</b>	<b>114</b>	16	1311	118	1272	121	<b>1287</b>	<b>120</b>
403.gcc	16	835	154	<b>860</b>	<b>150</b>	862	149	16	853	151	<b>857</b>	<b>150</b>	871	148
429.mcf	16	705	207	722	202	<b>721</b>	<b>202</b>	8	362	202	361	202	<b>362</b>	<b>202</b>
445.gobmk	16	922	182	<b>923</b>	<b>182</b>	923	182	16	840	200	<b>840</b>	<b>200</b>	838	200
456.hammer	16	<b>1083</b>	<b>138</b>	1083	138	1085	138	8	407	183	<b>407</b>	<b>184</b>	407	184
458.sjeng	16	1138	170	1132	171	<b>1136</b>	<b>170</b>	16	1023	189	1023	189	<b>1023</b>	<b>189</b>
462.libquantum	16	606	547	671	494	<b>671</b>	<b>494</b>	16	761	435	<b>761</b>	<b>436</b>	747	444
464.h264ref	16	1465	242	<b>1490</b>	<b>238</b>	1552	228	16	1413	251	<b>1475</b>	<b>240</b>	1484	239
471.omnetpp	16	797	126	<b>807</b>	<b>124</b>	809	124	16	797	126	<b>807</b>	<b>124</b>	809	124
473.astar	16	964	117	<b>987</b>	<b>114</b>	988	114	16	939	120	<b>938</b>	<b>120</b>	938	120
483.xalanbmk	16	552	200	<b>557</b>	<b>198</b>	559	198	16	552	200	<b>557</b>	<b>198</b>	559	198

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalanbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-alloc  
-opt-malloc-options=3 -opt-prefetch

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Incom S.A.

SPECint\_rate2006 = 184

ADAX NetOfficePro X5530R500

SPECint\_rate\_base2006 = 175

CPU2006 license: 9025

Test date: Feb-2010

Test sponsor: Incom S.A.

Hardware Availability: Apr-2009

Tested by: Incom S.A.

Software Availability: Feb-2009

## Base Optimization Flags (Continued)

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/080/bin/intel64/icc

456.hmmer: /opt/intel/Compiler/11.0/080/bin/intel64/icc

458.sjeng: /opt/intel/Compiler/11.0/080/bin/intel64/icc

C++ benchmarks (except as noted below):

icpc

473.astar: /opt/intel/Compiler/11.0/080/bin/intel64/icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

473.astar: -DSPEC\_CPU\_LP64

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -ansi-alias -opt-prefetch

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Incom S.A.

SPECint\_rate2006 = 184

ADAX NetOfficePro X5530R500

SPECint\_rate\_base2006 = 175

CPU2006 license: 9025

Test date: Feb-2010

Test sponsor: Incom S.A.

Hardware Availability: Apr-2009

Tested by: Incom S.A.

Software Availability: Feb-2009

## Peak Optimization Flags (Continued)

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-alloc  
-opt-malloc-options=3

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
-ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static  
-opt-malloc-options=3 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=routine -auto-ilp32  
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Incom S.A.

SPECint\_rate2006 = 184

ADAX NetOfficePro X5530R500

SPECint\_rate\_base2006 = 175

CPU2006 license: 9025

Test date: Feb-2010

Test sponsor: Incom S.A.

Hardware Availability: Apr-2009

Tested by: Incom S.A.

Software Availability: Feb-2009

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090901.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090901.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 05:46:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 16 March 2010.