



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint®_rate2006 = 648

NovaScale R480 F2 (Intel Xeon L7555, 1.87 GHz)

SPECint_rate_base2006 = 604

CPU2006 license: 20


Test date: Feb-2010

Test sponsor: Bull SAS

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

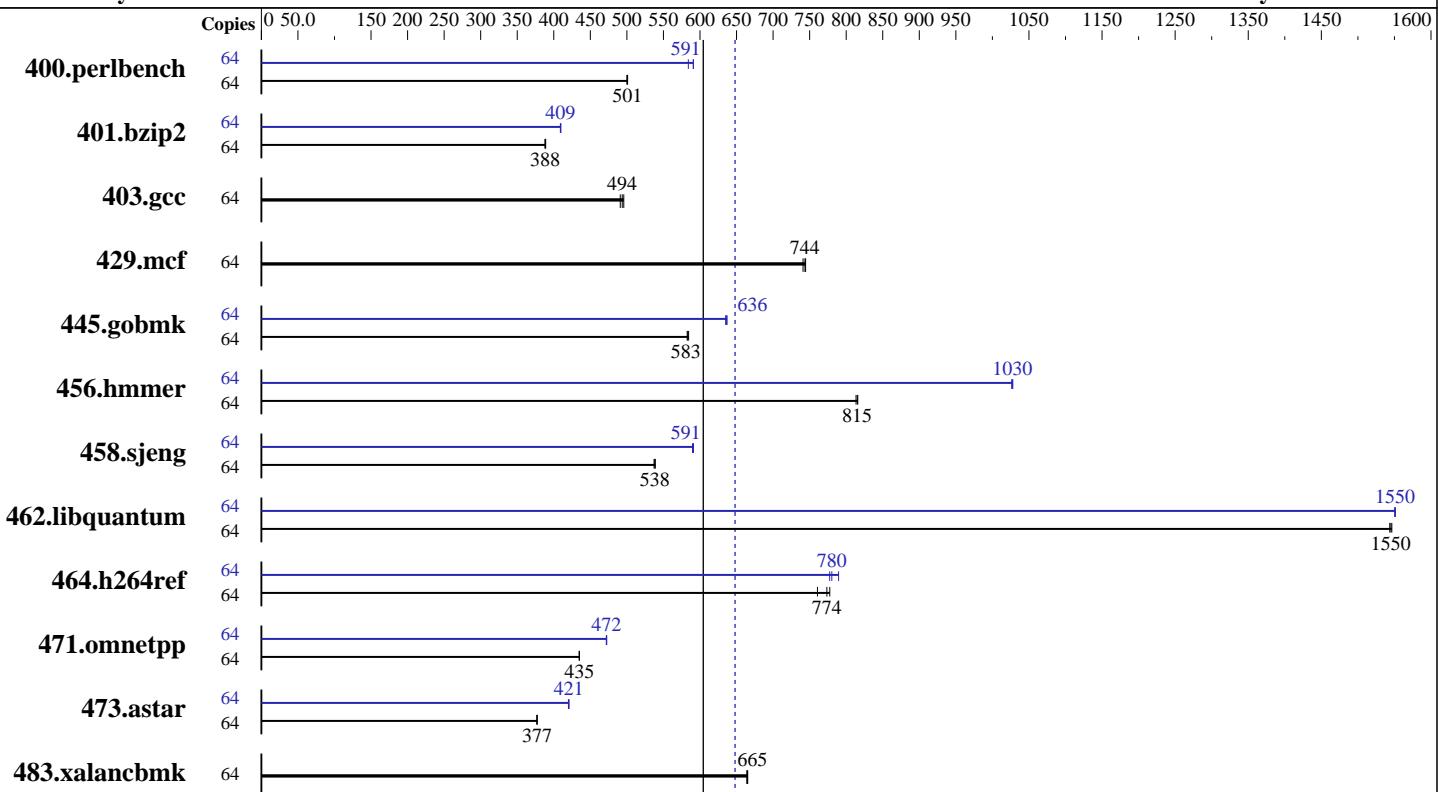

SPECint_rate_base2006 = 604

SPECint_rate2006 = 648

Hardware

CPU Name: Intel Xeon L7555
 CPU Characteristics: Intel Turbo Boost Technology up to 2.53 GHz
 CPU MHz: 1866
 FPU: Integrated
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 24 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (64 x 4 GB DDR3-1067 QR RDIMM)
 Disk Subsystem: 1 x 300 GB 10000 RPM SAS 6Gb
 Other Hardware: None

Operating System:

Red Hat Linux Enterprise Linux 5 (x86_64) Update 4 errata kernel (RHEL 5.4.z)

kernel-2.6.18-164.9.1.el5.x86_64

Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1

Build 20091130 Package ID: l_cproc_p_11.1.064

Auto Parallel: No
 File System: ext3

System State: Run level 5 (multi-user mode, with display manager as well as console logins)

Base Pointers: 32-bit
 Peak Pointers: 32/64-bit

Other Software: Binutils 2.17.50.0.6-12.el5

Software



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 648

NovaScale R480 F2 (Intel Xeon L7555, 1.87 GHz)

SPECint_rate_base2006 = 604

CPU2006 license: 20

Test date: Feb-2010

Test sponsor: Bull SAS

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	1248	501	1251	500	1249	501	64	1058	591	1058	591	1071	584
401.bzip2	64	1591	388	1588	389	1591	388	64	1510	409	1507	410	1509	409
403.gcc	64	1049	491	1044	494	1039	496	64	1049	491	1044	494	1039	496
429.mcf	64	788	741	785	744	784	744	64	788	741	785	744	784	744
445.gobmk	64	1149	584	1151	583	1153	582	64	1057	635	1055	636	1054	637
456.hammer	64	734	813	732	816	733	815	64	582	1030	581	1030	581	1030
458.sjeng	64	1437	539	1439	538	1442	537	64	1310	591	1313	590	1310	591
462.libquantum	64	858	1550	858	1550	859	1540	64	855	1550	855	1550	855	1550
464.h264ref	64	1821	778	1831	774	1862	761	64	1822	777	1794	790	1815	780
471.omnetpp	64	920	435	919	435	920	435	64	847	472	847	472	848	472
473.astar	64	1191	377	1191	377	1192	377	64	1068	421	1068	421	1070	420
483.xalancbmk	64	664	665	664	665	665	664	64	664	665	664	665	665	664

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

vm.zone_reclaim_mode = 1 in /etc/sysctl.conf file

BIOS Settings:

Power Management = Maximum Performance (Default = Active Power Controller)

General Notes

The Dell PowerEdge R910 and the Bull NovaScale R480 F2 models are electronically equivalent.
The results have been measured on a Dell PowerEdge R910 model.

Base Compiler Invocation

C benchmarks:

icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R480 F2 (Intel Xeon L7555, 1.87 GHz)

SPECint_rate2006 = 648

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Feb-2010

Hardware Availability: Mar-2010

Software Availability: Dec-2009

Base Compiler Invocation (Continued)

C++ benchmarks:

`icpc -m32`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

401.bzip2: `icc -m64`

456.hmmr: `icc -m64`

458.sjeng: `icc -m64`

462.libquantum: `icc -m64`

C++ benchmarks (except as noted below):

`icpc -m32`

473.astar: `icpc -m64`



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R480 F2 (Intel Xeon L7555, 1.87 GHz)

SPECint_rate2006 = 648

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Feb-2010

Hardware Availability: Mar-2010

Software Availability: Dec-2009

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
 401.bzip2: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
               -prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
               -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
               -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll12
               -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
               -prof-use(pass 2) -unroll14 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32
                  -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
               -prof-use(pass 2) -unroll12 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
               -L/home/cmplr/usr3/alrahate/cpu2006.1.1.icl1.1/libicl1.1-32bit -lsmartheap
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R480 F2 (Intel Xeon L7555, 1.87 GHz)

SPECint_rate2006 = 648

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Feb-2010

Hardware Availability: Mar-2010

Software Availability: Dec-2009

Peak Optimization Flags (Continued)

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
           -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
           -L/home/cmpllr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64
```

```
483.xalancbmk: basepeak = yes
```

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 06:12:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 31 March 2010.