



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Incom S.A.

SPECint®\_rate2006 = 127

ADAX NetOfficePro X5504R500

SPECint\_rate\_base2006 = 119

CPU2006 license: 9025


Test date: Mar-2010

Test sponsor: Incom S.A.

Hardware Availability: Apr-2009

Tested by: Incom S.A.

Software Availability: Feb-2009

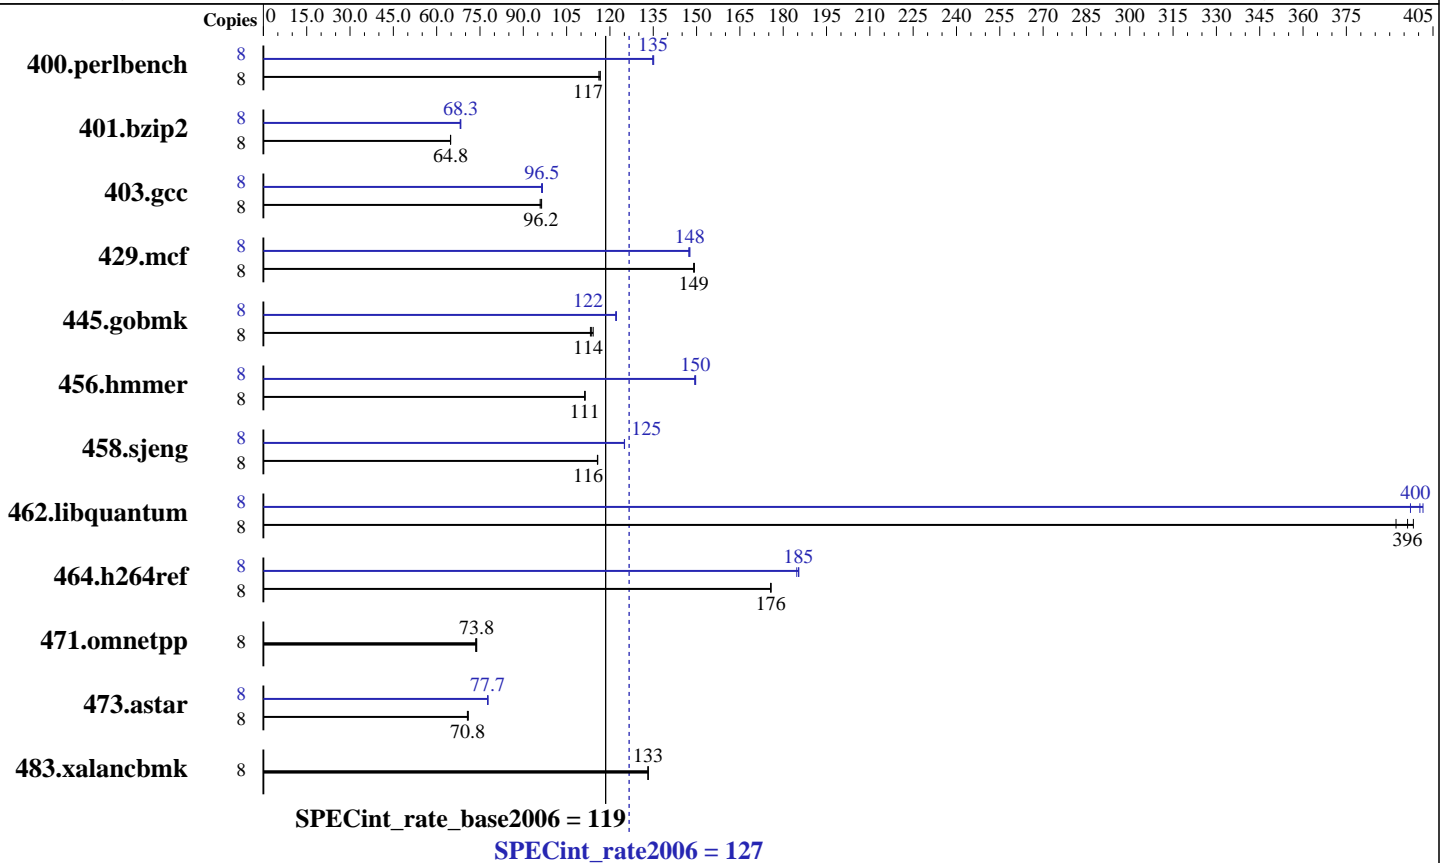

## Hardware

CPU Name: Intel Xeon E5504  
 CPU Characteristics:  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 4 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 32 GB (8 x 4 GB PC3-8500, 1066 MHz, DDR3, ECC, downclocked to 800 MHz)  
 Disk Subsystem: 500 GB SATA, 7200RPM  
 Other Hardware: None

## Software

Operating System: SuSe Linux Enterprise Server 10 (x86\_64) SP2, kernel 2.6.16.60-0.21-smp  
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20090131 Package ID: l\_cproc\_p\_11.0.080  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Incom S.A.

SPECint\_rate2006 = 127

ADAX NetOfficePro X5504R500

SPECint\_rate\_base2006 = 119

CPU2006 license: 9025  
Test sponsor: Incom S.A.  
Tested by: Incom S.A.

Test date: Mar-2010  
Hardware Availability: Apr-2009  
Software Availability: Feb-2009

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	<b>670</b>	<b>117</b>	673	116	670	117	8	578	135	<b>579</b>	<b>135</b>	580	135
401.bzip2	8	<b>1191</b>	<b>64.8</b>	1192	64.8	1190	64.9	8	1133	68.1	<b>1130</b>	<b>68.3</b>	1130	68.3
403.gcc	8	672	95.8	<b>670</b>	<b>96.2</b>	668	96.3	8	666	96.7	<b>667</b>	<b>96.5</b>	669	96.3
429.mcf	8	<b>489</b>	<b>149</b>	489	149	490	149	8	495	147	<b>494</b>	<b>148</b>	494	148
445.gobmk	8	<b>738</b>	<b>114</b>	735	114	741	113	8	688	122	<b>687</b>	<b>122</b>	687	122
456.hammer	8	<b>671</b>	<b>111</b>	670	111	671	111	8	500	149	<b>499</b>	<b>150</b>	499	150
458.sjeng	8	837	116	<b>836</b>	<b>116</b>	836	116	8	774	125	774	125	<b>774</b>	<b>125</b>
462.libquantum	8	423	392	<b>418</b>	<b>396</b>	416	398	8	<b>414</b>	<b>400</b>	417	397	413	402
464.h264ref	8	1007	176	1008	176	<b>1007</b>	<b>176</b>	8	959	185	955	185	<b>955</b>	<b>185</b>
471.omnetpp	8	680	73.5	677	73.9	<b>677</b>	<b>73.8</b>	8	680	73.5	677	73.9	<b>677</b>	<b>73.8</b>
473.astar	8	<b>793</b>	<b>70.8</b>	791	71.0	795	70.6	8	<b>723</b>	<b>77.7</b>	722	77.8	723	77.6
483.xalanbmk	8	<b>414</b>	<b>133</b>	414	133	415	133	8	<b>414</b>	<b>133</b>	414	133	415	133

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Base Compiler Invocation

C benchmarks:  
icc  
  
C++ benchmarks:  
icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalanbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-alloc  
-opt-malloc-options=3 -opt-prefetch

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Incom S.A.

SPECint\_rate2006 = 127

ADAX NetOfficePro X5504R500

SPECint\_rate\_base2006 = 119

CPU2006 license: 9025

Test date: Mar-2010

Test sponsor: Incom S.A.

Hardware Availability: Apr-2009

Tested by: Incom S.A.

Software Availability: Feb-2009

## Base Optimization Flags (Continued)

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/080/bin/intel64/icc

456.hmmer: /opt/intel/Compiler/11.0/080/bin/intel64/icc

458.sjeng: /opt/intel/Compiler/11.0/080/bin/intel64/icc

C++ benchmarks (except as noted below):

icpc

473.astar: /opt/intel/Compiler/11.0/080/bin/intel64/icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

473.astar: -DSPEC\_CPU\_LP64

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -ansi-alias -opt-prefetch

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Incom S.A.

SPECint\_rate2006 = 127

ADAX NetOfficePro X5504R500

SPECint\_rate\_base2006 = 119

CPU2006 license: 9025

Test date: Mar-2010

Test sponsor: Incom S.A.

Hardware Availability: Apr-2009

Tested by: Incom S.A.

Software Availability: Feb-2009

## Peak Optimization Flags (Continued)

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
-ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static  
-opt-malloc-options=3 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=routine -auto-ilp32  
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Incom S.A.

SPECint\_rate2006 = 127

ADAX NetOfficePro X5504R500

SPECint\_rate\_base2006 = 119

CPU2006 license: 9025

Test date: Mar-2010

Test sponsor: Incom S.A.

Hardware Availability: Apr-2009

Tested by: Incom S.A.

Software Availability: Feb-2009

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090901.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090901.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 05:34:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 30 March 2010.