



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®_rate2006 = 360

IBM BladeCenter HS22V (Intel Xeon X5670)

SPECint_rate_base2006 = 336

CPU2006 license: 11


Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

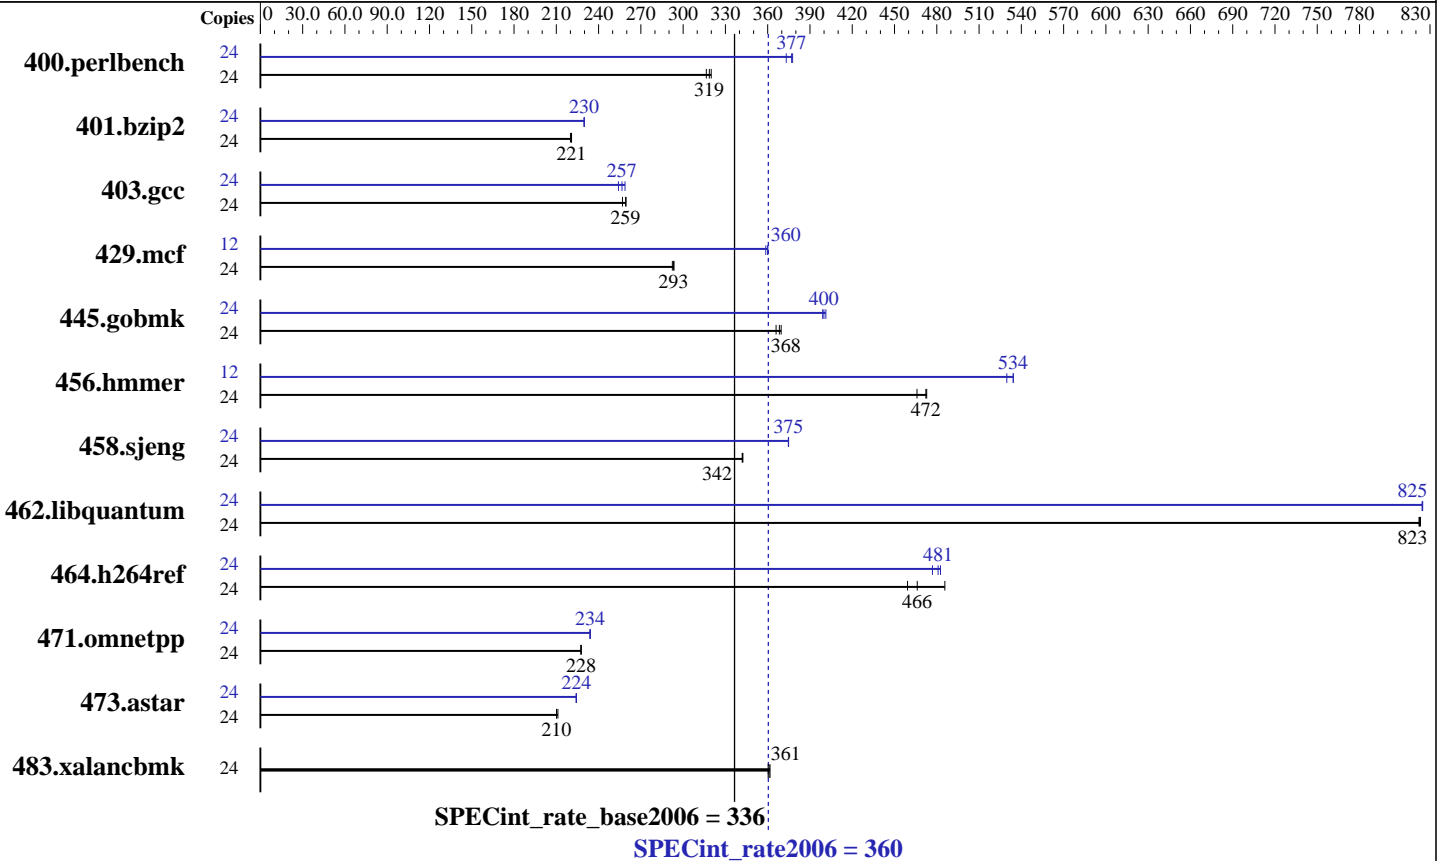

Hardware

CPU Name: Intel Xeon X5670
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz
 CPU MHz: 2933
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 96 GB (12 x 8 GB PC3-10600R)
 Disk Subsystem: 2 x 50 GB SATA, SSD
 Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1
 Build 20091130 Package ID: l_cproc_p_11.1.064
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1
 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 360

IBM BladeCenter HS22V (Intel Xeon X5670)

SPECint_rate_base2006 = 336

CPU2006 license: 11

Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	741	316	<u>736</u>	<u>319</u>	733	320	24	<u>622</u>	<u>377</u>	628	373	621	378
401.bzip2	24	1052	220	1049	221	<u>1049</u>	<u>221</u>	24	1008	230	1008	230	<u>1008</u>	<u>230</u>
403.gcc	24	752	257	745	260	<u>745</u>	<u>259</u>	24	760	254	<u>753</u>	<u>257</u>	747	259
429.mcf	24	749	292	746	293	<u>746</u>	<u>293</u>	12	<u>304</u>	<u>360</u>	305	359	304	360
445.gobmk	24	<u>684</u>	<u>368</u>	681	370	688	366	24	<u>630</u>	<u>400</u>	627	401	631	399
456.hammer	24	481	466	<u>474</u>	<u>472</u>	474	473	12	<u>210</u>	<u>534</u>	211	530	210	534
458.sjeng	24	849	342	<u>849</u>	<u>342</u>	848	342	24	775	375	<u>775</u>	<u>375</u>	775	375
462.libquantum	24	605	822	<u>605</u>	<u>823</u>	604	823	24	<u>603</u>	<u>825</u>	603	825	603	824
464.h264ref	24	1093	486	<u>1139</u>	<u>466</u>	1157	459	24	1100	483	1114	477	<u>1104</u>	<u>481</u>
471.omnetpp	24	<u>659</u>	<u>228</u>	659	227	659	228	24	641	234	641	234	<u>641</u>	<u>234</u>
473.astar	24	802	210	<u>802</u>	<u>210</u>	798	211	24	752	224	<u>751</u>	<u>224</u>	751	224
483.xalancbmk	24	458	362	<u>459</u>	<u>361</u>	460	360	24	458	362	<u>459</u>	<u>361</u>	460	360

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Platform Notes

Turbo Mode enabled
Turbo Boost set to Traditional
Power C-States enabled
Demand Scrub disabled

General Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 360

IBM BladeCenter HS22V (Intel Xeon X5670)

SPECint_rate_base2006 = 336

CPU2006 license: 11

Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.icl1.1/libicl1.1-32bit -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 360

IBM BladeCenter HS22V (Intel Xeon X5670)

SPECint_rate_base2006 = 336

CPU2006 license: 11

Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Peak Portability Flags (Continued)

456.hmmcr: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
 -ipo -no-prec-div -ansi-alias

456.hmmcr: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32
 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
 -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 360

IBM BladeCenter HS22V (Intel Xeon X5670)

SPECint_rate_base2006 = 336

CPU2006 license: 11

Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

473.astar (continued):

-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.03.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.03.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 05:29:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 30 March 2010.