



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint®2006 = 39.2

Motherboard X8DTE-F (Intel Xeon X5670, 2.93 GHz)

SPECint_base2006 = 36.5

CPU2006 license: 001176


Test date: Mar-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

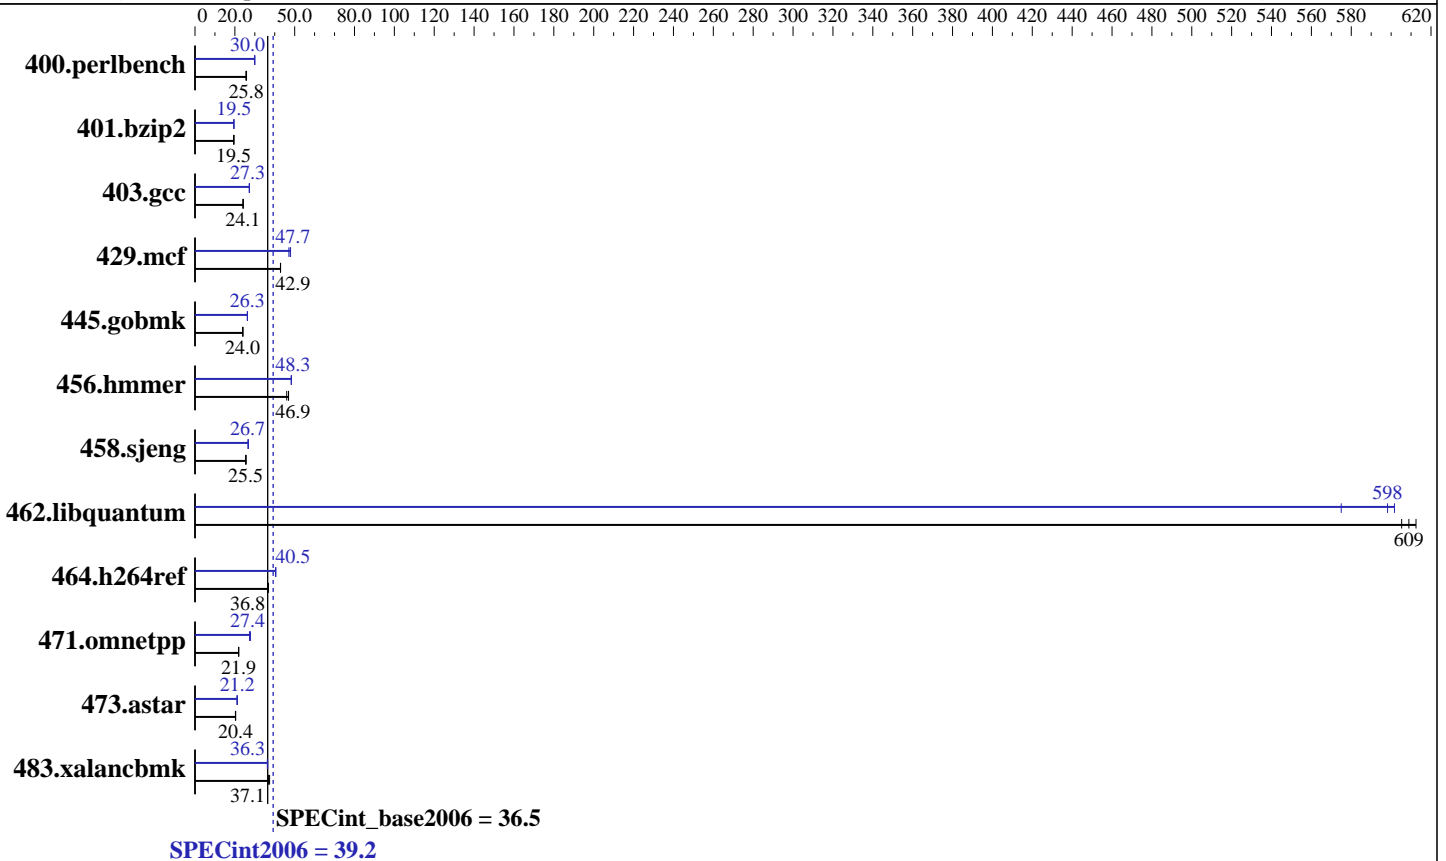

Hardware

CPU Name: Intel Xeon X5670
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz
 CPU MHz: 2933
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12 x 4 GB DDR3-1333 RDIMM, ECC, CL9)
 Disk Subsystem: 1 x 500 GB SATA II, 7200 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64)
 Kernel 2.6.27.19-5-default
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1
 Build 20091130 Package ID: l_cproc_p_11.1.064
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1
 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint2006 = 39.2

Motherboard X8DTE-F (Intel Xeon X5670, 2.93 GHz)

SPECint_base2006 = 36.5

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Mar-2010
Hardware Availability: Mar-2010
Software Availability: Jan-2010

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	383	25.5	<u>379</u>	<u>25.8</u>	378	25.9	326	30.0	326	29.9	<u>326</u>	<u>30.0</u>
401.bzip2	<u>496</u>	<u>19.5</u>	495	19.5	496	19.5	495	19.5	<u>495</u>	<u>19.5</u>	494	19.5
403.gcc	<u>333</u>	<u>24.1</u>	334	24.1	333	24.2	295	27.3	<u>295</u>	<u>27.3</u>	295	27.2
429.mcf	212	42.9	<u>213</u>	<u>42.9</u>	213	42.9	<u>191</u>	<u>47.7</u>	194	47.1	190	47.9
445.gobmk	438	24.0	437	24.0	<u>437</u>	<u>24.0</u>	399	26.3	399	26.3	<u>399</u>	<u>26.3</u>
456.hammer	<u>199</u>	<u>46.9</u>	199	46.9	203	46.0	193	48.3	193	48.3	<u>193</u>	<u>48.3</u>
458.sjeng	476	25.4	<u>475</u>	<u>25.5</u>	472	25.6	454	26.7	<u>453</u>	<u>26.7</u>	453	26.7
462.libquantum	<u>34.0</u>	<u>609</u>	33.8	612	34.2	605	34.4	602	36.0	575	<u>34.6</u>	<u>598</u>
464.h264ref	601	36.8	<u>601</u>	<u>36.8</u>	602	36.8	546	40.5	548	40.4	<u>546</u>	<u>40.5</u>
471.omnetpp	285	21.9	<u>285</u>	<u>21.9</u>	285	21.9	228	27.4	<u>228</u>	<u>27.4</u>	225	27.8
473.astar	344	20.4	346	20.3	<u>345</u>	<u>20.4</u>	331	21.2	332	21.1	<u>332</u>	<u>21.2</u>
483.xalancbmk	<u>186</u>	<u>37.1</u>	184	37.4	187	37.0	189	36.5	190	36.3	<u>190</u>	<u>36.3</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

Fan speed set to Full Speed in BIOS Setup.
As tested, the system used a Supermicro
PWS-865-PQ power supply, 2 SNK-P0038P heatsinks,
and 2 FAN-0077L cooling fans.

General Notes

OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint2006 = 39.2

Motherboard X8DTE-F (Intel Xeon X5670, 2.93 GHz)

SPECint_base2006 = 36.5

CPU2006 license: 001176

Test date: Mar-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

Base Portability Flags (Continued)

```

403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.icl1.1/libicl1.1-64bit -lsmartheap64
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

```
400.perlbench: icc -m32
```

```
429.mcf: icc -m32
```

```
445.gobmk: icc -m32
```

```
464.h264ref: icc -m32
```

C++ benchmarks (except as noted below):

```
icpc -m32
```

```
473.astar: icpc -m64
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint2006 = 39.2

Motherboard X8DTE-F (Intel Xeon X5670, 2.93 GHz)

SPECint_base2006 = 36.5

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Mar-2010
Hardware Availability: Mar-2010
Software Availability: Jan-2010

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalanbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias -opt-prefetch
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div -static(pass 2) -prof-use(pass 2)
-auto-ilp32 -opt-prefetch -ansi-alias
403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-alloc
-opt-malloc-options=3 -auto-ilp32
429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias
456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4
462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel
-opt-prefetch -par-schedule-static=32768 -ansi-alias
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint2006 = 39.2

Motherboard X8DTE-F (Intel Xeon X5670, 2.93 GHz)

SPECint_base2006 = 36.5

CPU2006 license: 001176

Test date: Mar-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
          -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
          -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64
```

```
483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
              -Wl,-z,muldefs
              -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap
```

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 07:23:13 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 April 2010.