



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint[®]_rate2006 = 381

ASUS TS700-E6 (Z8PE-D12X) server system (Intel Xeon X5680)

SPECint_rate_base2006 = 356

CPU2006 license: 9016


Test date: Mar-2010

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2010

Tested by: ASUSTeK Computer Inc.

Software Availability: Jan-2010

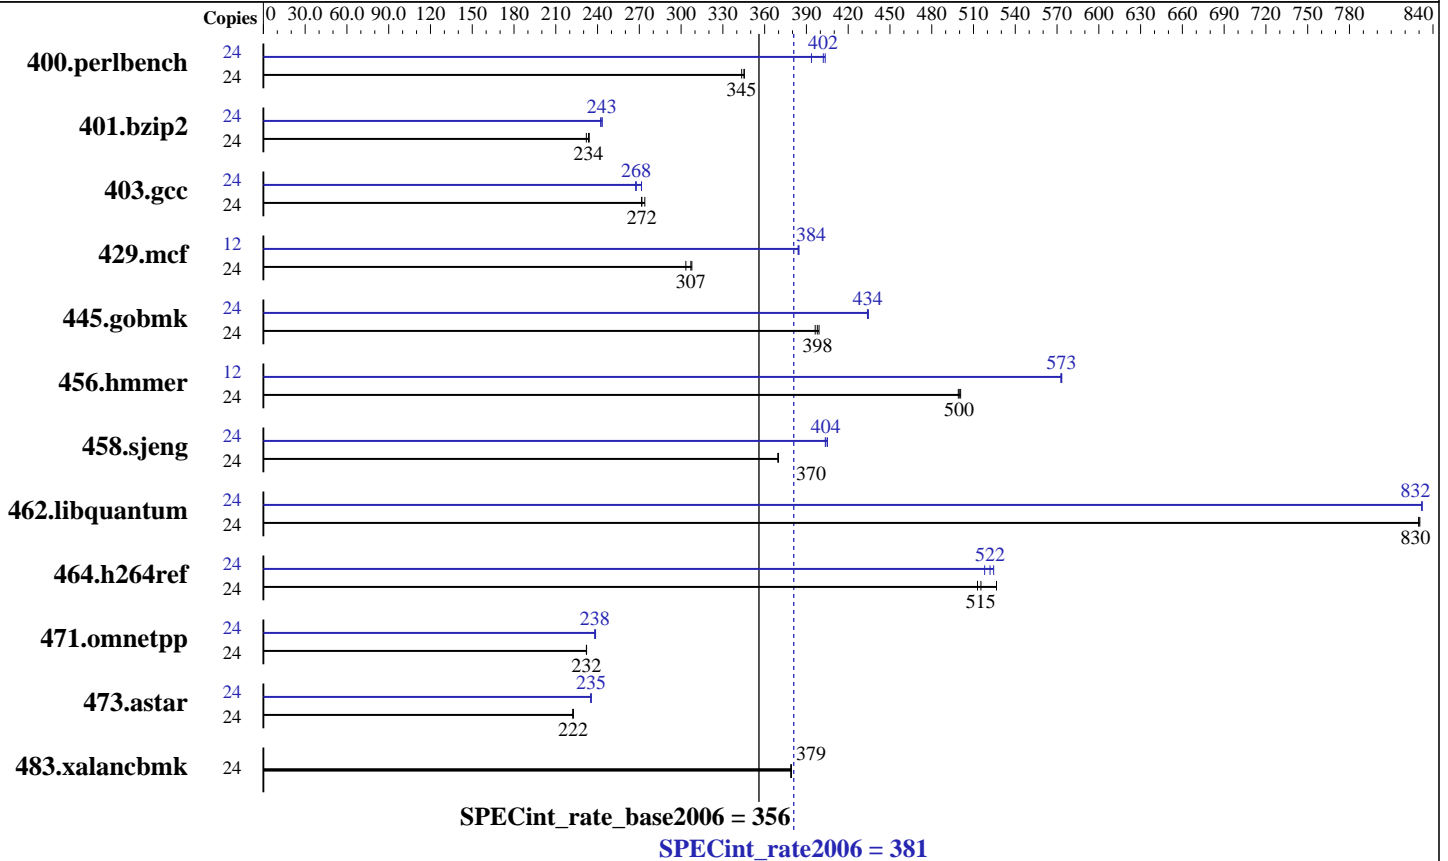

Hardware

CPU Name: Intel Xeon X5680
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 3333
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12 x 4 GB PC3-10600R, CL=9)
 Disk Subsystem: 1 x 500 GB SATAII, 7200RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1
 Build 20091130 Package ID: l_cproc_p_11.1.064
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1
 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint_rate2006 = 381

ASUS TS700-E6 (Z8PE-D12X) server system (Intel Xeon X5680)

SPECint_rate_base2006 = 356

CPU2006 license: 9016

Test date: Mar-2010

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2010

Tested by: ASUSTeK Computer Inc.

Software Availability: Jan-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	683	344	679	345	679	345	24	596	394	581	403	583	402
401.bzip2	24	998	232	990	234	992	234	24	956	242	952	243	953	243
403.gcc	24	705	274	711	272	711	272	24	721	268	723	267	711	272
429.mcf	24	721	303	713	307	711	308	12	285	385	285	384	285	384
445.gobmk	24	633	398	631	399	635	396	24	580	434	580	434	579	435
456.hammer	24	448	500	447	501	449	499	12	195	573	195	573	195	573
458.sjeng	24	786	370	785	370	786	370	24	719	404	720	404	717	405
462.libquantum	24	599	831	599	830	599	830	24	598	832	598	832	598	832
464.h264ref	24	1009	527	1031	515	1036	513	24	1013	524	1018	522	1025	518
471.omnetpp	24	646	232	646	232	647	232	24	630	238	629	239	630	238
473.astar	24	758	222	758	222	757	223	24	715	235	717	235	716	235
483.xalancbmk	24	437	379	437	379	437	379	24	437	379	437	379	437	379

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

Component Notes

Tested system case compliance with Intel EEB 3.61 spec
SSI Server Power Supply 650W or higher
System was configured with ASPEED AST2050 VGA (on board VGA)

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint_rate2006 = 381

ASUS TS700-E6 (Z8PE-D12X) server system (Intel Xeon X5680)

SPECint_rate_base2006 = 356

CPU2006 license: 9016

Test date: Mar-2010

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2010

Tested by: ASUSTeK Computer Inc.

Software Availability: Jan-2010

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.icl1.1/libic1.1-32bit -lsmarheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint_rate2006 = 381

ASUS TS700-E6 (Z8PE-D12X) server system (Intel Xeon X5680)

SPECint_rate_base2006 = 356

CPU2006 license: 9016

Test date: Mar-2010

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2010

Tested by: ASUSTeK Computer Inc.

Software Availability: Jan-2010

Peak Portability Flags (Continued)

456.hmmr: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
 -ipo -no-prec-div -ansi-alias

456.hmmr: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32
 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
 -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint_rate2006 = 381

ASUS TS700-E6 (Z8PE-D12X) server system (Intel Xeon X5680)

SPECint_rate_base2006 = 356

CPU2006 license: 9016

Test date: Mar-2010

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2010

Tested by: ASUSTeK Computer Inc.

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

473.astar (continued):

`-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmarthheap64`

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 09:40:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 April 2010.