



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

**SPECint®2006 = 39.3**

## Huawei BH620, Intel Xeon X5670

**SPECint\_base2006 = 36.2**

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2010

Hardware Availability: Jan-2010

Software Availability: Feb-2010

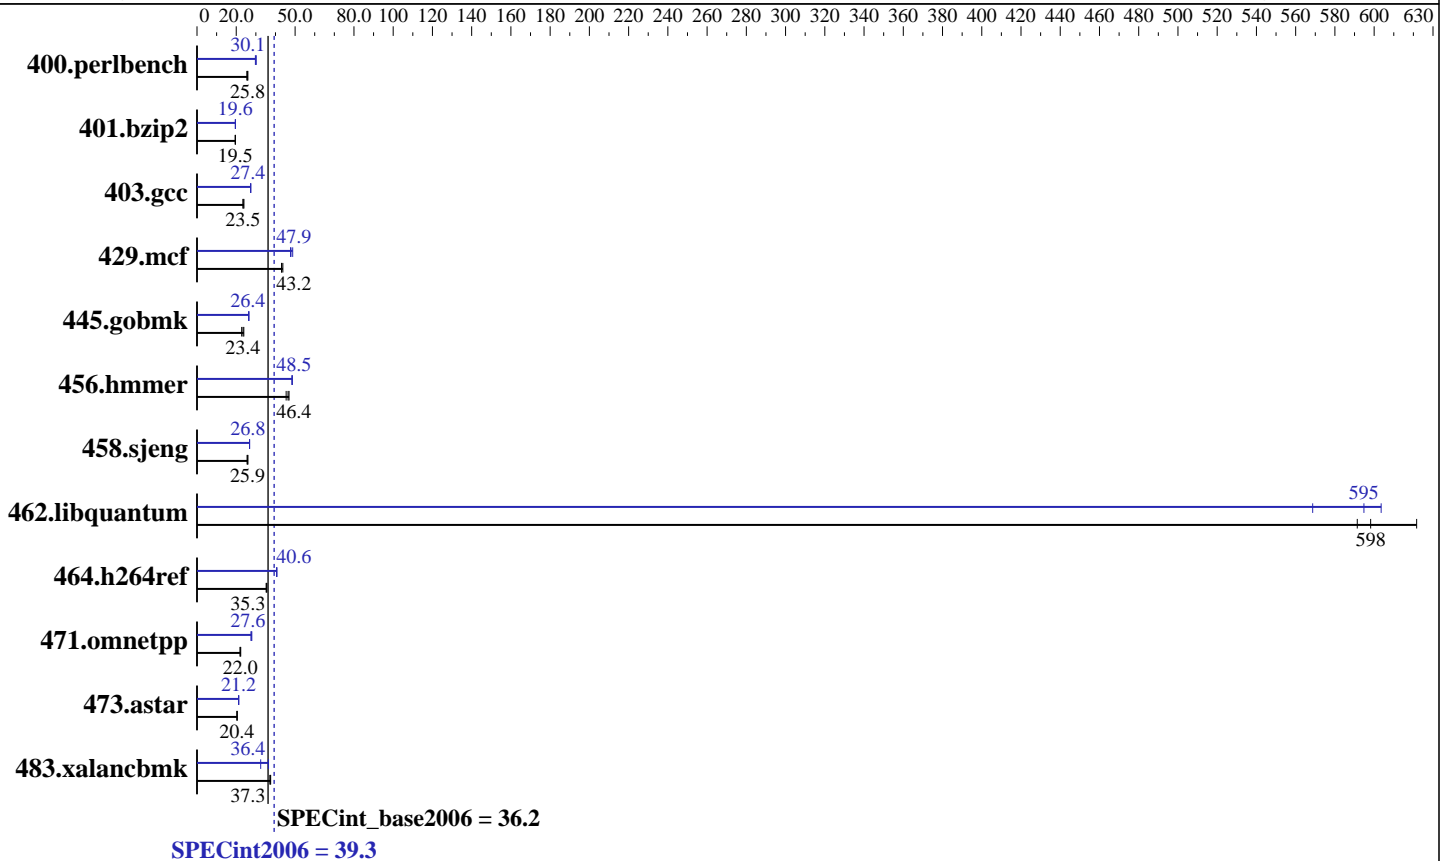

### Hardware

CPU Name: Intel Xeon X5670  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz  
 CPU MHz: 2933  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB PC3 10600R, dual rank, CL9, ECC)  
 Disk Subsystem: 1 x 146GB SAS,10k RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64)  
 Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1  
 Build 20091130 Package ID: l\_cproc\_p\_11.1.064  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 39.3

Huawei BH620, Intel Xeon X5670

SPECint\_base2006 = 36.2

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Mar-2010  
Hardware Availability: Jan-2010  
Software Availability: Feb-2010

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	385	25.4	378	25.9	<b><u>378</u></b>	<b><u>25.8</u></b>	<b><u>325</u></b>	<b><u>30.1</u></b>	325	30.1	328	29.8
401.bzip2	493	19.6	494	19.5	<b><u>494</u></b>	<b><u>19.5</u></b>	<b><u>493</u></b>	<b><u>19.6</u></b>	492	19.6	494	19.6
403.gcc	343	23.5	<b><u>343</u></b>	<b><u>23.5</u></b>	336	23.9	294	27.4	<b><u>294</u></b>	<b><u>27.4</u></b>	294	27.4
429.mcf	208	43.8	212	43.1	<b><u>211</u></b>	<b><u>43.2</u></b>	191	47.7	<b><u>190</u></b>	<b><u>47.9</u></b>	187	48.8
445.gobmk	440	23.9	461	22.8	<b><u>448</u></b>	<b><u>23.4</u></b>	397	26.4	<b><u>398</u></b>	<b><u>26.4</u></b>	398	26.4
456.hammer	<b><u>201</u></b>	<b><u>46.4</u></b>	205	45.4	199	46.9	<b><u>192</u></b>	<b><u>48.5</u></b>	192	48.5	193	48.4
458.sjeng	<b><u>468</u></b>	<b><u>25.9</u></b>	474	25.5	468	25.9	452	26.8	451	26.8	<b><u>452</u></b>	<b><u>26.8</u></b>
462.libquantum	35.0	591	<b><u>34.6</u></b>	<b><u>598</u></b>	33.3	622	<b><u>34.8</u></b>	<b><u>595</u></b>	34.3	604	36.4	569
464.h264ref	627	35.3	621	35.6	<b><u>626</u></b>	<b><u>35.3</u></b>	<b><u>544</u></b>	<b><u>40.6</u></b>	544	40.7	545	40.6
471.omnetpp	280	22.3	284	22.0	<b><u>284</u></b>	<b><u>22.0</u></b>	226	27.6	224	27.9	<b><u>226</u></b>	<b><u>27.6</u></b>
473.astar	345	20.4	<b><u>344</u></b>	<b><u>20.4</u></b>	343	20.5	<b><u>330</u></b>	<b><u>21.2</u></b>	330	21.3	331	21.2
483.xalancbmk	<b><u>185</u></b>	<b><u>37.3</u></b>	185	37.2	184	37.5	189	36.5	213	32.5	<b><u>190</u></b>	<b><u>36.4</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

## General Notes

OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to granularity=fine,scatter  
Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

## Base Compiler Invocation

C benchmarks:  
icc -m64  
  
C++ benchmarks:  
icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 39.3

Huawei BH620, Intel Xeon X5670

SPECint\_base2006 = 36.2

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2010

Hardware Availability: Jan-2010

Software Availability: Feb-2010

## Base Portability Flags (Continued)

445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 471.omnetpp: -DSPEC\_CPU\_LP64  
 473.astar: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

429.mcf: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 39.3

Huawei BH620, Intel Xeon X5670

SPECint\_base2006 = 36.2

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2010

Hardware Availability: Jan-2010

Software Availability: Feb-2010

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
 401.bzip2: -DSPEC\_CPU\_LP64  
 403.gcc: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 473.astar: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div -static(pass 2) -prof-use(pass 2)  
 -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-alloc  
 -opt-malloc-options=3 -auto-ilp32

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -unroll4

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel  
 -opt-prefetch -par-schedule-static=32768 -ansi-alias

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
 -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei	SPECint2006 =	39.3
Huawei BH620, Intel Xeon X5670	SPECint_base2006 =	36.2

CPU2006 license: 3175	Test date:	Mar-2010
Test sponsor: Huawei	Hardware Availability:	Jan-2010
Tested by: Huawei	Software Availability:	Feb-2010

## Peak Optimization Flags (Continued)

```

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
          -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
          -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
              -Wl,-z,muldefs
              -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

```

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 07:56:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 17 May 2010.