



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 F2
(Intel Xeon E5506, 2.13 GHz)

SPECfp[®]_rate2006 = 120

SPECfp_rate_base2006 = 116

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Mar-2010

Hardware Availability: Jan-2010

Software Availability: Dec-2009

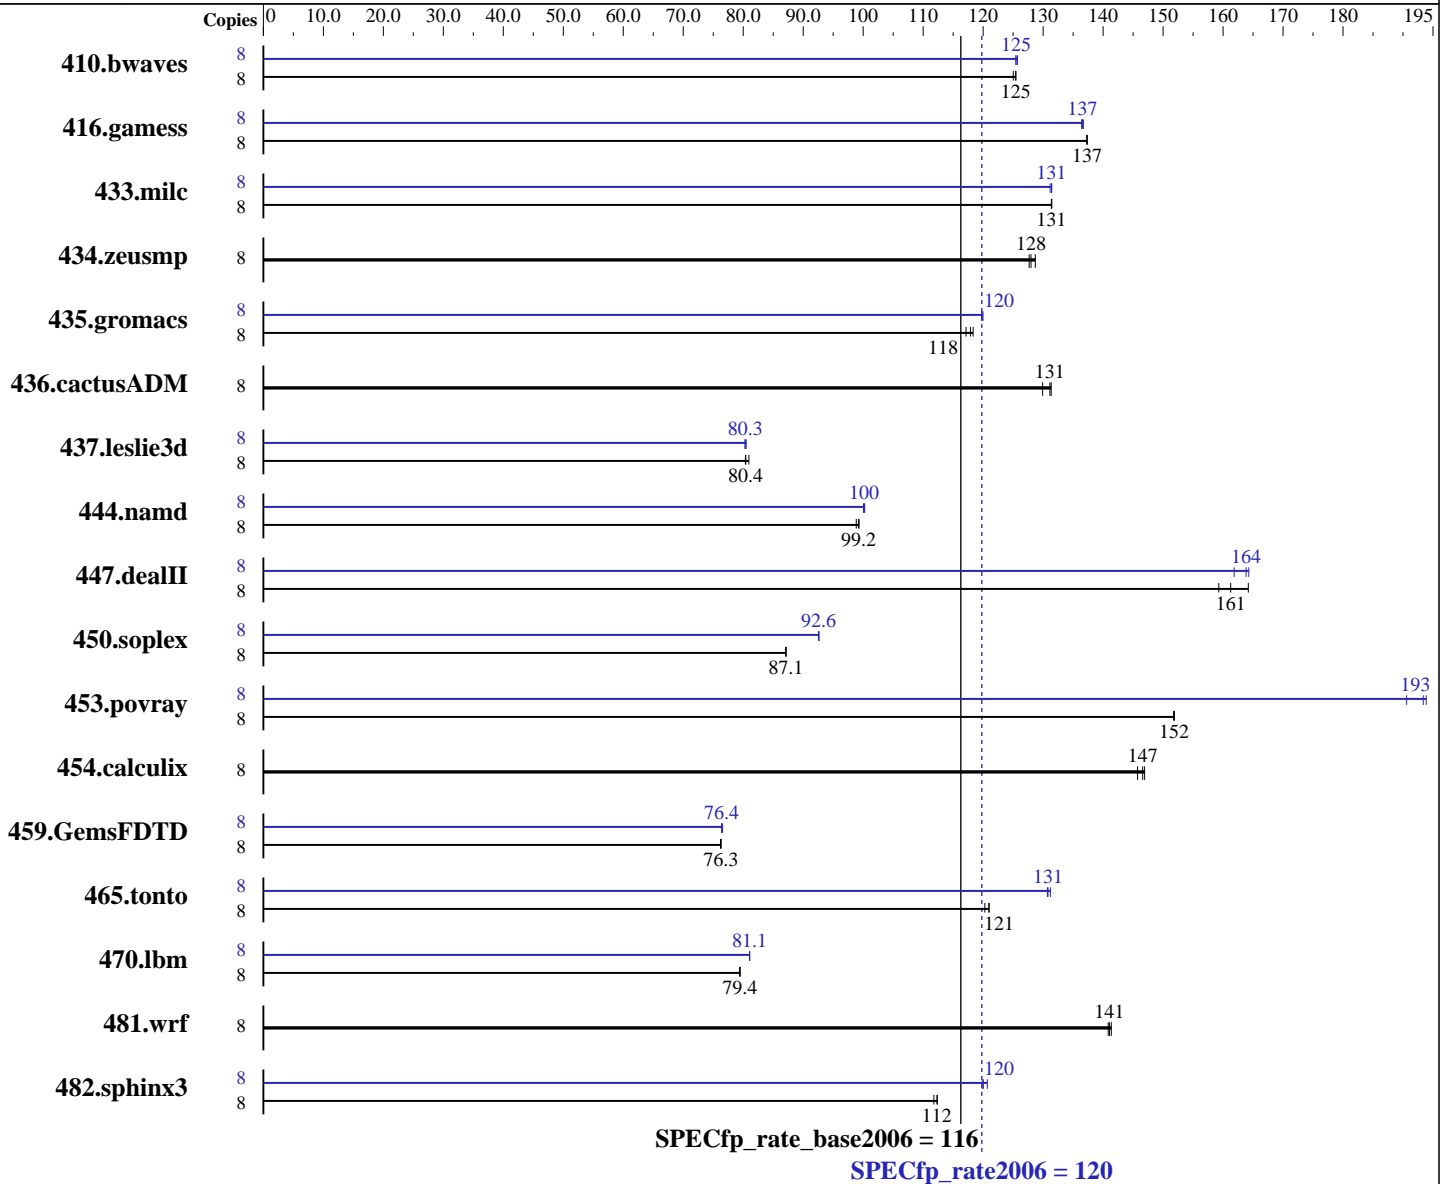

Hardware

CPU Name: Intel Xeon E5506
 CPU Characteristics:
 CPU MHz: 2133
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2,
 SP2 with patch Linux kernel 20090119,
 Kernel 2.6.16.60-0.34-smp
 Compiler: Intel C++ and Fortran Professional Compiler for
 IA32 and Intel 64, Version 11.1
 Build 20091130 Package ID: l_cproc_p_11.1.064,
 l_cprof_p_11.1.064
 Auto Parallel: No
 File System: ReiserFS

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 F2
(Intel Xeon E5506, 2.13 GHz)

SPECfp_rate2006 = 120

SPECfp_rate_base2006 = 116

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Mar-2010

Hardware Availability: Jan-2010

Software Availability: Dec-2009

L3 Cache: 4 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12 x 4 GB PC3-10600R, 2 Rank, CL9-9-9, ECC, running at 800 MHz)
Disk Subsystem: 1 x 73 GB SAS, 10000 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	870	125	867	125	867	125	8	866	125	867	125	865	126
416.gamess	8	1141	137	1141	137	1141	137	8	1148	136	1147	137	1146	137
433.milc	8	559	131	559	131	559	131	8	560	131	559	131	559	131
434.zeusmp	8	569	128	566	129	570	128	8	569	128	566	129	570	128
435.gromacs	8	483	118	485	118	488	117	8	476	120	477	120	477	120
436.cactusADM	8	729	131	728	131	736	130	8	729	131	728	131	736	130
437.leslie3d	8	929	80.9	936	80.4	935	80.4	8	936	80.3	934	80.5	936	80.3
444.namd	8	649	98.8	646	99.2	646	99.3	8	641	100	640	100	641	100
447.dealII	8	567	161	575	159	557	164	8	559	164	557	164	565	162
450.soplex	8	766	87.1	766	87.1	766	87.1	8	721	92.6	720	92.6	721	92.6
453.povray	8	280	152	280	152	280	152	8	220	193	220	194	223	191
454.calculix	8	450	147	449	147	453	146	8	450	147	449	147	453	146
459.GemsFDTD	8	1113	76.3	1114	76.2	1112	76.3	8	1109	76.6	1111	76.4	1111	76.4
465.tonto	8	651	121	651	121	654	120	8	600	131	602	131	602	131
470.lbm	8	1383	79.5	1384	79.4	1384	79.4	8	1356	81.1	1356	81.1	1356	81.1
481.wrf	8	633	141	634	141	632	141	8	633	141	634	141	632	141
482.sphinx3	8	1388	112	1388	112	1395	112	8	1292	121	1299	120	1301	120

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

General Notes

The Dell PowerEdge R710 and the Bull NovaScale R460 F2 models are electronically equivalent. The results have been measured on a Bull NovaScale R460 F2 model.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 F2
(Intel Xeon E5506, 2.13 GHz)

SPECfp_rate2006 = 120

SPECfp_rate_base2006 = 116

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Mar-2010
Hardware Availability: Jan-2010
Software Availability: Dec-2009

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.lelie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -static



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 F2
(Intel Xeon E5506, 2.13 GHz)

SPECfp_rate2006 = 120

SPECfp_rate_base2006 = 116

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Mar-2010
Hardware Availability: Jan-2010
Software Availability: Dec-2009

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -ansi-alias -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 F2
(Intel Xeon E5506, 2.13 GHz)

SPECfp_rate2006 = 120

SPECfp_rate_base2006 = 116

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Mar-2010
Hardware Availability: Jan-2010
Software Availability: Dec-2009

Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 F2
(Intel Xeon E5506, 2.13 GHz)

SPECfp_rate2006 = 120

SPECfp_rate_base2006 = 116

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Mar-2010
Hardware Availability: Jan-2010
Software Availability: Dec-2009

Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 07:18:35 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 April 2010.