



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 2610

IBM Power 780 (3.86 GHz, 64 core, SLES)

SPECint_rate_base2006 = 2340

CPU2006 license: 11


Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Dec-2009

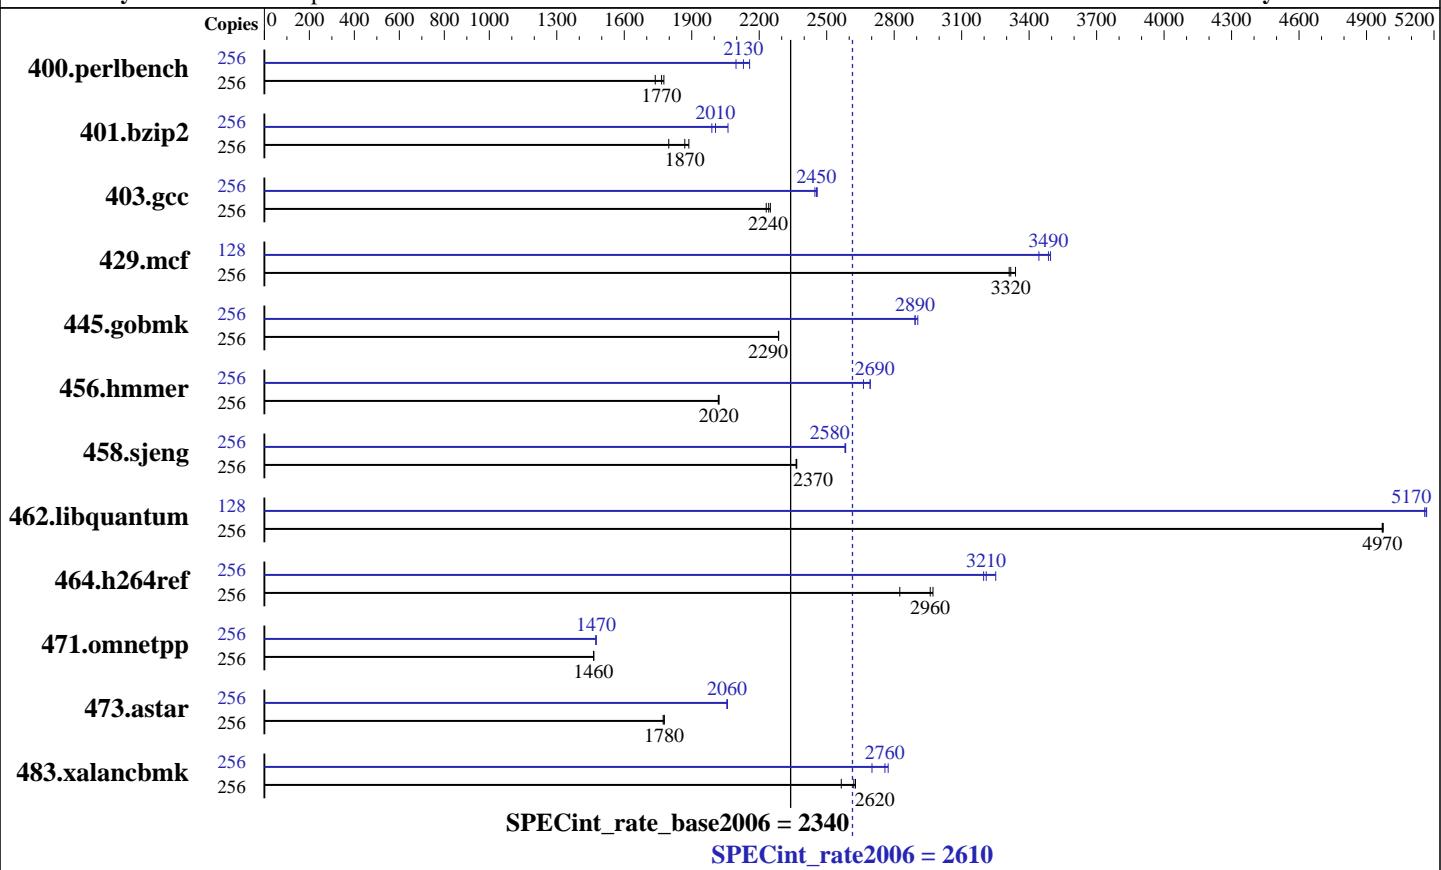

Hardware

CPU Name:	POWER7
CPU Characteristics:	Intelligent Energy Optimization enabled, up to 3.94 GHz
CPU MHz:	3860
FPU:	Integrated
CPU(s) enabled:	64 cores, 8 chips, 8 cores/chip, 4 threads/core
CPU(s) orderable:	8,16,24,32,48,64 cores
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	4 MB I+D on chip per core
Other Cache:	None
Memory:	512 GB (64x8 GB) DDR3 1066 MHz
Disk Subsystem:	6x146.8 GB SAS SFF 15K RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 11 (ppc64), Kernel 2.6.27.19-5-ppc64
Compiler:	IBM XL C/C++ for Linux, V10.1
Auto Parallel:	Updated with the Oct2009 PTF
File System:	No
System State:	ext3
Base Pointers:	Run level 3 (multi-user)
Peak Pointers:	32-bit
Other Software:	32/64-bit
	-Post-Link Optimization for Linux on POWER, Version 5.5.0-1
	-MicroQuill SmartHeap 9



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 2610

IBM Power 780 (3.86 GHz, 64 core, SLES)

SPECint_rate_base2006 = 2340

CPU2006 license: 11

Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Dec-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	256	1439	1740	1416	1770	1408	1780	256	1193	2100	1174	2130	1159	2160
401.bzip2	256	1322	1870	1374	1800	1309	1890	256	1242	1990	1232	2010	1198	2060
403.gcc	256	916	2250	919	2240	924	2230	256	839	2450	838	2460	842	2450
429.mcf	256	699	3340	704	3320	705	3310	128	334	3500	335	3490	339	3440
445.gobmk	256	1174	2290	1175	2290	1175	2290	256	924	2900	928	2890	928	2890
456.hammer	256	1182	2020	1184	2020	1182	2020	256	887	2690	887	2690	897	2660
458.sjeng	256	1309	2370	1310	2360	1310	2370	256	1199	2580	1199	2580	1200	2580
462.libquantum	256	1067	4970	1066	4970	1067	4970	128	514	5160	513	5170	513	5170
464.h264ref	256	2005	2830	1914	2960	1906	2970	256	1742	3250	1765	3210	1772	3200
471.omnetpp	256	1093	1460	1093	1460	1092	1460	256	1085	1470	1085	1470	1085	1470
473.astar	256	1014	1770	1011	1780	1011	1780	256	874	2060	873	2060	874	2060
483.xalancbmk	256	689	2560	674	2620	672	2630	256	654	2700	640	2760	637	2770

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Benchmarks bound to a processor using numactl on the submit command.

Operating System Notes

ulimit -s (stack) set to 1048576.

Large pages reserved as follows by root user:

echo 14080 > /proc/sys/vm.nr_hugepages

System configured with libhugetlbfs library for application access to large pages
Environment variables set before executing benchmarks.

export HUGETLB_VERBOSE=0

export HUGETLB_MORECORE=yes

export XLF RTEOPTS=intrinhds=1

General Notes

IBM Post-Link Optimization tool with

options "-O4 -omullX -see 0 -m power6" used for

400.perlbench 401.bzip2 403.gcc 456.hammer 458.sjeng

483.xalancbmk

options "-bf -dp -hr -las -pca -RC -RD -rmte -si -tlo -A 64 -isf 104 -lu 8 -rt 0.16
-hrf 0.18 -ihf 40 -sdp 6 -sdpm 128 -shci 65 -si -sidf 45 -omullX" used for
429.mcf

options "-q -O3 -A 32 -omullX" used for

445.gobmk

options "-bf -dp -lro -nop -RC -RD -tb -tlo -vro -A 4

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 2610

IBM Power 780 (3.86 GHz, 64 core, SLES)

SPECint_rate_base2006 = 2340

CPU2006 license: 11

Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Dec-2009

General Notes (Continued)

```
-isf 88 -lu 8 -hrf 0.10 -sdp 4 -lun 27 -omullX" used for  
462.libquantum  
options "-O4 -omullX -see 1" used for  
473.astar  
options "-O4" used for  
464.h264ref  
Whenever option "-omullX" was used during the optimization phase,  
option "-imullX" was also used during the instrumentation phase.
```

Base Compiler Invocation

C benchmarks:

```
xlc -qlanglvl=extc99
```

C++ benchmarks:

```
xlc
```

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_PPC  
462.libquantum: -DSPEC_CPU_LINUX  
464.h264ref: -qchars=signed  
483.xalancbmk: -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-O5 -qalias=noansi -qalloca -lhugetlbfs
```

C++ benchmarks:

```
-O5 -qrtti -lsmartheap
```

Base Other Flags

C benchmarks:

```
-qipa=noobject -qipa=threads
```

C++ benchmarks:

```
-qipa=noobject -qipa=threads
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 2610

IBM Power 780 (3.86 GHz, 64 core, SLES)

SPECint_rate_base2006 = 2340

CPU2006 license: 11

Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Dec-2009

Peak Compiler Invocation

C benchmarks:

xlc -qlanglvl=extc99

C++ benchmarks:

xlc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_PPC

462.libquantum: -DSPEC_CPU_LINUX

464.h264ref: -qchars=signed

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qalias=noansi
-lsmartheap

401.bzip2: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=auto
-qtune=auto -lhugetlbfs

403.gcc: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qalloca
-lhugetlbfs

429.mcf: -Wl,-q -O5 -qnoenablevmx -lhugetlbfs

445.gobmk: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qnoenablevmx
-lhugetlbfs

456.hmmer: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -lhugetlbfs

458.sjeng: -Wl,-q -O5 -lhugetlbfs

462.libquantum: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qnoenablevmx
-q64 -lhugetlbfs

464.h264ref: Same as 456.hmmer

C++ benchmarks:

471.omnetpp: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qrtti -lsmartheap

473.astar: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qnoenablevmx
-lsmartheap

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 2610

IBM Power 780 (3.86 GHz, 64 core, SLES)

SPECint_rate_base2006 = 2340

CPU2006 license: 11

Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Dec-2009

Peak Optimization Flags (Continued)

483.xalancbmk: -Wl,-q -O5 -lsmartheap

Peak Other Flags

C benchmarks:

-qipa=noobject -qipa=threads

C++ benchmarks:

-qipa=noobject -qipa=threads

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20100302.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20100302.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 07:15:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 April 2010.